

# GODFREY PONTOON BOATS

**Owner's Manual** 

#### **FUEL SYSTEMS**

Boats manufactured for use in California for model year 2018 and after meet the California EVAP Emissions regulation for spark-ignition marine watercraft. Boats meeting this requirement will have the following label affixed near the helm.

#### **WARNING**

Operating, servicing and maintaining a recreational marine vessel can expose you to chemicals including engine exhaust, carbon monoxide, phthalates and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, service your vessel in a well-ventilated area and wear gloves or wash your hands frequently when servicing this vessel. For more information go to: www.P65warnings.ca.gov/marine

The fuel system in boats marketed in states other than California complies with U.S. EPA-mandated evaporative emission standards at time of manufacture using certified components.

#### **CALIFORNIA AIR RESOURCES BOARD (CARB)**

Outboard, sterndrive and inboard powered boats sold in the state of California are equipped with special components and certified to meet stricter environmental standards and exhaust emissions. All boats sold in California since 2009 are required to meet Super-Ultra-Low (four-star) emissions.

#### **EXHAUST EMISSIONS**



Sterndrive and inboard marine engine powered boats meeting CARB's exhaust emission standards are required to display the four-star label on the outside of the hull above the waterline. Outboard and personal watercraft marine engines may also comply with these standards.

#### **A** DANGER

Carbon monoxide (CO) can cause brain damage or death. Engine and generator exhaust contains odorless and colorless carbon monoxide gas. Carbon monoxide will be around the back of the boat when engines or generators are running. Signs of carbon monoxide poisoning include nausea, headache, dizziness, drowsiness and lack of consciousness. Get fresh air if anyone shows signs of carbon monoxide poisoning. See engine manufacturer's manual for information regarding carbon monoxide poisoning.

## WELCOME ABOARD!

You are joining thousands of other families who are enjoying the pleasure of boating. Godfrey Pontoons, the manufacturer of your new boat, has been making boats since 1958. Our family of skilled craftsmen and women are dedicated to making your boat the best value on the market today.

Whether you choose to fish, ski, or just leisurely cruise around, pontoons provide a safe place on the water for your whole family. And there's always enough room for everyone to join in on the fun. Celebrate life together as family time equals cherished family memories on a pontoon. We wish you many days of boating enjoyment.

We have carefully assembled the information in this manual to assist you in the proper operation of your new boat.

Highwater LLC, doing business as Godfrey Marine, Godfrey Pontoons and Hurricane Deck Boats, will be referred to as Godfrey Pontoons (GDY) throughout this document.

#### Please take the time to read this manual before operating your boat!

Supplier manuals for audio equipment and other components have been included in your owner's manual packet. Be sure to read these manuals and be familiar with their content. If you have any questions, please contact your dealer or our Customer Service Department at 574-522-8381.

All Godfrey Pontoons are NMMA (National Marine Manufacturers Association) Certified to ABYC (American Boat & Yacht Council) standards, which far exceed federal U.S. Coast Guard requirements. NMMA certification assures that your boat was designed and tested for safety at the time of manufacture.

## DEALER RESPONSIBILITIES

Although your boat has undergone a series of rigid inspections throughout the manufacturing process, the final factory check is not the last one before you take delivery. Your dealer should perform additional pre-delivery checks and service your new boat in preparation for delivery. Dealer responsibilities include providing:

- An adequate orientation in the general operation of your boat
- An explanation of safety consideration regarding the use of systems and components
- A complete Owner's Manual Packet containing literature and information regarding your boat and its separate warranted products, warranty and registration cards
- A review of all warranties and registration requirements



## GODFREY PONTOONS LIMITED WARRANTY

Limited warranty for Sanpan, XP, AquaPatio, Monaco, Sweetwater and Sweetwater Xperience pontoon boats (the Product). Manufactured by Godfrey Marine (GDY) sold in the United States and Canada.

#### WARRANTY TERM:

Limited Lifetime Warranty: Subject to the terms and conditions set forth below, GDY warrants the marine-grade pressure treated deck panels (PTP) for life against rot only. Lifetime warranty on (PTP) means so long as the original retail owner owns the Product. Additionally, the original retail owner may transfer the (PTP) warranty. Upon transfer of the Product, the documented second owner shall have a limited (PTP) warranty for a period not to exceed 10 years from the date of purchase of the Product by the original retail owner. GDY also warrants the pontoon tubes, rails, gates and under deck structure against any structural failures so long as the original retail owner owns the Product.

Limited 10-Year Warranty: Subject to the terms and conditions set forth below, GDY warrants the Products that it manufactures for a period of ten (10) years. This warranty extends to the first retail purchaser only and begins on date of delivery to first retail purchaser.

Specific exclusions to the 10-year warranty include all electrical, electronic and hydraulic Products. For these specific categories of Products, subject to the terms and conditions set forth below, GDY warrants for a period of five (5) years. This warranty extends to the first retail purchaser only and begins on the date of delivery to the first retail purchaser.

All warranties are subject to a "normal use" requirement. Normal use means for recreational purposes only.

Written notice of defects subject to warranty coverage (including a written explanation of the alleged defect or issue) must be given to Godfrey Marine, P.O. Box 1158, Elkhart, IN 46515 within 30 days after the defect is initially discovered by the retail purchaser or second owner. This notice must be received by GDY during the applicable warranty coverage term or within 30 days after its expiration. If GDY determines that a component part of the Product covered by this Limited Warranty fails as a result of a manufacturing defect during the warranty coverage term, that part will be repaired or replaced. If repairs or replacements are required, they will be made without charge after the Product is delivered to a GDY authorized service center. Exclusions are set forth below.

#### **OWNER'S OBLIGATIONS:**

GDY encourages all boat owners to practice safe boating procedures by following rules and regulations of your waterways. We recommend that no person operate any marine product before taking a USCG approved course in safe boat handling procedures or its equivalent and without having fully reviewed all product manuals and procedures.

The owner is required to register the boat or confirm with the selling dealer that the boat has been registered within 15 days of delivery. Failure to register the boat could result in warranty coverage being delayed or voided.

The owner is responsible for normal maintenance, cleaning, and proper care of their boat. See Owner's Manual for maintenance, cleaning, and proper care instructions and requirements. Minor adjustments needed as a result of ordinary wear and tear and maintenance may be performed by the selling dealer, provided the owner makes boat available at dealership, during the first 90 days of the warranty coverage term. Thereafter, such adjustments are the responsibility of the owner as normal maintenance unless required as a direct result of repair or replacement of a defective part covered under this warranty. The owner shall be responsible for any and all transportation costs to a GDY designated warranty service facility for warranty service.

In some instances, circumstances may require that the boat or certain components be returned to the GDY manufacturing facility for warranty service. Costs incurred for transporting the boat or components to and from GDY is the responsibility of the owner.

#### **DEALER'S OBLIGATIONS:**

The selling dealer is obligated to properly maintain and protect the Product against weather elements that promote deterioration prior to retail sale, to perform a detailed pre-delivery inspection, and provide warranty service to all GDY customers (regardless of whether the dealer actually sold the relevant Product to the GDY customer). The selling Dealer must perform a detailed post-delivery inspection and report any damages or shortages within 30 days after receiving the shipment from GDY.

If the selling dealer is unwilling to resolve a problem which the owner believes is covered by this warranty, the owner should write GDY at the address listed above or fax GDY at (574) 522-5120, attention Warranty Service Department, with a description of the problem and attempts made to resolve it. GDY will review the problem to determine if this warranty is applicable. Any selling or servicing dealer is not GDY's agent, but an independent entity.



#### **EXCLUSIONS:**

This warranty does not cover or include:

- 1. Equipment and appliances (such as engines, outdrives, propulsion systems and batteries), which are not manufactured by GDY and that are warranted directly by their respective manufacturer. Copies of those written warranties are to be provided to owner by selling dealer at time of retail sale.
- 2. Dealer or customer installed electronics, wiring, equipment and appliances.
- 3. Damage caused, directly or indirectly, by or related to:
  - a. Environmental conditions (salt, hail, lightning strike on vessel or in vicinity, freeze damage, road salt, chemicals in the atmosphere, mold, etc.)
  - b. Accidents, misuse, negligence, overloading, or improper handling.
  - c. Failure to perform normal or routine maintenance.
  - Alteration or modification of the Product, including but not limited to, nonfactory installed equipment, alterations for and/or use for racing.
  - e. Improper trailering, improper trailer set up or failure to use a transom saver.
  - f. Use of carpeted bunk trailers in a salt water environment.
  - g. Corrosion issues including but not limited to Electrolysis, Galvanic Corrosion, Rust, Barnacles or Zebra Mussels.
  - h. Mold, Mildew or Microbial Pinking Vinyl.
  - Thermal cracking of Gel Coat or Temperature variations including but not limited to infrared heaters and other high output heat sources.
  - j. Damage caused by pets, animals, birds or any airborne debris.
  - k. The use of cleaning solutions or methods not approved in writing by GDY.
  - Damage caused, directly or indirectly, by or related to improper use of ski tow bar.
  - Mormal deterioration due to ordinary wear, tear, or exposure, including but not limited to, fading or sun damage of upholstery vinyl, fabrics or carpet wear.
- **4.** Express (Air) fees for shipping of warranty replacement parts.
- Normal business costs associated with ordering warranty replacement parts or filing warranty labor claims.
- **6.** Noises and vibration harmonics associated with the movement of components including but not limited to squeaking, creaking and humming.
- 7. The match of color of any replacement to original upholstery vinyl or canvas.
- 8. Cost for local repair or replacement of upholstery in excess of \$2,500.
- Loss of time, inconvenience, boat payments, retail charges, travel expenses, loss of use, in-and-out water charges, loading or off-loading fees, move-in or move-out fees, towing and storage charges, loss or damage to personal property, or other remedies not specifically allowed.



- Normal service items such as light bulbs, fuses, lubricants, and routine maintenance.
- 11. Any Product used for commercial purposes or used as a leased or a rental unit. Commercial unit means used for any business, for profit, income purposes, or non-consumer use at any time.
- **12.** Any pontoon used in salt water, unless prior to said use pontoon is protected by proper application of an approved for aluminum bottom paint free from copper or copper derivatives by a licensed applicator.
- **13.** Gel coat surfaces, including but not limited to cracking, crazing, discoloration or blistering.
- **14.** Any Product, unless manufacturer approved, that has been repossessed or purchased through an auction or a non-authorized GDY Dealer.
- **15.** Any published or stated performance characteristics or specifications including, but not limited to speed or fuel and oil consumption.
- 16. Any and all transportation costs incurred in delivering the Product to or returning the Product from a GDY authorized service center.
- 17. Helm and Helm Components match (color, style, size, footprint, brand) of a replacement helm or component of the existing helm if the original helm or component is no longer available.
- 18. Boat accessories including but not limited to Tables, Bases, Pedestals (color, style size, footprint, brand) if such a replacement accessory is no longer available.



LIMITATIONS, EXCLUSIONS, AND DISCLAIMER OF IMPLIED WARRANTIES:

ANY IMPLIED WARRANTY THAT IS FOUND TO ARISE BY WAY OF STATE OR FEDERAL LAW, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, OR ANY IMPLIED WARRANTY OF FITNESS, IS LIMITED IN DURATION TO THE DURATIONS SET FORTH IN THIS LIMITED WARRANTY AND IS LIMITED IN SCOPE OF COVERAGE TO THE SCOPE OF THE COVERAGE OF THIS LIMITED WARRANTY. GDY makes no warranty of any nature beyond that contained in this limited warranty.

GDY WILL NOT BE RESPONSIBLE FOR AND EXPRESSLY DISCLAIMS ANY AND ALL INCIDENTAL, CONSEQUENTIAL, AND PUNITIVE DAMAGES INCLUDING BUT NOT LIMITED TO LOSS OF USE OF THE PRODUCT, LOSS OF TIME, INCONVIENENCE, EXPENSE FOR TRAVEL, LODGING, TRANSPORTATION CHARGES, LOSS OR DAMAGE TO PERSONAL PROPERTY OR LOSS OF INCOME THAT MAY RESULT FROM BREACH OF THIS LIMITED WARRANTY OR ANY IMPLIED WARRANTY. THIS EXCLUSION OF CONSEQUENTIAL AND INCIDENTAL DAMAGES SHALL BE INDEPENDENT OF ANY FAILURE OF THE ESSENTIAL PURPOSE OF THE WARRANTY, AND THIS EXCLUSION SHALL SURVIVE ANY DETERMINATION THAT THIS LIMITED WARRANTY OR ANY IMPLIED WARRANTY HAS FAILED OF ITS ESSENTIAL PURPOSE.

It is the intent of GDY to comply with the Magnuson-Moss Warranty Act and the Federal Trade Commission's prescribed rulings. GDY is not liable for and will not recognize any warranty other than the implied warranties under state law and the written warranty contained in this document. In other words, no other warranty, written or oral, is given by GDY. Please note, however, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation on damages may not apply to you. Some states also do not allow limitations on how long an implied warranty lasts, so the above limitation on the term of the implied warranty may also not apply to you.

Any action to enforce any portion of this limited warranty, or any implied warranty, must be commenced within one year after the claim accrues. Any performance of repairs after the warranty coverage periods have expired, or performance of repairs regarding anything excluded from coverage under this limited warranty shall be considered "good will repairs", and they will not alter the express terms of the limited warranty or extend the warranty coverage periods. Some states do not allow a reduction in the statute of limitations, so this reduction may not apply to you.

#### **NON-AMENDABLE OR TRANSFERABLE:**

Except as otherwise stated herein, these warranties are not assignable or transferable. This warranty may be altered only in writing by GDY and not by any GDY dealer. Any modification or additional statements concerning warranty by persons other than GDY personnel are not the responsibility of GDY and should not be relied upon.

#### **CHOICE OF LAW; JURISDICTION AND VENUE:**

This warranty shall be governed exclusively by, and construed exclusively in accordance with, the internal laws of the State of Indiana with reference to the choice of law or conflict of law principles thereof, and all claims relating to or arising out of this warranty, or the breach thereof, whether sounding in contract, tort or otherwise, shall likewise be governed exclusively by the laws of the State of Indiana without reference to the choice of law or conflict of law principles thereof. To the extent any action is permitted in a court of competent jurisdiction, the exclusive venue for such action is a state court sitting in Elkhart County, Indiana, or the United States District Court for the Northern District of Indiana, South Bend Division. The parties hereby waive any claim or defense that such forum is not convenient or proper. Each party agrees that any such court shall have *in personam* jurisdiction over it for any such action, and each party consents to service of process in any manner authorized by Indiana law.

#### **OWNER REGISTRATION:**

The filing of owner registration may be performed online by your selling dealer at the time of the sale or during the pre-delivery inspection. In the event the selling dealer does not register your Product with GDY, Owner must register the Product with GDY within 15 days of Owner's purchase. Please contact **Godfrey Marine**, **P.O. Box 1158, Elkhart, IN 46515** to register your Product.

WARNING: OWNER REGISTRATION INFORMATION MUST BE ON FILE WITH THE WARRANTY DEPARTMENT. Failure to file this warranty registration with GDY will not affect your rights under this limited warranty provided you can present proof of purchase, but it can cause delays in obtaining the benefits of this limited warranty, and it may inhibit any servicing facility's ability to provide proper repairs and/or part replacement.

#### LEGAL RIGHTS:

This warranty gives you specific legal rights and you may also have other rights, including but not limited to, those provided by the Magnuson-Moss Warranty Act, 15 <u>U.S.C. § 2301 et</u> seq. as well as other rights which may vary from state to state.



## **GENERAL INFORMATION**

Immediately after purchasing the boat, record the following often-needed information for handy reference. This information may also be very important in case emergency service is required. Also, make a copy of this information and store it in a safe place away from your boat.

#### **DEALER INFORMATION**

Name:			
Salesman:			
Service Manager:			
Address:			
City:	State:	Zip:	
Phone:	1	1	

#### MANUFACTURER INFORMATION

Customer Service Department Godfrey Pontoons 4500 Middlebury Street Elkhart, IN 46516 (574) 522-8381 FAX: (574) 522-5120

#### **ADDITIONAL NOTES:**

#### **INSURANCE INFORMATION**

Agent:

Trailer #:

Prop Size:

Ignition Key #:
Glove Box Key #:
Engine Model:

Company:				
Address:				
City:	State:	Zip:		
Phone:				
Policy #:				
IMPORTANT NUMBERS				
Purchase Date:				
Model #:				
Hull Identification #:				
U.S.C.G. Boat Reg. #:				
Engine #:				

Safety Note: Godfrey recommends that all persons take a USCG-approved course in safe boat handling procedures or its equivalent along with fully reviewing, in detail, all boat product operating manual and procedures.



This Page Intentionally Left Blank

Welcome Aboard!	i
Dealer Responsibilities	
Godfrey Pontoons Limited Warrantyi	
General Information vii	
Dealer Information vi	ii
Introduction	1
Congratulations1-	1
About This Manual	
About Your New Boat1-2	2
Boat Terminology	2
Hull Identification, Capacity and Safety Plates 1-2	2
Design Category	4
Disclaimer1-4	
References and Contact Information	5
Safety	
Good Boating Practices	
Safety and Training2-	
Strong Points2-	
Safety Labels2-	
Safety Label Locator	
Safety Statements2-1	
Safety Precautions	2
Required Boating Safety Equipment and	_
Regulations	
Fire Extinguisher	
Engine Emergency Stop Switch and Lanyard2-20	
Life Jackets	
Visual Distress Signaling (VDS) Devices	
Audible Signaling Devices	
Navigational Lights	
Recommended Safety Equipment	
Very High Frequency (VHF) Radio2-29	
Personal Location Beacon (PLB)2-30	
Situational Awareness	
Driving Defensively	
Knowing the Roat 2-3	

31
32
33
33
34
35
-1
-1
-1
-2
-2
-2
-3
-3
-3
-4
-4
-5
-6
-6
-7
-7
-7
-8
-8
-8
-8
10
-1
-1
-1
-1
-2
-3
-4
-5
-5
33333

Dangerous Weather	4-6
Engine or Boat System Failure	4-6
Accidents, Collisions and Giving Assistance	4-6
Towing on the Water	4-7
Law of Salvage	
Hurricane and Severe Weather Preparedness	
Protecting the Boat from Theft	
Operating in Hazardous Conditions	
Severe Weather	
Storm Conditions	
Fog Conditions	
Reduced Visibility	
Cold Weather	
Water Hazards	
Aquatic Vegetation / Weeds	
Dams and Spillways	
Shallow Water Operation	
Markers, Warnings and Advisories	
Boat Flags	
Harbor Flags and Indicators	
Navigation Rules and Aids	
Rules of the Road	
Right-of-Way	
Crossing	
Meeting Head-On	
Overtaking / Passing	
Audible Signals	
Aids to Navigation	
Buoys	
Daymarks / Dayboards	
Lights and Lighted Structures	
Markers	
Navigational Lights and Night Operation	
Operating the Boat	
Before Getting Underway	
Safety Equipment	
Float Plan	

	Pre-Departure Safety Checklist	7-2
	Boarding	7-3
	Boat Loading	
	Fueling	7-5
	Fuel Management	
	Fuel Suppliers	7-5
	Static Electricity and the Fuel System	
	Fuel (Gasoline)	7-6
	Before Refueling	
	Refueling	7-8
	Refueling Built-In Fuel Tanks	7-9
	After Refueling	7-9
	Outboard Engine Fueling Considerations	7-9
	Getting Underway	<sup>7</sup> -10
	Starting	<sup>7</sup> -10
	Steering	<sup>7</sup> -11
	Shifting	<sup>7</sup> -12
	Stopping	<sup>7</sup> -13
	Accelerating and Running Underway 7	<sup>7</sup> -14
	Checks After Operation	<sup>7</sup> -16
	Trim and Tilt	
	Power Trim	
	Performance Operation	<sup>7</sup> -19
	Docking	<sup>7</sup> -19
	Mooring	
	Covering	
	Cabana Enclosures	
	Anchors and Anchoring	
	Lines and Knots	
Traile	ring and Launching	
	Legal Considerations	
	Trailer Classification	
	Trailer Type	
	Trailer Gross Vehicle Weight Rating	
	Towing Vehicle	
	Vehicle Towing Hitch	
	Hitch Ball and Trailer Coupler	8-3

Safety Chains
Trailer Brakes
5-Pin Wiring Connector
Transom Saver
Trailering Guidelines8-6
Engine-Transom Support Bracket8-6
Pontoon Boat Considerations
Trailer Towing Tactics
Backing Up
Launching8-12
Loading Guidelines8-14
Reporting Safety Defects
Boat Features and Options9-1
Electrical System
DC System
Engine Lubrication System
Engine Cooling System
Fuel System9-3
Shift and Throttle Controls
Neutral Start Safety Switch
Single-Lever Controls - Single or Twin Engine9-4
Control Operation Guidelines
Safety Systems9-6
Engine Emergency Stop Switch and Lanyard9-6
Steering System
Mechanical Steering
Hydraulic Steering
Electric Steering9-8
Propellers
Propeller Selection and Replacement
Guidelines
Gauges / Instruments
Display Panels9-11
Multi-Gauges9-12
Fuel Level Gauge9-12
Oil Level Gauge (Outboard Engine Oil
Injection Optional)

Speedometer	9-13
Tachometer	9-13
Trim / Tilt Gauge	9-13
Voltmeter	
Water Pressure Gauge	9-14
Water Temperature Gauge	9-14
Hour Meter	9-15
Accessory Ports	9-15
Water Depth Gauge	9-15
Compass	9-16
Helm and Control Switches	9-16
Trim / Tilt Switch	9-16
Boarding and Courtesy Light Switches	9-17
Docking Lights Switch	9-17
Horn Switch	9-17
Ignition Switch	9-17
Accessory Switch	9-17
Navigation Lights Switch	
Fuel-Burning Appliances	9-18
General Operation of Fuel-Burning	
Appliances	
Propane Gas Grill	
Fishing Models	9-21
Livewell	
Fishing Seats	9-22
Re-Boarding Ladder	
Raw Water Washdown	
Symbols	
ral Care and Maintenance	
Safety Equipment	
Life Jackets	
Boating Equipment	
Corrosion Protection	
Galvanic Corrosion	
Saltwater Corrosion	
Aluminum Pontoons and Hulls	
Sacrificial Anodes	10-6

Hardware, Fasteners and Fittings	10-8
Electrical System	10-8
Batteries	10-9
Circuit Breakers and Fuses	
Motor Pod	10-13
Bilge Pump	
Engine	
Fuel System	
Steering System	10-14
General Cleaning and Maintenance	10-15
Marine Growth	10-15
Cleaning	10-16
Hull	10-16
Vinyl Upholstery	10-17
Vinyl Care and Cleaning Guide	10-18
Canvas Covers and Bimini Tops	
Non-Skid Flooring	
Carpet	
Flooring	
ABS Plastic Panels	
Windshield	
Mooring and Trailering Covers	
Stainless Steel and Chrome Hardware	
Aluminum Hardware	
Trailer	
Maintenance Schedule	
Winterization and Storage	
Lifting	
Winterization and Storage Preparation	
Storing on a Cradle or Blocks	
Storing on a Trailer	
Storing During the Summer	
Recommissioning After Storage	
Troubleshooting	
Glossary of Nautical Terms	
Index	I-1



This Page Intentionally Left Blank

## Section 1 INTRODUCTION

#### CONGRATULATIONS

Congratulations and welcome aboard! To ensure each boating experience is a safe and enjoyable one, please read all the literature provided with your newly purchased boat carefully before operating the boat or any equipment.

Please keep this manual on board for future reference and pass all information along to the new owner if you ever decide to sell the boat.

#### **ABOUT THIS MANUAL**

This manual has been written as a general guide to safe operating practices, boating regulations and maintenance techniques for recreational boating. If this is your first time owning or operating a boat, it is recommended that you contact the boat dealer or local boating agency to find out how to enroll in a boater safety course prior to operating the boat.

This manual is not intended to be used as a replacement for specific information and procedures covered in manuals provided by the manufacturer of the engine, drive, accessories and other major equipment.

Because we are constantly working toward product improvement, this manual is intended to be a general guide only. The illustrations used in this manual may not match the equipment on the boat; they are intended only as general reference views.

This information is supplied with the understanding that the boat will be operated with good seamanship and attention to safe loading, safe operating conditions and safe speed. The manner in which the boat is loaded and operated is the responsibility of the operator.




#### **ABOUT YOUR NEW BOAT**

#### **BOAT TERMINOLOGY**

It is important that you understand, learn and use appropriate and common nautical terminology while boating to ensure operator safety and the safety of others.

See the Glossary of Nautical Terms section of this manual for additional boating terminology.

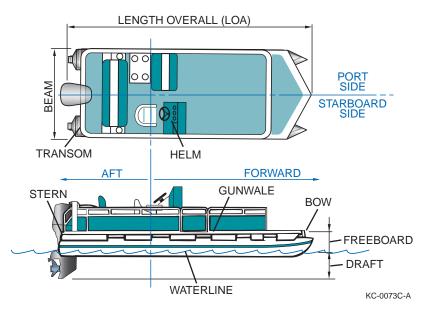

#### **HULL IDENTIFICATION. CAPACITY AND SAFETY PLATES**

#### **Hull Identification Number**

The hull identification number (HIN) is usually located near the upper starboard corner of the transom on the outside of the boat. In some instances, the HIN may be located in an alternate location as determined by the manufacturer (e.g., a pontoon HIN may be located on the aft crossmember from the starboard hull attachment). The HIN must be clearly visible and may not be removed, altered or tampered with in any way as regulated by federal law.

In case of collision, theft or damage, report these numbers to the local authorities, the insurance agent and the dealer.

Safeguard information about the boat by recording the HIN and model of the boat, and model and serial numbers of the engine and accessories on the Boat Information Form in this manual.

#### U.S. Coast Guard Safety Standards Compliance Plate

All power boats less than 20 feet (6 meters) must have a manufacturer's compliance plate clearly indicating that the boat is in compliance with the U.S. Coast Guard (USCG) safety standards and the effective date of the compliance. The compliance plate may be combined onto one plate showing both the capacity plate and compliance information by the manufacturer.

As a division of the U.S. Department of Homeland Security, the USCG is the ultimate authority on U.S. waters. The USCG has the right to board any boat for any reason at any time. Failure to obey an order from the USCG can result in a fine, confiscation, imprisonment and even being fired upon in certain areas or conditions

#### Certification Standards

The boat was built to meet federal USCG requirements and may be certified to more stringent American Boat & Yacht Council (ABYC) standards for the fuel, electrical, ventilation, flotation, horn, identification, capacity, placards and labels, powering, start-in-gear protection, navigation lights, backfire flame control and in most cases, fire extinguishers.

The boat owner is responsible for other USCG-required safety items, which can vary depending on the size of the boat as follows:

- Fire Extinguishers
- Life Jackets
- Visual Distress Signals

In addition to the USCG-required safety items, Godfrey recommends always carrying an anchor and throwable Type IV PFD at all times. See Safety for the full list of recommendations. The boat manufacturer or dealer may provide some required safety items. Your boat may not be certified to ABYC standards; check the capacity plate for more information.



The person/load capacity is determined by the USCG. The capacity plate is usually located within clear visibility of the boat operator or helm area. The capacity plate indicates limits for loading the boat, which are enforceable by law. Never exceed the "U.S. Coast Guard Maximum Capacities" indicated on the capacity plate.

Boats in the National Marine Manufacturers Association (NMMA) Certification program up to 26 feet (7.9 meters), or a pontoon boat of any length, are certified to ABYC standards, have the USCG maximum rated load capacity on the certification plate and may contain EPA and/or CARB emission information. Do not



exceed maximum person or weight capacities. Add the weight of all persons on board; the total weight must not exceed the maximum weight capacity, so it is possible that fewer people than the maximum number can safely ride in the boat.

#### DESIGN CATEGORY

Pontoon boats are designed for casual cruising in calm conditions in sheltered waters; Category D. Wave heights over 1 foot (0.3 m) make pontoon boating uncomfortable. Waves over 2 feet (0.6 m) can be dangerous and should be avoided as severe structural damage could occur that may not be covered by warranty.

If you use your pontoon in the Great Lakes or ocean, you should confine your cruising primarily to bays and inlets and constantly monitor the weather for changes. A pontoon is not made to be an oceangoing craft and as such can only be used if the water conditions are similar to an inland lake and only close to shore.

#### DISCLAIMER

This Owner's Manual is provided for information and educational purposes only and is not intended to offer or provide legal advice or create a contractual relationship. Please be aware that as a boat owner, you have responsibilities regarding the safety, maintenance, fitness and operation of the boat which cannot be delegated to anyone else. The extent of such responsibilities is ultimately determined by Federal law and regulations, the general maritime law of the United States, the laws and regulations of the states and territories of the United States, or the laws and regulations of the country where you operate the boat.

#### REFERENCES AND CONTACT INFORMATION

Use the following list of publications and organizations for reference and contact information concerning safe boating, navigational rules and other boating topics.

#### **Publications**

- Bottomley, Tom. Boatman's Handbook. Hearst Marine Book. Morrow
- Brotherton, Miner. Twelve Volt Bible. Seven Seas
- Calder, Nigel. Boatowner's Mechanical and Electrical Manual. McGraw-Hill **Education**
- Chapman, Charles F. and Maloney, E.S. Chapman's Piloting, Seamanship and Small Boat Handling. Hearst Marine Book. Morrow
- Hinz, Earl. The Complete Book of Anchoring and Mooring. Cornell Maritime Press
- National Fire Protection Association. NFPA 302 Fire Protection Standard for Pleasure and Commercial Motor Craft. National Fire Protection Association
- United States Coast Guard. Navigational Rules for U.S. Waterways. Visit https://www.navcen.uscg.gov/ to view or download this publication.
- United States Coast Guard Auxiliary. Boating Skills and Seamanship Thirteenth Edition. United States Coast Guard
- Whiting, John and Bottomley, Tom. Chapman's Log and Owner's Manual. Hearst Marine Book

#### **Organizations**

#### American Boat & Yacht Council

Boat building standards. http://abycinc.org

#### American Red Cross

A resource for first aid training, emergency supplies and preparedness. http://www.redcross.org or consult the local telephone directory

#### **Boat Owners Association of The United States**

Organization of recreational boaters offering marine services, education and protecting boater's rights. http://www.boatus.com/



#### BoatU.S. Foundation for Boating Safety Hotline

Training and education outreach directly to boaters.

http://www.boatus.org/ Phone: 800-245-2628

#### National Association of State Boating Law Administrators

Boat safety training and education resources.

http://www.nasbla.org

#### National Marine Manufacturers Association

Boat, marine engine and accessory manufacturer trade association. http://www.nmma.org

#### National Oceanic and Atmospheric Administration's National Weather Service

Nautical charting, weather, fishery, ocean and climate resources. http://www.noaa.gov

#### National Safe Boating Council, Inc.

http://www.safeboatingcouncil.org

#### Sea Tow Services International, Inc.

Organization of recreational boaters providing towing and more.

http://www.seatow.com Toll free: 800-473-2869

#### U.S. Coast Guard

http://www.uscgboating.org (To contact the U.S. Coast Guard for an emergency while on the water, always use the onboard VHF-FM radio channel 16. Use cell phones only as a secondary means of communication. Call 9-1-1 to reach rescue personnel.)

#### U.S. Coast Guard Auxiliary

Information on boating safety classes and boat safety checks. http://nws.cgaux.org; Phone: 877-875-6296

#### U.S. Coast Guard Navigation Center (NAVCEN)

USCG navigation information. https://www.navcen.uscg.gov

#### U.S. Coast Guard Office of Boating Safety

USCG resources for recreational boaters. http://www.uscgboating.org

#### U.S. Coast Guard's America's Waterway Watch Program

A program for recreational boaters to assist the U.S. Department of Homeland Security in reporting suspicious activity on U.S. waterways; Phone: 877-249-2824

#### U.S. Government Publishing Office

http://www.gpo.gov

(For information and documentation on FCC rules and regulations and Skippers Course information, and other government, marine and nautical related documents)

#### U.S. Power Squadrons

Boating courses and knowledge resources. http://www.usps.org; Phone: 888-367-8777

#### Water Sports Industry Association

Water sports education, safety and risk management. http://www.wsia.net



This Page Intentionally Left Blank

## Section 2 **SAFETY**

The popularity of boating and other water sports has undergone an explosion of growth in the past few years, making safety an important issue for everyone who shares in the use of the waterways.

WARNING Operation Hazard: Read and understand this Basic Boating and Safety Manual, the Engine Operator's Manual and all manufacturer-supplied information regarding the operation of equipment. The boat operator must understand all safety information responsibilities, regulations, controls and operating instructions before attempting to operate the boat. Improper operation could result in death or serious injury.

The safety content and precautions listed in this manual and on the boat are not allinclusive. If a procedure, method, tool or part is not specifically recommended, the operator must feel confident that it is safe for them and others, and that the boat will not be damaged or become unsafe as a result of the operator's decision. REMEMBER - ALWAYS ASSESS EACH SITUATION AND USE SOUND JUDGMENT!

The boat operator is responsible for their own safety, as well as that of passengers and other boaters.

#### **GOOD BOATING PRACTICES**

Boating-related accidents are generally caused by the operator's failure to follow basic safety rules or written precautions. Most accidents can be avoided if the operator is completely familiar with the boat, its operation and the navigational rules of the road and can recognize potentially hazardous situations.

In addition to everyday safety, failure to observe safety recommendations may result in severe personal injury or death to the operator or to others. Use caution and sound judgment when operating the boat. Do not take unnecessary chances! Failure to adhere to these warnings could result in death or severe injury to the operator and/or others.

Read this entire manual and be aware of other specific safety guidelines not listed in this manual. Seek additional safety information from the USCG and state and local authorities. In addition to specific safety statements noted in this manual, a general list of safety guidelines and recommendations is listed below:

- The boat must comply with USCG safety equipment regulations.
- Before each outing, check all safety equipment such as fire extinguishers, life jackets, flares, distress flags, flashlights and engine emergency stop switch. Make sure they are operable, in good condition, readily visible and easily accessed.

## SECTION SAFETY

- Onboard equipment must always conform to the governing federal, state and local regulations.
- Never allow any type of spark or open flame on board. It may result in fire or explosion.
- Take the keys/FOBs when leaving the boat to keep untrained and unauthorized persons from operating the boat.
- Know how to react correctly to adverse weather conditions, have good navigation skills and follow navigational rules as defined by USCG, state and local regulations.
- Check local weather reports before casting off. Do not leave the dock area when strong winds and electrical storms are in the area or predicted to be in the area.
- Seek shelter from open water if lightning is an imminent threat.
- Tell someone of the travel plans before departing.
- Know the weight capacity of the boat. Never overload the boat.
- Never operate the boat while under the influence of drugs or alcohol.
- Look before turning the boat. The boater is obligated to maintain a course and speed unless it is safe to alter course and speed. Look before turning.
- Operators must read and understand all operating manuals supplied with the boat before operation.
- Whenever planning an outing, make sure that at least one passenger is familiar with the operation and safety aspects of the boat in case of emergency.
- Passengers should never sit in front of the operator; always avoid obstructing the operator's view.
- Show all passengers the location of emergency equipment and explain how to use it.
- Never allow passengers to drag their feet or hands in the water, or sit on the bow, bow pulpit, deck or gunwale while the engine is running.
- Never use or hold on to the boarding platform while the engine is running.
- Never stand or allow passengers to stand in the boat or sit on the transom, seat backs, engine cover or sides of the boat while the engine is running. The operator or others may be thrown from the boat.
- Children and nonswimmers must wear a life jacket at all times.
- Never leave children in the boat without adult supervision.
- Improper operation of the boat is extremely dangerous.
- Securely attach the engine emergency stop switch lanyard around your leg or to a part of your clothing such as a belt loop, when operating the boat. Instruct others on how to start the boat if you as an operator are thrown overboard. Consider having an extra lanyard readily available on board since the system cannot be overridden without the lanyard that is on the person who is now overboard.

- Operate slowly in congested areas such as marinas and mooring areas.
- The bow may be slippery. Do not go forward while the engine is running.
- Slow down when crossing waves or wake in order to minimize the impact on passengers and the boat.
- Never replace the boat's marine parts with automotive parts (if applicable).
- Never remove or modify any components of the fuel system. Always have qualified personnel perform fuel system maintenance. Tampering with fuel components may cause a hazardous condition.
- Avoid contact with engine exhaust gases—engine exhaust contains carbon monoxide.
- Never operate the engine in a confined space.
- Never go under the boat cover with the engine running or shortly after the engine has been running.
- Allow adequate ventilation with fresh air before entering any enclosed areas.
- Watch for other boats, swimmers and obstructions in the water. Stay away from other boats and personal watercraft (PWCs).
- Never swim near a boat when the engine is running. Even if the boat is in the NEUTRAL position, the propeller may still be turning and carbon monoxide may be present.
- Never dive from the boat without being absolutely sure of the depth of the water; severe injury or death may occur from striking the bottom or submerged objects.
- Never wrap ski lines or mooring lines around any body part. You could become entangled in the line if you fall overboard while the boat is moving.
- Keep track of ski lines and dock lines so they do not become entangled in the propeller.
- Have an experienced operator at the helm and always have at least three people present for safe towing—one to drive, one to observe, and one to ski or ride.




#### SAFETY AND TRAINING

There is a vast amount of recreational boating regulatory, safety and training information online, and much of it is free. This information covers laws, aids to navigation, rules of the road, hands-on boating safety courses, boat safety checks and much more for both novices and experienced boaters. Go to the following sites for more information:

- United States Coast Guard www.uscqboating.org
- United States Power Squadron www.usps.org
- BoatU.S. Foundation www.boatus.org

#### STRONG POINTS

Strong points are specifically designed attachment points on your boat. Use the cleats at location "A" for mooring and anchoring. Use the tube eyes at location "B" for towing if necessary.



#### SAFETY LABELS

The boat is affixed with various hazard and safety labels at the time of manufacture. These labels appear in specific locations on the boat and on equipment where safety is of particular concern. All operators of the boat must read and understand all hazard and safety labels and advise all passengers on the safety concerns and proper practices. Hazard and safety labels must remain legible. If the operator suspects a label is missing or damaged they should contact the dealer for replacement.

#### SAFETY LABEL LOCATOR

Godfrey Pontoons positions safety labels throughout the boat to warn passengers of hazards in advance so they can take appropriate action. Should a safety label become damaged or unreadable, replace it immediately; contact your dealer for a free replacement if necessary. During the pre-launch safety check the operator is responsible for pointing out the safety labels to passengers and explaining both the meaning of the labels and the appropriate actions to take. For replacement of a label, please contact your dealer.

GODFREY PART NUMBER	VENDOR PART NUMBER	DESCRIPTION	LOCATION	MODELS
404139	GD-353	WARNING: Operator multiple; includes:  Propeller injury Vision obstruction Do not store fuel in compartments Fuel system is under pressure Avoid serious injury or death from leaking fuel Do not operate underdeck lights when navigation lights are required Stern light must be vertical while anchored or underway Passengers should not ride in bow or stern fishing seats while underway Seat passengers from rear to front Sudden turns above 25 mph may cause loss of control Ski bar is not a towing device Carbon monoxide can cause brain damage or death Boater's checklist Owner's Manual & designated occupancy seating QR code	HELM	ALL
232044	GD-122	GODFREY EPA COMPLIANCE	HELM	ALL
414350	GD-324	Warning: Helm seat forward to avoid shifter for unintended acceleration	HELM	ALL

GODFREY PART NUMBER	VENDOR PART NUMBER	DESCRIPTION	LOCATION	MODELS
120021	GD-017	Warning: Do not store fuel in compartment	HELM DOOR	ALL
404138	GD-110	SAFETY LABEL SHEET IO & OB	STERN/ LADDER	ALL
		Warning: Propeller injury		
		Warning: Ladder safety		
		Danger: Carbon monoxide can cause brain damage or death		
		Warning: Ski bar is not a towing device		
		Warning: Fuel system under pressure	FUEL FILL	
		Caution: Avoid fuel blow back, fill tank slowly	FUEL FILL	
		Do not sit on gate	GATES	
		Warning: Avoid personal injury. stay inside deck rails (and gates) when boat is underway		
212939	GD-111	Warning: Class B seat	FISH SEATS	FISH BOATS
287399	GD-267	Warning: Upper deck avoid serious injury	SUNDECK LADDER	SUNDECK
235975	GD-126	Warning: Open flame ventilation	GRILL STATIONS	GRILL CENTERS

#### A WARNING

Failure to follow these warnings could cause SEVERE INJURY or DEATH

- PROPELLER INJURY. Avoid serious injury turn engine OFF while swimming and or using boarding ladders.
- VISION OBSTRUCTION. Do not operate boat while full canopy enclosures are installed. Your forward, aft and side vision is obstructed by the canopy enclosures.
- DO NOT STORE FUEL IN COMPARTMENTS. Proper ventilation has not been provided. Serious injury could result if ignored.
- FUEL SYSTEM IS UNDER PRESSURE. Release cap slowly to avoid injury. No smoking, vapors are combustable.
- AVOID SERIOUS INJURY OR DEATH from fire or explosion resulting from leaking fuel. Inspect system for leaks at least once a year.
- DO NOT OPERATE UNDERDECK LIGHTS when navigation lights are required.
- WHILE ANCHORED OR UNDER WAY stern light must be vertical. Monitor regularly - USCG Regulation.
- PASSENGERS SHOULD NOT RIDE IN BOW AND STERN FISHING SEATS WHEN **BOAT IS UNDERWAY!** 
  - Too much weight in the bow could cause the boat to nosedive.
  - Passengers in stern are in danger of falling overboard.
- SEAT PASSENGERS FROM REAR TO FRONT. Heavy bow loading may cause poor handling while underway.
- SUDDEN TURNS ABOVE 25 mph may cause loss of boat control, reduce speed before attempting a turn.
- SKI BAR IS NOT A TOWING DEVICE. Ski bar is for water skiing only. Use of ski bar with tube may cause personal injury and/or equipment damage.
  - Turn Engine straight before tilting engine up or down for the trailering position, or damage to the cowling may result.
- CARBON MONOXIDE (CO) CAN CAUSE BRAIN DAMAGE OR DEATH.
  - Engine and generator exhaust contains odorless and colorless carbon monoxide gas.
  - Signs of carbon monoxide poisoning include nausea, headache, dizziness, drowsiness, and lack of consciousness.
  - MOVE TO FRESH AIR If anyone shows signs of carbon monoxide poisoning.
  - See Owners's Manual for information regarding carbon monoxide poisoning.
- BOATER'S CHECKLIST. For maximum enjoyment and safety, check each of these items, BEFORE STARTING YOUR ENGINE:
  - DRAIN PLUG (Securely in place?)
  - LIFE-SAVING DEVICES (One for every person on board?)
  - STEERING SYSTEM (Working smoothly and properly?) - FUEL SYSTEM (Adequate fuel? Leaks? Fumes?)
  - BATTERY (Full charged? Cable terminals clean and Tight?)

  - ENGINE (In neutral?)
    CAPACITY PLATE (Are you overloaded or overpowered?)
    WEATHER CONDITIONS (Safe to go out?)

  - ELECTRICAL EQUIPMENT (Lights, horn, pump, etc?)
  - **EMERGENCY GEAR**

(Fire extinguisher, baller, paddle, anchor and line, signaling device, tool kit, etc?)



MANUALS



GD-353

#### **GODFREY MARINE**

MEETS U.S. EPA EVAP STANDARDS **USING CERTIFIED COMPONENTS** 

GD-122

# AWARNING

Do not store fuel or flammable liquids here. Ventilation has not been provided for explosive vapors.

GD-017

## **A WARNING**

Open flame appliances consume oxygen, and produce carbon monoxide. To avoid asphyxiation or injury or death from exposure to carbon monoxide, maintain open ventilation when using these appliances. Do not use this appliance for comfort heating.

GD-126

## **A** CAUTION

AVOID UNINTENDED ACCELERATION

KEEP HELM SEAT LOCKED IN THE FORWARD FACING POSITION WHEN ENGINE IS RUNNING

GD-324

## **♠WARNING**

AVOID SERIOUS INJURY OR DEATH



Class

- SEAT LOCATION NOT INTENDED FOR USE AT HIGHER SPEEDS
- DO NOT OCCUPY SEAT WHEN SPEED EXCEEDS 5 MPH.
- DISLODGED SEAT MAY STRIKE OCCUPANT OR CAUSE LOSS OF BOAT CONTROL
- SECURE UNOCCUPIED SEAT.

GD-111

# DANGER



on Monoxide (CO) can cause brain damage or death gine and generator exhaust contains odorless and lorless carbon monoxide gas..

Carbon monoxide will be around the back of the boat where engines or generators are running.

Move to fresh air if you feel nausea, headache, dizziness, or

GD-110-15E

#### A WARNING



Carbon Monoxide (CO) can cause brain damage or death. Engine and generator exhaust contains odorless and colorless carbon monoxide gas Signs of carbon monoxide poisoning include nausea, headache, dizziness, drowsiness, and lack of consciousness.

Get fresh air if anyone shows signs of carbon monoxide poisoning. See Owners's Manual for information regarding carbon monoxide poisoning

GD-110-14E



#### CAUTION

Avoid blow back when filling the fuel tank on the initial fill. Fill the tank SLOWLY for the first several gallons.

GD-110-10E

#### DO NOT SIT ON GATE

To open, lift here & swing in

GD-110-11E



GD-110-16E



GD-110-17E

#### **WARNING**

To avoid personal injury, do not use this as a grab handle.

GD-110-1E

#### **AWARNING**

Avoid personal injury. Stay inside deck rails (and gates) when boat is underway.

GD-110-2E

#### **A WARNING**

PASSENGERS SHOULD NOT RIDE IN BOW AND STERN FISHING SEATS WHEN BOAT IS UNDERWAY!

- Too much weight in the bow could cause the boat to nosedive!
- Passengers in stern are in danger of falling overboard.

GD-110-3E

#### **AWARNING**

#### SKI BAR IS NOT A TOWING DEVICE.

Ski bar is for water skiing only. Use of ski bar with tube may cause personal injury and/or equipment damage. Turn Engine straight before tilting engine up or down for the trailering position, or damage to the cowling may result.

GD-110-24E

#### **AWARNING**

FUEL SYSTEM UNDER PRESSURE Release cap slowly to avoid injury. No smoking, vapors are combustible.

GD-110-25E

## SAFETY STATEMENTS

There is no substitute for sound judgment and careful practices. Improper practices or carelessness can cause burns, cuts, mutilation, asphyxiation, other bodily injury or death. This information contains general safety precautions and guidelines that must be followed to reduce risk to personal safety. Special safety precautions are listed in specific procedures. Read and understand all of the safety precautions before operation or performing repairs or maintenance.



NOTE — This safety alert symbol appears with most safety statements. It means attention, become alert, your safety is involved! Please read and abide by the message that follows the safety alert symbol.

DANGER Indicates a hazardous situation that, if not avoided. will result in death or serious injury.

Indicates a hazardous situation that, if not avoided, could result in death or serious injury.

CAUTION Indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

NOTICE Indicates a situation that can cause damage to the boat and accessories and/or the environment, or cause the equipment to operate improperly.



### SAFETY PRECAUTIONS

DANGER The safety messages that follow have DANGER level hazards. These safety messages describe hazardous situations that, if not avoided, will result in death or serious injury.



Training Hazard: Do not permit anyone to launch, operate or retrieve the boat without proper training.

- Read and understand this Basic Boating and Safety Manual and all manufacturer-supplied information before operating or servicing the boat to ensure that you follow safe operating practices and maintenance procedures.
- Safety signs and labels are additional reminders for safe operating and maintenance techniques.
- See the boat dealer for additional training.



Exhaust Hazard: Carbon monoxide (CO) is a colorless and odorless gas produced by all engines, fuel-burning appliances and any material that contains carbon and is burned. Direct or prolonged exposure to carbon monoxide will cause brain damage or death.



Electrocution Hazard: Docks and other boats nearby can carry sources of electricity. Faulty wiring or the use of damaged electrical cords and other devices not approved as "shore or marine rated" can cause the surrounding water source to become energized from electricity leakage. Never enter the water or swim in a marina.

WARNING The safety messages that follow have WARNING level hazards. These safety messages describe hazardous situations that, if not avoided, could result in death or serious injury.



Fire/Explosion Hazard: Gasoline is extremely flammable and highly explosive under certain conditions.

- Compartments for fuel, flammable liquids or gases must be properly ventilated to prevent explosive vapors from accumulating. Most vapors are heavier than air. If not in a vapor-tight locker vented overboard, vapors will accumulate in the bilge, posing a fire and explosion hazard.
- Inspect fuel system for leaks at least once a year.



Fire/Explosion Hazard: Hydrogen gases produced by a lead-acid battery while it is charging, or the engine is running, can cause an explosion and/or a fire.

- Always wear personal protective equipment when working on or around batteries.
- Keep the area around the battery well-ventilated.
- Do not smoke or bring an open flame or any other form of ignition near a battery.
- Do not check for a dead battery by placing a metal object between the battery posts. Sparks could cause an explosion.
- Do not place your head directly above a battery when making or breaking electrical connections.
- Always charge the battery outside of the boat.
- Do not use a battery booster to start the engine.



Sever Hazard: Make sure nobody is near the propeller before starting the engine(s).

- Do not allow swimmers to approach or use the ladder when the engine is running.
- The operator should walk to the stern and check the water for people near the propeller, as people in the water may not always be noticeable from the helm.
- Turn off the engine(s) before allowing people to board or exit the boat. The propeller may continue rotating even when the engine is idling or in NEUTRAL.
- Show passengers the location of the propeller and teach them to keep their distance from it at all times, even when the propeller is not in motion.
- Show passengers the propeller warning labels around the boat and discuss propeller dangers.
- Be particularly alert when boating in high-traffic areas and never operate in swimming zones.
- Exercise caution when operating near boats that are towing skiers and tubers.
- Never allow passengers to sit in areas where they could fall overboard, including the bow, gunwale, transom, seat backs, or other locations.
- Carefully watch children aboard the boat at all times.

 Instruct passengers on the rules for using the swim platform, boarding ladders and seats. If possible, instruct them to stay seated at all times while the engine is running.



Man Overboard Hazard: Always remain seated in the boat manufacturer's designated seating arrangement, use handholds and never block the view of the boat operator while underway. The boat's bow, gunwale, transom platform and seat backs are not intended for use while underway.

- If someone falls overboard, slowly turn the boat around while keeping an eye on the victim. Ask a passenger to help monitor the victim. Always STOP THE ENGINE before rescuing a victim from the water.
- Never put the engine in REVERSE to retrieve a person from the water. Slowly circle back to the person again if necessary.



Entanglement Hazard: Rotating or moving parts can entangle or sever body parts.

- Do not wear jewelry, unbuttoned cuffs, ties or loose-fitting clothing.
- Tie long hair back when working near moving or rotating parts such as the flywheel or propeller shaft.
- Keep hands, feet and tools away from all moving parts.
- Keep all guards in place when the engine is operating.
- Use caution when working with ski or mooring lines so they do not become entangled with the propeller.



Exposure Hazard: Wear personal protective equipment, including appropriate clothing, gloves, work shoes, eye and hearing protection, as required by the current task.



Control Hazard: Do not operate the boat while you are under the influence of alcohol or drugs or if feeling ill. Federal laws prohibit operating a boat under the influence of alcohol or drugs. These laws are vigorously enforced.



Operation Hazard: Pontoon boats are designed for boating on sheltered inland waterways, tributaries, rivers, lakes and bays. Do not operate a pontoon boat in the Great Lakes or open sea. Weather conditions on large bodies of water can change rapidly, placing occupants in peril or causing physical damage to the boat. Improper operation could result in death or serious injury.

CAUTION The safety messages that follow have CAUTION level hazards. These safety messages describe hazardous situations that, if not avoided, could result in minor or moderate injury.



Slip/Trip Hazard: Keep the boat free of water, oil, mud and other foreign matter. Do not wax deck and swim platform surfaces. Remove anything that creates slippery areas around the boat.

NOTICE The safety messages that follow have NOTICE level hazards. These messages are used to indicate a situation that can cause damage to the boat and accessories and/or the environment, or cause the equipment to operate improperly.

- Unapproved modifications to the boat or systems may impair the boat's safety and performance characteristics and shorten the boat's life. Any alterations to the boat may void its warranty. Always consult the boat manufacturer before making modifications or adding equipment.
- ALWAYS be environmentally responsible. Follow the guidelines of the EPA or other governmental agencies for the proper disposal of hazardous materials such as engine oil and fuel. Collect all trash and dispose properly on shore. Keep our waters clean! Consult the local authorities or reclamation facility.



#### Carbon Monoxide (CO)

DANGER Exhaust Hazard: CO gas is colorless, odorless and extremely dangerous. All engines and fuel-burning appliances produce CO as exhaust. Direct and prolonged exposure to CO will cause brain damage or death. Always avoid exposing your passengers or yourself to CO.



Even with the best boat design and construction, plus the utmost care in inspection, operation and maintenance, hazardous levels of CO may still be present in accommodation areas under certain conditions. To reduce CO accumulation, always provide adequate ventilation in the boat interior by opening the deck hatches, windows


Do not confuse carbon monoxide poisoning with seasickness, intoxication or heat stress. If someone complains of irritated eyes, headache, nausea, weakness, dizziness or drowsiness, or you suspect carbon monoxide poisoning, immediately move the person to fresh air, investigate the cause and take corrective action. Seek medical attention if necessary.


Always use a CO detector in confined areas where there is a possibility of CO buildup, such as enclosed canvas, sleeping quarters, galleys and head compartments. Regularly check the condition of the CO detector for proper operation.

Make sure that all passengers know what the CO detector alarm sounds like. If the alarm sounds, shut down engines and generator, move passengers to fresh air for at least 10 minutes, reset the alarm and investigate the cause. Ventilate the space thoroughly before restarting engines and generator.


Test the carbon monoxide detector operation before each trip, at least once a week and after the boat has been in storage. Also have the CO detectors professionally tested at regular intervals. Most CO detectors are required to be replaced every 5 years - see the OEM manual.


# **Potential Causes of CO Poisoning While Underway**















KC-0300-B



# REQUIRED BOATING SAFETY EQUIPMENT AND REGULATIONS

U.S. Coast Guard Minimum Onboard Safety Equipment Required (Your boat may be equipped with one or more requirements by the manufacturer, but it is the boat owner's responsibility to have these items on board.)

	LESS THAN 16 FT (4.9 M)	CLASS 1: 16 TO LESS THAN 26 FT (4.9 TO LESS THAN 7.9 M)	CLASS 2: 26 TO LESS THAN 40 FT (7.9 TO LESS THAN 12.2 M)	CLASS 3: 40 TO 65 FT (12.2 TO 19.8 M)
LIFE JACKETS AND PERSONAL FLOTATION DEVICES (PFDs)	One U.S. Coast Guard- approved Type I, II, III or V wearable life jacket for each person on board	One U.S. Coast Guard-approved Type I, II, III or V wearable life jacket for each person on board and one throwable Type IV PFD device		
VISUAL DISTRESS SIGNALING DEVICES	One (1) electric distress light OR three (3) day and night combination red flares	One orange distress flag or one electric distress light OR three floating or handheld orange smoke signals and one electric distress light OR three day and night combination red flares, handheld, parachute or meteor type		
AUDIBLE SIGNALING DEVICES	A boat less than 39.4 ft (12 m) must have on board an efficient sound-producing device. (Example: hand or mouth whistle OR a compressed or powered air horn)		A boat 39.4 ft (12 m) but less than 65.6 ft (20 m) in length operating in inland waterways must carry a power whistle OR powered air horn AND a bell	
NAVIGATION LIGHTS	Regulations require that navigational lights be clearly lit and properly displayed at all times between sunset and sunrise and always when operating in reduced visibility while boating			

	LESS THAN 16 FT (4.9 M)	CLASS 1: 16 TO LESS THAN 26 FT (4.9 TO LESS THAN 7.9 M)	CLASS 2: 26 TO LESS THAN 40 FT (7.9 TO LESS THAN 12.2 M)	CLASS 3: 40 TO 65 FT (12.2 TO 19.8 M)
FIRE EXTINGUISHERS	powered Has closed where ports can be store Has double construction areas where can be opee Has an end space Has compar flammable, or explosive stored	ed)  Its any one or lowing boat must //Pe USCG- guisher on  erndrive engine compartments able fuel tanks red bottom	One B-II OR two B-I type (USCG- approved) (A fixed extinguishing system is equal to one B-I.)	One B-II AND one B-I OR three B-I type (USCG-approved) (A fixed extinguishing system is equal to one B-I OR two B-II.)
EMERCENCY	Boat is 26 f more in len	gth	Om) anarating in I	- devel weters
EMERGENCY ENGINE STOP SWITCH	Powered boats less than 26' (7.9 m) operating in Federal waters must be equipped with an engine stop switch and operator interface.			



### FIRE EXTINGUISHER

USCG-approved fire extinguishers are required on all Class I, II and III boats. Mount all handheld fire extinguishers in readily accessible areas away from the engine compartment and other combustible devices. All passengers must know the location and operating procedure of each extinguisher. Follow the manufacturer's instructions for proper use and operation of the fire extinguisher.



KC-0009C-B

All fire extinguishers used on marine boats must be classified to extinguish type B fires (gasoline, oil or grease). The size and number of required fire extinguishers depend on the size of the boat. The two type B fire extinguishers commonly used are B-I and B-II. Type B fire extinguishers are classified by the different extinguishing compound amounts used in each.

Check the fire extinguisher condition and pressure gauge regularly, if not before every trip, to ensure that the fire extinguisher is in good operating condition and is fully charged. If the fire extinguisher is damaged or not properly pressurized, replace it.

See the U.S. Coast Guard Minimum Onboard Personal Safety Equipment Required section of this manual for specific onboard requirements.

## ENGINE EMERGENCY STOP SWITCH AND LANYARD

The engine emergency stop switch is an extremely important safety device. Use the engine emergency stop switch when operating the boat's engine. This safety device prevents the boat from becoming a runaway if the operator is accidentally thrown from the seat or away from the helm. The USCG recommends and many states require the use of the emergency stop switch by law. Check with local and state authorities about usage requirements to avoid potential fines.



Starting April 1, 2021, powered boats less than 26' (7.9 m) operating in Federal waters must be equipped with an engine stop switch and operator interface.

- Tiller-steered models may have a switch mounted on the tiller handle with a wrist lanyard.
- Side-mount controls may have a switch on the control box with a "clip-on" lanyard.
- Larger boats may have a helm-mounted switch with a "clip-on" lanyard.

Some boats may have a wireless switch with a FOB attached to the operator. Consider having an extra lanyard readily available on board since the system cannot be overridden without the lanyard that is on the person who is now overboard.

WARNING Control Hazard: Never remove or modify the engine emergency stop switch and/or lanyard.

- Always check the switch for proper operation. With the engine running in neutral, pull the lanyard. If the engine does not stop, have the switch repaired before continuing to operate the boat. Never operate the boat if the engine emergency stop switch does not work.
- Avoid accidentally pulling the cord lanyard during normal operation. Loss of engine power means loss of most steering control. Also, without engine power, the boat could slow rapidly. This could cause people and objects in the boat to be thrown forward.

#### LIFE JACKETS

Boaters enjoy the feel of sun and spray, so it's tempting to boat without wearing a life jacket, especially on nice days. However, the failure to wear life jackets is by far the number one cause of boating fatalities.

Modern life jackets are available in a wide variety of shapes, colors, sizes and technologies. Many are thin and flexible. Some are built right into fishing vests or hunter coats. Others are inflatable and as compact as a scarf or fanny pack until they hit water and automatically fill with air. Ensure all passengers on board understand where the life jackets are located and how to put them on and use them.

There's no excuse for not wearing a life jacket on the water. Boat dealers or marine stores are the best sources for quidance when selecting this most important piece of safety equipment.

## Things to Know about Life Jackets:

- Certain life jackets are designed to keep the head above water and help you remain in a position that permits proper breathing.
- To meet USCG requirements, a boat must have a USCG-approved life jacket for each person aboard. Boats 16 feet and over must have at least one Type IV throwable device as well.
- All states have regulations regarding children wearing life jackets.



- Adult-sized life jackets will not work for children. Special life jackets for children are available. To work correctly, a life jacket must be worn, fit snugly and not allow the child's chin or ears to slip through.
- Life jackets can be equipped with whistles, strobe lights, handheld VHF radios and personal locator beacons.
- Life jackets are recommended for open water.
- Test life jackets for wear and buoyancy at least once each year. Discard waterlogged, faded or leaky jackets.
- Properly stow life jackets but make them easily accessible.
- A life jacket, especially a snug-fitting flotation coat or deck-suit style jacket, can help people survive in cold water.

#### Life Jackets Must Be:

- USCG-approved
- In good and serviceable condition
- Appropriately sized for the intended user
- The best life jacket is the one you will wear

### Accessibility

- Wearable life jackets must be readily accessible.
- Boaters must be able to locate and put them on in a reasonable amount of time in an emergency.
- They should not be stowed in plastic bags, in locked or closed compartments or have other gear stowed on top of them.
- Throwable devices must be immediately available for use in emergency situations.
- Though not required, a life jacket should be worn at all times when the boat is underway. A life jacket can save a boater's life, but only if the boater wears it. Set the example and wear it whenever near the water.

### **Child Life Jacket Requirements**

No person may operate a recreational boat underway with any child under 13 years old aboard unless each such child is either: (1) Wearing an appropriate PFD approved by the Coast Guard; or (2) Below decks or in an enclosed cabin.

Some states require that children wear life jackets at all times; check with the state boating safety authorities.

- Applies to children of specific ages
- Applies to certain sizes of boats
- Applies to specific boating operations

Child life jacket approvals are based on the child's weight. Check the "user weight" on the label, or the approval statement that will read something like "Approved for use on recreational boats and uninspected commercial boats not carrying passengers for hire, by persons weighing XX lbs." They can be marked "less than 30," "30 to 50," "less than 50," or "50 to 90."

Since children grow quickly, many boat launches now feature free use of children's life jackets in several different weight categories.

### Life Jacket Requirements for Certain Boating Activities Under State Laws

The USCG recommends, and many states require, wearing USCG-approved life iackets:

- For waterskiing and other towed/surf activities, use a life jacket designed for waterskiing. It is illegal in many states to participate in towed water sports without a USCG-approved life jacket. Be aware that some specialized water sports vests are NOT USCG-approved and should be worn in addition to a USCG-approved life jacket.
- While operating personal watercraft (PWC) use a life jacket marked for PWC or waterskiing use.

Check with the state boating safety authorities. Other rules may apply if boating in an area under the jurisdiction of the Army Corps of Engineers or a federal, state or local park authority. Special local rules are usually posted at the boat launch.

## Type I Life Jacket

This life jacket is designed so that the person wearing it turns to a face-up position when conscious or unconscious. Type I life jackets are the most buoyant and are effective on all waters, especially when rescue is delayed or flotation time is extended



KC-0003C-A

## Type II Life Jacket

This life jacket is recommended for use in calm water near shore on most inland waters where quick rescue is likely. A Type II life jacket is similar to a Type I life jacket, but it is not as buoyant or effective in turning the wearer to a face-up position.



KC-0006C-A



### Type III Life Jacket

This life jacket is designed for personal buoyancy when the wearer is alert and conscious. Type III life jackets require users to turn themselves to a face-up position. Type III life jackets are recommended in most inland water applications where quick rescue is likely or when used in the presence of other people.



#### Type IV Personal Flotation Device

These PFDs are designed to be thrown to a person in the water who can grab and hold it while being rescued. Never wear a Type IV PFD.



## Type V Life Jacket

This life jacket is designed for special activities and may be worn instead of a Type I, II or III life jacket if used in accordance with the approval conditions on the label. If a Type V life jacket is part of the minimum onboard life jacket requirements and if it has a label that indicates "required to be worn," it must be worn at all times. Otherwise one



KC-0007C-A

additional Type I, II or III life jacket must be on board to satisfy the minimum life jacket requirements. Some Type V life jackets provide increased protection against hypothermia.

# **VISUAL DISTRESS SIGNALING (VDS) DEVICES**


There are a variety of VDS devices for day, night, or day and night use. Pyrotechnic devices can be dangerous if used improperly; read the instructions before using. Pyrotechnic devices expire and must be replaced every few years, as stamped on the unit. Be sure to properly dispose of old pyrotechnics.

Distress lights and strobes are equipped with batteries that must be replaced every few years, as stamped on the unit.

Boats less than 16 feet (4.9 meters) must have USCG-approved visual distress signals (VDS) on board when operating between sunrise and sunset in coastal waters, including ocean bays, gulfs and sounds, as well as the Great Lakes, seas, bays and river mouths that are 2 or more miles wide and only to the point proceeding inland where the water narrows to less than 2 miles. Visit the U.S. Coast Guard website for additional information on specific VDS requirements for the boat.

Ensure all passengers on board understand how to operate all VDS. Keep VDS in a readily accessible area and within immediate reach at all times when boating.

#### VISUAL DISTRESS SIGNALS

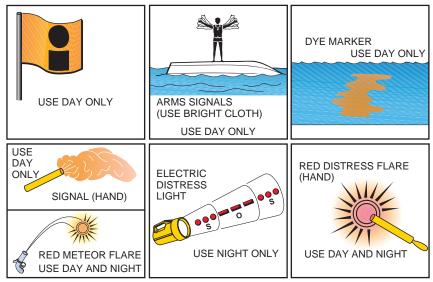

KC-0008C-B

Regulations prohibit using pyrotechnic VDS or any VDS in non-emergency situations

#### VDS must be:

- **USCG-approved**
- In proper operating condition
- Safely stowed and readily available
- Within the clearly marked expiration date stamp on the device (where applicable)

Types of VDS vary by emergency situation. VDS are classified as either pyrotechnic or non-pyrotechnic.

NOTE — Some pyrotechnics may be restricted on certain bodies of water. Check with local authorities, or visit the National Association of State Boating Law Administrators (NASBLA) website: http://www.nasbla.org or the U.S. Coast Guard website: http://www.uscg.mil for additional information.

See the U.S. Coast Guard Minimum Onboard Personal Safety Equipment Required section of this manual for specific onboard requirements.



### AUDIBLE SIGNALING DEVICES

Audible (sound) signals are required to be on board all boats to alert other boats of your presence or intentions. A boat less than 39.4 feet (12 meters) must always have an efficient sound-producing device on board (Example: hand or mouth whistle, or a compressed or powered air horn).

A boat at least 39.4 feet (12 meters) but less than 65.6 feet (20 meters) operating in inland waterways must always have a power whistle or powered air horn and a bell on board.

All devices must be acceptable for use in marine environments, audible for 1/2 nautical mile and maintain a continuous four- to six-second sound duration. The diameter of the bell's mouth must be a minimum of 7.9 inches (20.0 centimeters).

Ensure all passengers understand how to operate all audible distress signaling devices on board. Keep these devices in a readily accessible area and within immediate reach at all times when boating.

See the U.S. Coast Guard Minimum Onboard Personal Safety Equipment Required section of this manual for specific onboard requirements and see the Navigational Lights and Night Operation section of this manual for usage information.

### NAVIGATIONAL LIGHTS

Navigational lights are intended to alert other boats to your presence and course and their use is essential to boating safety and the prevention of collisions. Knowledge of navigation lights is necessary for the boat operator. Regulations require that navigational lights be clearly lit and properly displayed at all times between sunset and sunrise, and always when operating in reduced visibility. The placement, shape and visibility requirements of navigational lights vary depending on boat size, type, activity and the body of water. Do not allow passengers, gear or stowed items to block navigation lights. Check with local authorities, or visit the NASBLA or U.S. Coast Guard website for additional information.

If the boat is equipped with bow and/or stern pole style plug-in lights, be sure to orient the pole properly in the receptacle and lock in place. The white light is for the stern and the combination red/green light is for the bow, center. If using separate bow lights, the red light is for the front left (port), and the green light is for the front right (starboard). After inserting, check for proper operation of the lights.

For additional information, see the Navigational Lights and Night Operation section of this manual.

### Show Lighting

The navigational lighting required by the USCG from sunset to sunrise and in inclement weather is extremely important to boat navigation. The lighting rules are not only designed to indicate direction and right-of-way, but are also designed to prevent night blindness and confusion with navigational aid, emergency and shorebased lights.

The arrival of inexpensive LED lights and red/green/blue (RGB) controllers suitable for "show" use has become extremely popular with boaters. Installing supplemental lighting for "show" can be very dangerous, confusing and distracting to other boaters, and may be illegal. The operator is responsible for complying with local laws and must be familiar with local marine lighting regulations that are constantly evolving before use. Keep these points in mind for show lighting:

- Do Not install lighting outside of the boat above the waterline.
- Do Not install lighting inside the boat above the gunnels where the light source can be seen directly from outside the boat.
- Use caution when changing RGB light color, as some light colors may not be compliant with certain local ordinances; blue lighting is typically reserved for law enforcement use only.
- Be sure to switch off show lighting and lighted accessories such as speakers (not navigation lights) when underway. Most states allow the use of underwater lighting while underway.
- Use only factory-installed, low-intensity courtesy lighting or "mood" lighting when underway.

Never use onboard accessory equipment containing LED

liahtina when underwav.



# **RECOMMENDED SAFETY EQUIPMENT**

Carry and know how to use the following equipment in addition to the required equipment on board at all times as an extra safety precaution:



Anchor and line with minimum 75 feet (23 meters) of line	GPS Global Positioning Device		
Auxiliary starting battery	Insect repellent		
Binoculars	Local charts and compass		
Boat hook	Mirror, whistle and strobe light		
Cellular phone with waterproof case and lanyard	Mooring lines		
Compass	Navigational and interior light bulbs		
Dock fenders	Oar/paddles		
Dry bag	Propeller, nut and washer		
Duct and electrical tape	Radio		
Electrical wire	Sharp folding pocket knife		
Emergency food and water	Solar USB charger and cable		
Emergency Position Indicating Radio Beacon (EPIRB)	Spark plugs		
Engine lubricant	Sunglasses and sun block		
Extra drain plug	Thermal clothing		
Extra transom plug	Throwable life ring		
First aid kit and manual	Tool kit including propeller replacement tools		
Flashlight and radio batteries	Tow line		
Foul weather gear/clothing	VHF-FM/AM with weather band radio		
Fuses	Waterproof flashlight		

# **VERY HIGH FREQUENCY (VHF) RADIO**

The VHF radio is used to communicate with others on and off the water. VHF channel 16 (156.8 MHz) is designated as the international distress, safety and calling channel and is used to summon rescue services such as the USCG and to make initial contact with ports, marinas, bridges, locks and other boaters in the area. Use a VHF radio. The best way to clearly understand and deal with crossing, overtaking and meeting situations in open water is to communicate with the other boat on the radio.

The responder may then ask the caller for other information to help the caller. It is important to remain calm, speak slowly and be succinct. Short and concise communications are best no matter what the situation is.

Since VHF radios have limited distance line-of-sight (to the horizon) capabilities, it is important for all boaters receiving the distress call to attempt to render assistance until the rescue authorities arrive. The very nature of open water escalates the importance of any distress call. Boaters should always monitor (listening watch) channel 16 but never use it for casual communications. Assist others in distress if possible or monitor the situation until help has arrived.

In other communications, call the other party on channel 16 using your call sign. Bridges and locks will instruct boaters on what to do. Harbors, marinas and other boaters in the area will inform boaters to switch to a particular channel. Most VHF radios transmit in "simplex," where communication can only take place in one direction at a time. For this reason, standard etiquette is to never interrupt a transmission and to wait 15-30 seconds before making a transmission. There are many channel options available for both commercial and non-commercial use.

NOTICE The USCG is the lead agency for maritime search and rescue (SAR) in U.S. waters, but that mission is compromised every time the service receives a hoax distress call. Making a false distress call is a violation of federal law (14 U.S. Code § 88) and may result in up to six years in prison, a \$250,000 criminal fine, a \$5,000 civil fine, and reimbursing the U.S. Coast Guard for the cost of performing the search.

Using a VHF radio in foreign waters with a U.S.-registered boat may require a federal Ship Station License by law or treaty. Traveling to a foreign port (for example, Canada, Bahamas, British Virgin Islands and Mexico) requires a Ship Station License as well as a restricted radiotelephone operator permit (RR). Go to www.fcc.gov/ship-radio-stations for more information.

Read the VHF manufacturer's information on the special features and use of the radio.



# PERSONAL LOCATION BEACON (PLB)

While an EPIRB is registered to the vessel, a PLB is registered to the user. Similar to an EPIRB. PLBs must be registered in the National Oceanic and Atmospheric Administration (NOAA) Search And Rescue Satellite Aided Tracking (SARSAT) database with personal information that is required to be updated every two years and reported if the unit is sold. Handheld waterproof marine PLBs also have longlasting batteries stamped with an expiration date. Since the PLB identifies the user, it can also be used on land when hiking or for other remote activities.

## SITUATIONAL AWARENESS

A good captain knows that it is important to continuously observe the surroundings and traffic when operating. Good captains also use their eyes to track things around the boat and their ears to hear engine and mechanical issues. Technology should only be used to supplement the conditions and events happening around you and is not meant to replace situational awareness. While available technology and automation help captains see the big picture, the captain is responsible for knowing what is going on around the boat. If possible, post a lookout or lookouts when underway.

Do not get immersed in the boat's technology or blindly follow GPS routes without keeping watch or consulting depth charts. Study the manuals for each piece of equipment and monitor the information for the task at hand, be it depth, traffic, infrared camera, engine data, course or weather.

## DRIVING DEFENSIVELY

Sharing boats is becoming more popular in the boating culture. Boating has seen an influx of new, inexperienced and untrained boaters due to peer-to-peer boatsharing apps and boat clubs. It is increasingly probable that someone on the water "tried" boating because it looked fun. Many of the boat owners sharing their boats do little more than cover safety equipment, starting, stopping and docking instructions. With shares lasting half a day or less, there is little time for much training, let alone covering the rules of the road and navigation.

Boat-sharing is in a legal gray area and is not clearly defined in maritime law. Enforcement of existing rules is nearly impossible and almost always after-the-fact. Operators should assume that the other boat operator is untrained and should drive defensively. Boaters choosing to share their boat should discuss the issue with their insurance agent first and consider a mandatory captain requirement. Use only reputable sharing services and frequently check for new or updated USCG and state requirements.

## SMALL BOATS AND SWIMMERS

Canoes, kayaks, paddleboards and swimming inflatables have become impulse purchases for many, as they appear fun to use and prices have fallen. Most of these operators are new to the sport and have no training on rules of the road or navigation. This is further complicated by the low, thin profile that makes these small boats difficult to see, especially in the sun, glare and rough water. Operators should keep a close lookout for these boats, swimmers and other boats. Assume that the person is untrained and give them plenty of space.

## KNOWING THE BOAT

Be thoroughly familiar with onboard systems and other equipment, especially the critical systems and equipment such as throttle and shift controls, steering, backup steering, running lights, fuel filters, sea strainers, and all emergency safety equipment. Should an emergency arise, the captain will need to act safely and efficiently.

## SPECIAL NEEDS PASSENGERS

Keep these special precautions in mind when enjoying a day on the water with passengers who have special needs.

#### **Toddlers**

- Never leave children in the boat without adult supervision.
- Must weigh at least 18 pounds (8.2 kilograms), since that is the smallest children's life jacket approved by the USCG. Life jacket must be worn whenever near the water.
- Any device the child is placed in must have flotation.
- Child-proof the boat just like a home. Be sure all gates and compartments are closed and latched.
- Keep a close watch on the child's reaction to speed and conditions and react accordingly.
- Use a higher than normal SPF waterproof sunscreen and re-apply more often than usual.
- Find a safe area to put the child down without risk of going overboard. Allow the child to get accustomed to the surroundings before launching/ leaving.
- Keep trips short, but let them have some fun if possible.



#### **Pregnant Women**

- Go boating during the day and in calm seas.
- Avoid sharp turns and slow down for large wakes.
- Drink more water than usual to stay hydrated.
- It is a good idea to stay seated in the accommodation deck area while underway.
- Stay close to the home port in the third trimester.

#### People with Handicaps and Elderly People

Depending on the disability, there are many marine-specialized options available to make boats safer and friendlier. Researching on the internet for your specific needs is the best way to start.

#### Pets

- Not all pets can swim; consider a life jacket.
- If playing fetch in the water, get a pet-friendly boarding ramp to make reboarding easier.
- Provide a shaded area and plenty of fresh drinking water.
- Consider foot protection for hot sand and boat surfaces.
- Allow the pet to get accustomed to the surroundings before launching/ leaving. Keep the first outing short to allow the pet to get used to the boating environment.

# **CRUISING LIMITATIONS**

- Scan constantly for people, objects and other watercraft. Be alert for conditions that limit your visibility or block your vision of others.
- Operate defensively at safe speeds and keep a safe distance from people, objects and other watercraft.
- Do not follow directly behind other watercraft.
- Do not go near others to spray or splash them with water.
- Avoid sharp turns or other maneuvers that make it hard for others to avoid you or understand where you are going.
- Avoid areas with submerged objects or shallow water.
- Operate within your limits and avoid aggressive maneuvers to reduce the risk of loss of control, ejection and collision.
- This is a sophisticated boat—not a toy. Sharp turns or jumping waves or wakes can increase the risk of back/spinal injury (paralysis), facial injuries, broken legs, ankles and other bones. Do not jump waves or wakes.

- Do not operate the boat in rough water, bad weather or when visibility is poor; this may lead to an accident causing injury or death. Be alert to the possibility of bad weather. Take note of weather forecasts and the prevailing weather conditions before setting out in the boat.
- Leave a "float plan" with a responsible person on shore. Tell where you plan to go and when you plan to arrive, and provide a description of your boat. Advise this person if your plans change and also when you arrive to prevent false alarms. Refer to Float Plan in this manual for additional information

## HAZARD INFORMATION

- Never start the engine or let it run for any length of time in an enclosed area. Exhaust fumes contain carbon monoxide, a colorless, odorless gas that may cause death within a short time. Always operate the boat in an open area.
- Do not use the reverse function to slow down or stop the boat, as it could cause you to lose control, be ejected or impact the steering wheel or other parts of the boat. This could increase the risk of serious injury. It could also damage the shift mechanism.
- Reverse can be used to slow down or stop during slow speed maneuvering, such as when docking. Once the engine is idling, shift to REVERSE and gradually increase engine speed. Make sure that there are no obstacles or people behind you before shifting into REVERSE.
- Stop the engine and remove the clip from the engine stop switch before removing any debris or weeds that may have collected around the propeller.

## WATER SPORTS

WARNING Control Hazard: It is unlawful to participate in water sports while under the influence of alcohol or other drugs.

Some boats are not designed or recommended to be used for water sports. For recreational boats, water sports include any activity performed in the water such as waterskiing, kneeboarding, wakeboarding, wakesurfing, hydrofoiling, swimming, diving, snorkeling or gliding using a device that may be pulled by a boat. Boats equipped with a ski pylon, tower or hard top tow point, or a transom-mounted ski tow eye can be used for most water sports in accordance with the capacity limits listed on the label

Inflatables, also known as tubes, have some unique safety considerations and require the use of both stern eye strong points in combination with a proper tube harness and tow rope; see Inflatables/Tube Tips in this section for more information.



Parasails and kites require specialized equipment and training and should never be used with a recreational boat.

Check with local and state authorities or water sports clubs and affiliations for additional information.

## PLATFORM DRAGGING

These dangerous and even fatal activities can lead to any or all of the following, as well as other dangers not listed here:

- Carbon monoxide poisoning
- Severe injury from a rotating propeller
- Drowning or entrapment under the water

NOTICE It is UNLAWFUL to be on or holding on to the boarding platform, swim deck, swim step, swim ladder or any portion of the exterior of the transom at any time while the boat is running or underway in any direction and at any speed.

WARNING Personal Injury Hazard: Body, teak or platform dragging is extremely dangerous and can be fatal. Never hold on to the transom of a boat while in the water when the boat is running or underway.

- Do not use the boarding platform or ladder for any purpose other than boarding the boat or entering the water.
- Do not use the boarding platform or ladder while the engine is running.
- Do not swim under the boarding platform when the engine is running.

## WATER SPORTS GUIDELINES

#### **Boat Operator, Occupants and Participants**


The following water sports guidelines only cover the general conditions that frequently arise. The participants must respond to the constantly changing weather and the conditions of the sea by using reasonable and safe judgment in light of the circumstances.

- Always ensure that all water sports participants and occupants of the boat, especially the operator, are fully aware at all times of the participants' condition and location in the water, as well as the surrounding environment.
- Make safety the primary concern of all involved during the activity. Only allow safe and capable participants to engage in the activity.
- The boat operator and water sports participants must always know their limitations in the activity and never exceed them.
- Never perform water sports in or near:
  - Congested areas
  - Restricted areas
  - Navigation or other waterway markers
  - Other boats
  - Other water sports participants
  - Obstructions in the water
  - Shorelines
  - Shallow water
  - Hazardous weather conditions
  - Hazardous waterways, rapid moving water, dams, spillways, etc.
  - Areas or times of restricted visibility
  - Hours between sunset and sunrise
  - Locations too far from shore that could hinder immediate rescue or emergency help if needed
- Always engage in water sports activities in safe waterways only.
- Always attach the water sports tow rope to approved attachment points on the boat.
- Never jump from a boat that is moving at any speed, and do not enter or exit the water when the engine is running.
- Never use different length ropes simultaneously for water sports activities.



- Always make sure that participants know and use approved skiing hand signals and common skiing courtesy.
- Before starting, always agree to speed and communication hand signals between the boat operator, spotter/observer and participants.
- Before starting, always inspect the water sports equipment and tow eye, tow point and tow line for safe operating condition, or damage that may lead to failure.

### **Know Water Sports Hand Signals**

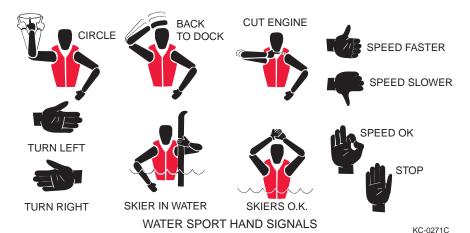

## **Boat Operator Specific Guidelines**

The following guidelines are for the boat operator while a participant is in the water.

- Always have a "spotter" (designated observer) other than the boat operator on board to ensure the safety of the participants in the water and provide communication to and from the boat operator and the participants.
- Always turn the engine off from a safe distance when approaching participants in the water and allow them to reach the boat. Never run the engine near a person in the water.
- Never operate the boat in reverse to retrieve anyone in the water.
- Always return immediately to a fallen water sports participant. Always approach the participant on the operator's side while keeping the participant in view from a direction opposite the wind or seas.

- Never drive directly at a person in the water or directly behind another
- Always maintain a safe distance from people and objects in and on the water.
- Always look in the direction you plan to turn before turning the boat to pick up a fallen skier.
- Never retrieve any object from the water while the engine is running.
- Always keep the skier in view when the skier is entering or exiting the boat.
- Always watch the skier as the line begins to tighten (in case the rope wraps around ski or skier).
- Always look ahead before starting.
- Always start from a safe place with good forward and peripheral visibility.
- Always check direction of steering before starting, ensuring that the boat steers straight.
- Always be aware of what is occurring in front of the boat, and of a participant's condition.
- Always display a "skier down" flag whenever a skier is in the water and not skiing.
- Always follow the approved towing pattern for the waterway in which you are operating.

#### Additional Guidelines for Participants in the Water

The following guidelines are for the water sports participant.

- Never participate in water sports if you cannot swim.
- Always wear a bright-colored USCG-approved activity life jacket at all times. Wear suitable protective clothing or gear and/or a wet suit to prevent impact injuries, abrasions and hypothermia.
- Never approach or enter the boat if the engine is running.
- Always avoid the boat's propeller. Even when the propeller is not rotating, its sharp edges can cause serious injury.
- Never put any part of your body through the handle of the ski line or wrap the line around any part of your body.
- Never enter the water from a boat that is running or moving at any speed.
- Always indicate that you are clear of the boat prior to the operator starting the boat or putting the boat into gear and tightening the rope.




#### Inflatables/Tube Tips

Today's market offers various types, shapes and sizes of towed inflatables (known as "tubes" or "inflatables"). A person can ride "in" or "on" (depending on the style) these inflatables while out on the water. Regardless of the type, they all produce tremendous stress on the tow point and rope, far greater than devices like water skis, kneeboards or wakeboards. When using tubes, keep the following points in mind:


- Follow the general water sports safety guidelines in this section for operating the engine, using life jackets, using a spotter, guarding against rope entanglement, reviewing equipment condition before use, understanding rider skill levels, and abiding by regulations for distances to other boats, docks and shorelines.
- Do Not exceed a towing speed greater than 8 mph (11km/h) for small children, 15 mph (24 km/h) for children up to 18 years old, or 20 mph (32 km/h) for adults.
- Do Not attempt to intentionally cause a tube rider to fall and use extreme caution with multiple riders to prevent slamming riders together.
- Do Not use tow ropes shorter than 50 ft (15 m), or longer than 65 ft (20 m).
   Be sure the tow rope and tube is rated for the combined weight of all riders and uses the proper attachment points. A braided tow rope offers a degree of stretch to minimize shock to the rider.
- Do Not use ski tow pylons, hard top, tower or ski tow eye points for tubes.
  Use both port and starboard stern eye strong points with a tube tow
  harness to attach the tube tow rope. Add a floating ball to the tow rope to
  keep the rope on top of the water and improve performance. If you do a lot
  of tubing, invest in a transom-mounted bracket made specifically for
  towing tubes (see your dealer).
- Check the tube air pressure often and keep at the manufacturer's recommended level as listed on the device. Pressure levels can change rapidly from sun and shade; too low and it creates additional drag, too high and it may cause tube failure.
- Tow only one tube at a time.
- Read and understand the user's manual for the tube; instruct children on the Do's and Don'ts.

Personal Injury/Equipment Damage Hazard: Ski tow pylons/tower/hard top/ski eye tow points are not designed for use with tubes. The added stress of the tube may cause a dangerous recoil or damage the tow point. Damage to the pylons/tower/hard top/ski eye tow points is not covered by the boat or equipment manufacturer's warranty. If towing tubes/inflatables, use both stern eye strong points with a tube tow harness to attach the tube tow rope. Consult the boat manufacturer for stern eye tow limits.

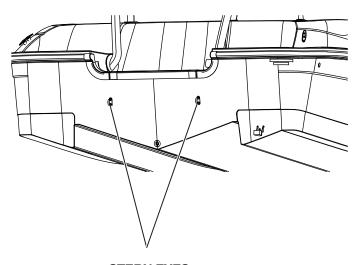





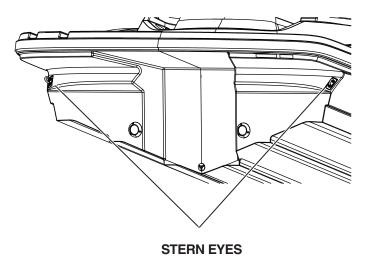

KCB-0109



### Using the Platform/Boarding Ladder

WARNING Personal Injury Hazard: Always turn the engine off whenever anyone is in the water near the boat.

To board, carefully deploy and use the boarding ladder if available. You may also pull yourself onto the boarding platform to enter the cockpit of the boat. Boats equipped with a boarding platform have a few extra precautions to be aware of:

- NEVER allow anyone on the boarding platform or in the water near the platform while the engine is running.
- NEVER attempt to surf on or off the platform while the engine is running.
- NEVER "platform drag" or touch the boarding platform from the water while the engine is running.
- NEVER exceed the weight capacity of the boarding platform. All boarding platforms have weight limits. If there is no capacity decal, ask the dealer.
- Boarding platforms may be wet and slippery. Advise passengers to use caution and any available handholds when using the platform. Never apply wax to the working deck portion of the platform.
- If the boarding platform is equipped with a ladder, be sure the ladder is fully retracted and secured before operating the boat.
- If the boarding platform is removable, be sure it is properly secured before operating the boat.

## **Designated Occupant Seating**

It is important to use the designated occupant positions (DOP) when underway, if applicable. You must also understand that even though the capacity label identifies the number of passengers for your model, the actual number of passengers is determined by weight. Your boat model may have 10 DOP seats and a capacity label that says 8 persons or 1500 pounds. This means that you may have a maximum of 10 people as long as the sum total weight of all the people and gear does not exceed 1500 pounds. Likewise, it may be possible that the 1500-pound limit could be exceeded with only 7 people or less.

For more information on capacity, see Section 1, Hull Identification, Capacity and Safety Plates. For more information on seating, see Section 2, Safety. For more information on the proper distribution of passengers on the boat, see Section 7, Boat Loading.

### Water Sports Safety

#### IMPORTANT

The following water sports safety warnings and practices represent some (but not all) common risks encountered by users. Always use common sense and aood iudament.

Before skiers/riders get in the water: Waterskiing or riding instruction is recommended in advance. Instruction will teach general safety guidelines and proper waterskiing or riding techniques, which may reduce their risk of injury. For more information on waterskiing or riding schools, contact the dealer, association or local waterskiing club.

Inspect all equipment prior to each use. Check bindings, fins, tube, attachment, tow rope and flotation device. Do not use if damaged.

Special boat considerations: A knowledgeable and responsible driver along with a separate observer is the most important safety device on any boat.

- Some states have specific regulations for allowable propulsion systems that can be used for tow sports, especially wake surfing. It is the operator's responsibility to know the applicable regulations.
- Never exceed the passenger or weight limitations of the boat.
- Never allow passengers to hang outside the boat or towed device or sit on the gunwales or anywhere outside of the normal seating area.
- Never allow water to overflow the bow or gunwales of the boat.
- Uneven weight distribution or additional weight may affect the handling of the boat.

Tow ropes: Tow ropes come in different lengths and strengths for different activities. Make sure any rope used is suited for that activity and that it is in good condition.

- Never use a rope that is frayed, knotted, unraveling or discolored from use or being left in the sun. If a rope breaks while in use, it can recoil at the skier/rider being towed or into the boat where it might strike passengers. Replace tow ropes with any sign of damage.
- Never use a tow rope with elastic or bungee material to pull skiers or riders.
- Rope should be attached to the boat in an approved fashion with hardware designed for towing. Refer to the boat manual for instructions on proper tow rope attachment.
- Always keep people and tow ropes away from the propeller, even when idling.



- If a tow rope should become entangled in a propeller, shut off the engine, remove the key and secure it in a safe location before retrieving the rope.
- Tow ropes should be neatly stowed in the boat when not in use.

**Preparing to ski or ride:** Always have a person other than the driver act as an observer to look out for the skier/rider.

- Be sure the driver is aware of the experience and ability level of the skier/ rider.
- The driver, observer and skier/rider need to agree on hand signals before skiing or riding. Signals should include READY, STOP, SPEED UP and SI OW DOWN.
- Start the engine only after making sure that no one in the water is near the propeller.
- Turn off the engine when people are getting into or out of the boat, or in the water near the boat.
- Always make sure the tow rope is not wrapped around anyone's hands, arms, legs or other parts of the body.
- Start the boat and move slowly to remove slack until the tow rope is tight.
- When the skier/rider signals READY "hit it" and there is no traffic ahead, take off in a straight line. Adjust the speed according to the signals given by the skier/rider.

**Skiing or riding:** The boat and skier/rider should always maintain a sufficient distance from obstacles so a skier/rider falling or coasting and/or boat will not encounter any obstacle.

- Do not use in shallow water or near shore, docks, pilings, swimmers, other boat or any other obstacles.
- Use only on water.
- Never attempt land or dock starts or stops. This will increase the risk of injury or death.
- The faster the skier/rider skis or rides, the greater their risk of injury. The skier/rider should be towed at an appropriate speed for his or her ability level.
- Never make sharp turns that may cause a slingshot effect on the skier/ rider's speed.

Fallen skier or rider: Falling during water sports is commonplace and injuries can occur from a variety of causes.

- If the skier/rider does not immediately indicate that they are "OK," assume that they need assistance.
- Circle a fallen skier/rider slowly to return the tow rope handle or, pick up the fallen skier/rider.
- Turn off the engine when near a fallen skier/rider.



KC-6017

- Always keep the fallen skier/rider in view and on the driver's side of the boat.
- Display a red or orange "skier down" flag to alert other boats that a skier/ rider is down if required by the state in which you are operating.

### Water Sports and Towing Safety

Boat operators, skiers and boarders must all be aware of current boating and water sports rules and pay attention to safe operating procedures and skiing practices at all times. If skiing or boarding is a new sport to you, seek certified training before starting. Thoroughly read all information provided by the water sports equipment manufacturer.

Always remember that the majority of water sports injuries are the result of impacts with other objects. Know the area you are boating in.

Always maintain a clear vision of where you are going and be aware of what is going on around you. Constant vigilance will go a long way toward preventing accidents. Skiers, boarders and other water sports participants must always wear a USCG-approved life jacket. It's the law!

Contact with rotating propellers is one of the most dangerous hazards that occurs from negligence of operators, passengers and bystanders. A propeller is designed to travel in the water and rotates at a speed that can cause death if it comes into contact with a human. Severing, deep lacerations, blood loss, trauma and exposure to microorganisms in the water that enter the bloodstream can result in death or serious injury.



#### STOP PROPELLER STRIKES by always using caution and:

- OBSERVING all warnings and keeping all safety equipment in use and in place.
- STOPPING the engine when swimmers are near the boat and in the water.
- MAKING SURE all passengers are seated on a horizontal seat cushion whenever the boat is in gear or moving.
- NOT ALLOWING passengers to enter the water when the engine is running.
- USING the boat's emergency stop switch at all times.
- MAKING SURE all operators are properly trained and qualified to operate the boat.
- KEEPING your eyes on your path as well as the water sports participant.
- NOT ALLOWING water sports participants to be in the path of other boaters.
- STAYING CLEAR of swimmers and other water sports participants by maintaining visual surveillance.
- KNOWING the correct water sports hand signals.
- NOT ALLOWING children under 11 years of age to occupy the open bow area unless accompanied by an adult.
- USING an observer during water sports activities.

## **Water Sports Responsibility Code**

**BE AWARE** there are risks in boating and water sports that good judgment and personal awareness can help reduce. To increase enjoyment of water sports, follow the 10 points of the code.

#### In water sports, it is the boater's responsibility to:

- ALWAYS become familiar with applicable laws, waterways and inherent risks.
- ALWAYS have a capable observer in addition to the driver, and use agreed-on hand signals.
- ALWAYS wear a properly fitted life jacket approved by your country's agency.
- ALWAYS read the user's manual and inspect equipment before use.
- ALWAYS ski and ride under control, at proper speeds and within your limits.
- ALWAYS turn the ignition off when anyone is near the boat power drive unit.
- ALWAYS stay clear of engine exhaust to avoid carbon monoxide poisoning.
- NEVER "platform drag" or touch boarding platform while the engine is running.

- NEVER ski or ride near swimmers, shallow water, other boats or obstacles.
- NEVER operate boat and never ski or ride under the influence of alcohol.

#### **Driver: Best Practices**

- The boat driver plays a critical role in the enjoyment and safety of all towed water sports participants. Do not allow inexperienced drivers to drive for skiers/riders without thorough instruction and training. We encourage all boat operators to take a boater's education course. See the state's boating authority for available courses or other operating requirements.
- Keep music at reasonable levels. Sound travels well over water.
- Wait for a clear boat path ahead before accelerating.
- Make sure to use the proper rope for the sport. A rope designed to pull a skier is not the recommended rope for towing a tube.
- If skiing, boarding or tubing with more than one person, make sure all tow ropes are the same length.
- Keep a 150-foot buffer zone on all sides of the boat and stay in water that is safe for the skier/rider and draft of the boat.
- Make sure the tow line unwinds smoothly without getting snagged on anyone or anything.
- Idle forward to make the rope tight.
- Accelerate only when the tow rope is completely tight and the skier/rider has given the "hit it" signal. The words GO and NO can be easily confused with nearby wind, water and engine noise. It is best to find another signal other than GO to tell the driver to power up. "Hit it" or "boat driver" are better options.
- Always approach fallen skiers/riders in the water from the driver's side so the driver does not lose sight of them.
- Minimize repetitive passes on any one portion of shoreline. Once you've run the same line for a while, move on to another area.

TURN OFF ENGINE when a skier/rider is near the boat, rather than running the engine in NEUTRAL. An accidental bump of the throttle when the engine is running could put the boat in gear.

- DO NOT let the tow rope slip under the boat and become tangled in the propeller. It is a good practice to keep a knife on board should this situation occur.
- Always pay attention to the water ahead, the surrounding traffic and the onboard observer. The observer must always keep the boater aware of the skier/rider status.
- DO NOT whip skiers or riders near shores, docks, other boats or fixed obstructions; they can glide 100 feet or more after they let go of the rope.




WARNING Entanglement Hazard: Never accelerate before the rope is 100% tight and before the skier/rider gives the "hit it" signal. Accelerating before the "hit it" signal is given could result in the skier/rider becoming entangled in the rope.


#### **Driving Pattern**

Check with local lake laws before driving any pattern. Some areas require operators to drive skiers/riders in preset patterns.

Operators who want to minimize the rough water for the skier/rider should use a dog-bone pattern when driving. A dog-bone pattern follows the same path from one end of the course to the other, with tight controlled turns at each end. Use this pattern where few other boats are operating.

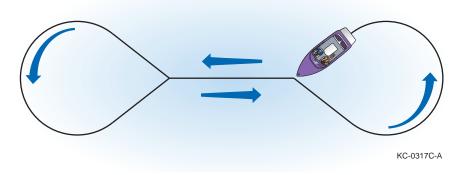

In areas where many boats are operating, use a large racetrack pattern.

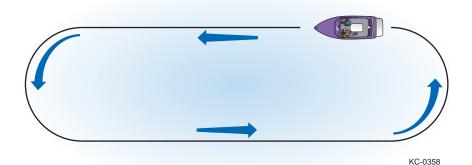

#### Falling Tips for Every Sport

- Sudden falls happen. DO NOT put any body parts (arms, legs, head) inside the rope handle.
- Tighten the life jacket straps for a snug fit.
- Let the handle go as soon as you sense you're about to fall. Falling is better than dragging.
- Roll with it. Bow your head, bend your knees, tuck in your arms and make like a beach ball.
- Signal the observer to let them know you are OK after a fall.
- After you fall, lift the ski or board above the water so other boaters can see you.
- When learning advanced maneuvers, it's best to seek training from a professional.
- A little advice will cut down on falls, shorten the learning time and reduce the chances of an injury.

#### Water Sports Tips

These tips are designed to help speed learning while ensuring safety. Practice, training from a professional and advice from experienced boaters are the best tools for learning safety when it comes to water sports.

For additional information visit: www.teamusa.org/USA-Water-Ski

**REMEMBER:** It is important to follow the manufacturer's recommendations for the intended use of the water sports equipment.

**REMEMBER:** It is illegal in many states to participate in towed water sports without a USCG-approved life jacket. Be aware that some specialized water sports vests are NOT USCG-approved and should be worn in addition to a USCG-approved life jacket.

BE AWARE: The boater is responsible for their own wakes. Be considerate of other boaters, especially small fishing boats, canoes, kayaks, paddleboards and other low-profile boats that can overturn easily. Also, be aware of your wakes in relation to swimmers, docks and boats tied to docks.



### **Upper Deck Guidelines**

Models equipped with an upper deck have some special safety considerations.

- Do not occupy the upper deck when the boat is underway.
- The upper deck capacity is 4 persons or 880 lb (399 kg) maximum.
- Distribute weight evenly port-to-starboard.
- Do not jump or dive from the upper deck at any time.
- Do not use the slide when the motor is running.
- Do not use the slide in shallow water.
- Do not use the slide if any obstructions are present around the slide or exit area.
- Instruct passengers to use caution when climbing the ladder and keep both hands on the handrails.

## Section 3

## **BOATING REGULATIONS AND YOUR** RESPONSIBILITIES

The U.S. Coast Guard (USCG) is the federal authority on U.S. coastal and inland waterways, but state and local regulations may exist that exceed USCG regulations. The purpose of all these regulations is to assist the boating public and maintain navigational order on waterways.

Many state equipment requirements go beyond USCG requirements. Contact state and local boating authorities for further information. Equipment requirements for coastal and inland waters differ. Check with local authorities or the USCG for further information about coastal water requirements.

Boating regulations are enforced by USCG, state and local authorities. Operators/ owners are subject to marine navigation regulations for both federal and state waterways. Operators/owners must comply if enforcement officers signal them to stop the boat or if they ask to board the boat.

Many USCG, state and local resources are available. For additional and current information on regulations, safety and navigation, contact the local USCG unit or local marine authority.

See the References and Contact Information section of this manual for a list of resources.

## **BOAT OWNER / OPERATOR RESPONSIBILITIES**

As a boat owner/operator, understand and be aware of USCG federal regulations as well as state and local regulations where operating the boat. Boating regulations include, but are not limited to, boat regulations, boat equipment regulations and navigational regulations.

Operators/owners must have on board at all times all mandatory safety and boat equipment as regulated by the governing authorities. All equipment must be maintained in proper working order.

#### SAFFTY

Boat owners/operators are legally responsible for their safety, the safety of their passengers and the safety of other boaters. In addition, they are responsible for the operation and navigation of the boat under all operating conditions. The boat must be in compliance with USCG safety equipment regulations.



### REGISTRATION

The USCG requires that all power boats operated on the navigable waters of the United States be currently registered in the state in which they are principally used. Many states require current registration in that state whenever boating on waters within their state boundary. Always contact state boating authorities (and authorities in neighboring states) for registration information on boats and trailers.

Registration numbers must be current and clearly displayed on the boat according to the defined regulations. Registration certificates must be current and on board at all times.

State and local authorities may require additional registration for boating on certain waterways. Check with state and local authorities for additional registration information

For more information visit:

- U.S. Coast Guard Office of Boating Safety: http://www.uscgboating.org
- National Association of State Boating Law Administrators: http://www.nasbla.org

#### INSURANCE

Boat owners are legally responsible for any damage or injury caused when they operate the boat when an accident or collision occurs. They are also legally responsible even when someone else operates the boat and causes damage or injury. Individual states have laws detailing minimum insurance needs. Contact the insurance agent to verify the type of insurance needed BEFORE operating the new boat.

## REPORTING ACCIDENTS

The USCG requires the owner/operator of a boat involved in an accident to report the incident to the proper marine law enforcement agency for the state in which the accident occurred. If a person dies or disappears as a result of a recreational boating accident, the boat owner/operator must immediately notify the nearest state boating authority. If a person dies or has injuries requiring more than first aid, the owner/operator must file a formal report within 48 hours of the accident. An owner/operator has 10 days to file a formal report for accidents exceeding \$500 in property damage or complete loss of the boat. Go to http://uscgboating.org/ recreational-boaters/, Accident Reporting, for information and form download.

### **BOATING UNDER THE INFLUENCE**



Federal and state laws prohibit the operation of a boat while under the influence of alcohol or drugs, and authorities actively enforce these regulations. If the operator's blood alcohol content is at or above the legal limit, violators are subject to civil and criminal penalties and imprisonment. Operating a boat under the influence can also result in a loss of motor vehicle driving privileges.

KCB-0011

Alcohol and drugs slow reaction time and affect judgment. This type of impaired operation may result in death or severe personal injury.

Owners/operators are responsible for their passengers, including alcohol and drug use and onboard behavior.

Regulations and penalties for operators and passengers may vary from state to state. Contact local and state boating authorities for specific information.

#### OPERATOR'S LICENSE AND EDUCATION

This manual does not provide complete training on all aspects of boating safety, operation or regulations. Boating authorities highly recommend that all boat operators and passengers seek additional training in boating safety and seamanship from a USCG-approved course.

Licensing requirements can vary widely from state to state. Most states require operators under the age of 18 to be licensed; however, some states require all operators to be licensed and have the license on the boat during operation. Some states require boat operators to complete a boating education/safety course to obtain a safety certificate before licensure. Pay special attention if you will be operating on boundary waters shared by two or more states, as the requirements may change once you cross the boundary.

Check with state and local authorities for requirements of an operator's license, certificate or training before you or anyone operates the boat.

See the References and Contact Information section of this manual for a list of some of the agencies and organizations that offer water/boating safety courses, first aid/CPR, or other recommended training and/or information.

### OPERATION BY MINORS

Minors must always be supervised by an adult whenever operating a boat. Many states have laws regarding the minimum age and licensing requirements of minors. Regulations may vary from state to state. Contact local and state boating authorities for specific information.



### **EMERGENCY ASSISTANCE**

An operator seeing a distress signal or suspecting a boat is in trouble must assume it is a real emergency and render assistance immediately as long as it can be done safely.

In accordance with Federal law, in U.S. waters, the operator must render assistance to any individual found at sea in danger of being lost, so far as the operator can do so without serious danger to the operator's vessel or individuals on board. An operator who fails to render such assistance can be fined not more than \$1,000, imprisoned for not more than 2 years, or both. The 1971 Boating Safety Act grants protection to a "Good Samaritan" boater providing good faith assistance, and absolves the boater from any civil liability arising from such assistance.

Under general maritime law in international waters on the other hand, if the operator undertakes to perform acts to rescue or aid those in distress, the operator is subject to liability for reckless or wanton conduct or, for failure to exercise reasonable care (negligence) if he worsens the position of the victim.

NOTICE The operator in charge of the boat is obligated to provide assistance to any individual in danger if such assistance can be provided safely. Carefully assess the situation at hand and assist if possible. If the operator does not possess the skills to safely assist another boat in trouble with the highest degree of care, call for help and stay in the area until help arrives.

#### NEGI IGENT OPERATION

Federal law prohibits the negligent or grossly negligent operation of a boat and/or interference with the safe operation of a boat so as to endanger lives and/or property. Some actions that may constitute grossly negligent operation (criminal offense) are:

- Operating a boat in a designated swimming area
- Excessive speed in the vicinity of other boats or in regulated waters
- Hazardous waterskiing or other water sports practices
- Bow riding, or riding on a seat back, gunwale, boarding platform or transom
- Operating a boat while under the influence or alcohol or drugs (severe penalties may be imposed for boating under the influence [BUI])





Other actions that constitute negligent operation, such as, but not limited to:

- Failure to use handhold
- Overloading or improper loading
- Using a boat in weather or sea conditions beyond the intended design of the boat or beyond the skill or experience of the operator
- Continued operation with operator's visibility blocked or impaired
- Modification to boat causing an unsafe operating condition

#### RESTRICTED AREAS

#### Security Zones

Operators must avoid all waterways and areas that are restricted, such as military installations, power plants and petroleum and chemical facilities. Because of the threat of terrorism, the U.S. Coast Guard has implemented and will continue to enforce strict limits on boats near U.S. Navy and U.S. Coast Guard ships and other potential targets.

#### **Naval Vessel Protection Zones**

Do not approach within 100 yards of any U.S. Naval vessel. Slow to minimum speed within 500 yards of any U.S. Naval vessel. Operators needing to approach within 100 yards to ensure a safe passage in accordance with the Navigation Rules must contact the U.S. Naval vessel or the U.S. Coast Guard escort vessel on the boat's VHF radio (channel 16) for authorization.

#### Commercial Shipping Safety Zones

Do not operate the boat near cruise liners or certain waterfront commercial installations such as ferry terminals. Observe and avoid all security zones and commercial port operations.

#### **Bridges and Shipping Channels**

Do not stop or anchor beneath bridges or in shipping channels. Operators doing so should expect to be asked to move and/or be boarded by law enforcement officials. Anchoring in these areas is dangerous for the operator and others on the water.



#### AMERICA'S WATERWAY WATCH

Boat operators can help the U.S. Coast Guard in keeping waterways and coastal installations safe and secure. Boat operators can do this by participating in America's Waterway Watch (AWW). Boaters reporting suspicious activities to AWW should call 877-24WATCH if noticing suspicious activity or behavior on or near the water.

In cases of immediate danger to life or property, call the U.S. Coast Guard on channel 16 VHF-FM or dial 911 for emergencies.

#### **FISHING**

Fishing can be very exciting and distracting for the operator when the action gets intense. Operators must always be conscious of the primary responsibility, which is the safe operation of the boat and the safety of passengers and other boats in the area.

Always make sure the helm is properly manned and is never left unattended while trolling. If the boat is equipped with a tower, exercise caution and sound judgment whenever someone is in the tower. Remember, weight in the tower raises the boat's center of gravity and the boat's motion is greatly exaggerated for the person in a tower.

An operator fishing in an area that is crowded with other fishing boats may have difficulty following the rules of the road. This situation can become especially difficult when many boats are trolling. Being courteous and exercising sound judgment is essential. Avoid trying to assert the right-of-way and concentrate on staying clear of other boats. Prevent the boat from becoming entangled in lines and from cutting into lines. Also keep in mind that fishing line wrapped around a propeller shaft can damage seals in the engine lower unit.

There is currently a tremendous drain on our fishing resources. Excessive fishing and hunting, as well as pollution, have strained the fish and game population. Help out by keeping only what you will eat; practice catch-and-release and obey bag limits.

#### Monofilament Fishing Line

Wildlife can experience harm from becoming entangled in or ingesting monofilament fishing line if it is left in the water or on shore. Line in the water can also endanger swimmers and divers and become tangled in boat propellers, causing damage. It can last for years in water, posing a threat for a long time. Fishing line can remain a problem even if put in the trash, because birds can take it from an open bin and become entangled or it can entangle wildlife at landfills.





Many states and private boating/wildlife organizations sponsor programs to collect used line for recycling into new products. Operators who carry used line or happen upon it while boating can dispose of it in recycling bins located at many marinas, launches, tackle shops and state service centers.

#### WAKE

Boat owners/operators are responsible for the wake the boat creates. Regulations may vary from state to state. Contact local and state boating authorities for specific information, as owners/operators may be responsible for any damage or injury their wake causes. Always be alert for no-wake zones and be courteous of others while boating. Excessive and unexpected wakes can cause dangerous and even lifethreatening situations.

#### NOISE

Boat owners/operators are responsible for the noise the boat creates. Many state and local boating authorities enforce noise limits that may restrict engine noise, radio volume or even loud talking. Regulations may vary from state to state. Contact local and state boating authorities for specific information.

#### SPFFD

Boat owners/operators are responsible for maintaining the boat under control at a safe speed. Many state and local boating authorities enforce speed limits. Regulations may vary from state to state. Contact local and state boating authorities for specific information.



#### PROTECTING THE ENVIRONMENT

Our lake, river and ocean resources must be protected to be enjoyed by future generations. Boat owners/operators are responsible for protecting the natural environment and wildlife by keeping waterways clean.

U.S. waters are covered by several water pollution regulations administered by numerous federal and state agencies. Laws vary between local, inland, coastal, ocean and international waters. Laws can be enforced by local and state authorities as well as the USCG. For recreational boats, U.S. Federal Water Pollution Control, Oil Pollution Control and Refuse Acts cover U.S. waters, and the MARPOL treaty covers international waters. In any case, pollution prevention centers around three areas:

- Sewage pollution
- Garbage (solid waste) pollution
- Oil pollution

As a boater, make it a point NOT to dump or discharge ANYTHING into waters and tell passengers to respect this rule. Return all trash after boating and dispose of it properly on shore.

#### DISCHARGE OF OIL PROHIBITED

The Federal Water Pollution Control Act prohibits the discharge of oil or oily waste into or upon the navigable waters of the United States, or the waters of the contiguous zone, or which may affect natural resources belonging to, or under the exclusive management authority of the United States. If such discharge causes a film or discoloration of the surface of the water, or causes a sludge or emulsion beneath the surface of the water. Violators are subject to substantial civil penalties and/or criminal sanctions including fines and imprisonment.

KC-6020

## **AQUATIC INVASIVE SPECIES (AIS)**



KC-6027

Aquatic Invasive Species (AIS) are plants and animals that occur in waters in which they are not native and whose introduction causes or is likely to cause economic or environmental damage or harm to human health. AIS have a negative impact on the waterway, its native species, and recreational and commercial uses of the waterway. As responsible boaters and citizens, each boat owner should do their part to prevent the spread of these aquatic hitchhikers.

In many cases, it is also required by law. Check local regulations for any waterway where you will boat.

After each boating trip, follow these three simple steps before you leave the water access to stop the spread of AIS: Clean, Drain, and Dry. This is the boater's way to help protect the environment from the damage that AIS can cause.

#### Clean

- Inspect and remove all aquatic plants, animals, mud, and debris from the boat, engine, trailer, anchor, and any watersports equipment.
- Rinse, scrub or wash, as appropriate, away from storm drains, ditches, or waterways.
- Rinse watercraft, trailer, and equipment with hot water, when possible.
- Flush motor according to owner's manual.

#### Drain

Completely drain all water from the boat and its compartments, including but not limited to the bilge, wells, lockers, ballast tanks or bags, bait containers, engines, and outdrives.

#### Dry

Allow the boat to completely dry before visiting any other bodies of water. Waterborne organisms cannot survive long periods of dryness.

NOTE — Some localities may require inspection or decontamination before and/or after launching. Check state and local laws and regulations for requirements prior to traveling to go boating.

### PAINTS

Boat owners are responsible for the environmental regulations that may govern the use of antifouling paint. If the boat is kept in water where marine growth is a problem, the use of antifouling paint may reduce the growth rate. Regulations may vary from state to state. Contact local and state boating authorities for specific information.

### **CLEANING AGENTS**

Boat owners are responsible for the environmental regulations that may govern the use of cleaning agents. There are many "green" cleaner choices available for most any material on the boat. If using household cleaners, use them sparingly and never discharge them into waterways. Do not mix cleaners and be sure to use plenty of ventilation in enclosed areas. Avoid using chlorine, solvents and products that contain phosphates, as well as non-biodegradable or petroleum-based products. Regulations may vary from state to state. Contact local and state boating authorities for specific information.



### **EXHAUST EMISSIONS**

Boat owners are responsible for the exhaust emissions from the boat. Increased exhaust (hydrocarbon) emissions, which are regulated by the EPA, pollute the water and air. Contact the dealer and the engine manufacturer for more information. Additional restrictions may apply and vary from state to state. Contact local and state boating authorities for specific information.

## Section 4

## **EMERGENCIES**

Be prepared to deal with emergencies before they happen. Try to formulate a plan for each type of emergency in advance in order to make decisions quickly and without hesitation. Precious moments lost can mean the difference between losing and saving a life.

Before operating the boat, review Safety in Section 2.

### FIRST AID / MEDICAL EMERGENCIES

Every second counts toward preventing injury or death in case of a medical emergency. Boaters must have proper training and take necessary preventive measures to properly assist in times of need. Carrying an adequate and current first aid kit is critical in the immediate response and care of someone in need of medical attention. Always have dry blankets readily accessible to help prevent hypothermia. For additional information on medical, first aid and safety training such as CPR, contact your state and local authorities, or visit the Red Cross website:

http://www.redcross.org.

## **EMERGENCY PREPARATION CHECKLIST**

In addition to a safety equipment list, have an emergency checklist on board to assist in times of emergency. Use the following topics as a guideline to develop a list of emergency procedures and instructions for the use of visual and audible distress signaling devices, radios, first aid kits and all related information that could assist you or others in the event of an emergency.

## **USING DISTRESS SIGNALS**

Ensure all passengers understand how to operate all onboard visual and audible distress signaling devices and communication equipment. Keep all distress signaling devices and communication equipment in a readily accessible area and within immediate reach at all times. Seconds count during emergencies. Knowing the proper way to use the distress signaling devices aboard the boat can help save lives.





See the Markers, Warnings and Advisories section of this manual for more signaling devices.

If your boat is equipped with a VHF radio, there are three primary distress calls:

- **MAYDAY radio call** A mayday call is reserved for life-threatening situations, such as fire, severe weather or sinking, where lives are in imminent danger or the boat is in danger of sinking. Start the broadcast clearly and calmly with "Mayday - Mayday - Mayday."
- PAN-PAN (pahn-pahn) radio call A pan-pan call is used for urgent but non-life-threatening situations where there is no immediate danger to lives or the boat, such as a loss of steering control or taking on water of any amount. Start the broadcast clearly and calmly with "Pan - Pan - Pan."
- Securite (se-cure-ih-tay) call A securite call is used for non-lifethreatening situations to notify authorities and others in the vicinity of important navigation and weather alert calls. Start the broadcast clearly and calmly with "Securite - Securite - Securite."

In an emergency situation the responder needs to know four important pieces of information:

- The exact nature of the emergency and an assessment of the severity
- Number of people on board
- The location (navigation marker, visual reference or GPS coordinates in open water)
- What the boat looks like (hull and top colors, unique features, flags, etc.)

For additional information on the safe and proper use of distress signaling devices and the safe and proper use of emergency communication equipment, contact state and local authorities. Additional information can be found on the USCG website:

http://www.uscgboating.org.

## REQUESTING ASSISTANCE (NON-DISTRESS CALL)

If a boater contacts the USCG on Channel 16 VHF-FM or Channel 70 DSC regarding a non-distress situation, the USCG will offer to contact any assistance provider (commercial or friend) the boater requests or will issue a Marine Assistance Request Broadcast (MARB) if the boater has no preference of service.

### FIRE AND EXPLOSION

WARNING Fire/Explosion Hazard: Gasoline is extremely flammable and highly explosive under certain conditions.

- Do not smoke or allow open flames or sparks nearby when refueling.
- Do not store fuel in any containers or compartments which are not designated for fuel storage.
- Static electricity can be generated while fueling and can cause a fire or explosion. To prevent electrostatic spark when refueling, make sure the nozzle is in contact with the fill pipe at all times.
- Avoid damaging fuel lines and connectors and make sure fuel does not contact hot engine parts.
- Do not confuse the fuel fill deck plate with the water or waste fill plates, if equipped. All deck plates are properly labeled. If fuel is accidentally pumped into any other deck plate, do not attempt to pump it out. Water and waste pumps are not designed to pump fuel and a fire or explosion could result. Contact the dealer to have the fuel professionally removed.
- USCG-approved fire extinguishers are required on all Class I, II and III boats

A fire or explosion may occur when least expected. The decision to abandon the boat or stay to fight the fire is difficult and depends on many factors. Formulate a fire plan in advance to make that decision quickly and without hesitation. Keep in mind the following guidelines:

> Many fires are the result of gasoline and oil accumulating in the bilge, careless fueling practices and electrical problems. In the event of a fire, try to stop



KC-0075C-A

- the boat and turn off the engine as quickly and safely as possible. Immediately use a fire extinguisher at the base of the flames in a sweeping motion to reduce or extinguish the fire. Ensure that all passengers are safe from immediate danger and are wearing life jackets. If the fire is located in the engine compartment (if equipped), make sure the bilge blower (if equipped) is off and do not open the engine cover.
- Once the fire is extinguished, check for other immediate fire threats and personal injuries and call for assistance immediately.

## SECTION **EMERGENCIES**

If you are unable to easily extinguish the fire, or if the fire is uncontrollable, attempt to get yourself and all passengers off the boat and into the water. If possible, ensure that all passengers are wearing life jackets or have access to one by the time they are in the water. Before leaving the boat, if possible, verify that there is no immediate danger of fuel sitting or burning on the water's surface where you and your passengers will be floating. Immediately swim to a safe position upwind from the boat and use distress signals to get assistance.

## MAN OVERBOARD (MOB)


A high percentage of boating fatalities are the result of people falling overboard, many of whom were not wearing life jackets. If someone falls into the water unexpectedly, react quickly, as every second counts toward preventing injury or death. Keep these guidelines in mind:

- Brief passengers before leaving the dock on the proper procedures should someone fall overboard. Add this briefing to the passenger safety equipment overview.
- At the first sign that a person has fallen overboard, loudly yell "man overboard" and state which side of the boat such as "man overboard port!" In heavy seas, throw a floatable item toward the MOB as quickly as possible to serve as a marker.
- The operator should immediately reduce speed and determine whether or not to come to a full stop or circle around.
  - If stopped, throw a flotation device (Type IV is best, but any can be used) to the victim, shut down the engines, and throw the victim a line if necessary.
  - If circling around, assign one passenger to throw a flotation device as a marker, keep the victim in sight and continuously point to the victim. Carefully navigate back to the victim, staying at a safe distance, and position the boat safely to retrieve the victim. Keep current, wind and waves in mind so the victim drifts toward the boat. Shut down the engines and throw the victim a line if necessary.
- Move passengers to the rescue side of the boat to assist the victim back into the boat.
- Avoid going into the water to assist the victim unless there is no other way to retrieve the victim. If a rescuer must go into the water, the rescuer should be wearing a life jacket. The rescuer should also be prepared for the possibility of being pulled under water by the victim if the victim is panicking.

### CAPSIZING AND FLOODING

A boat may capsize or flood when least expected. Formulate a plan in advance in case of capsizing or flooding. Review the following quidelines:

> If the boat capsizes, locate all passengers and guide them to a safe flotation device or the forward hull if the boat is floating upside down.



- If possible, provide life jackets to all persons in the water and assess them for alertness and injuries.
- STAY WITH THE BOAT! Climb up on the hull and try to get assistance.
- Do not try to swim to shore, as it can be farther than it appears.

If the boat starts to flood, slow the boat to a safe speed and stop as quickly as possible. Activate the bilge pump(s) immediately. Try to locate the cause of the flooding. If the cause is not readily apparent or not easily corrected, head for shore or shallow water as quickly as possible and call for help.

## RUNNING AGROUND

When a boat runs aground, the stop is usually abrupt. Because passengers are not secured to a seat, abruptly stopping a boat while in motion can cause serious personal injury or even death. First, turn off the engine(s) immediately, locate all passengers and attend to any injuries, calling for emergency assistance as needed. Then, assess the damage to the boat and determine if there are any other immediate threats such as water leaking into the boat, or fuel or flammable materials leaking into the water or inside the boat. Immediately call for assistance if threats exist that could endanger the safety of passengers.

If there are no immediate safety threats to passengers and the boat is not damaged, attempt to propel it away from the obstacle. If the engine or drive system has been damaged and the engine restarts, be aware of excessive vibrations or uncommon noises, which usually indicate damage to the drive system. If this is the case, it is not safe to proceed. Call for emergency or professional towing assistance immediately.



WARNING Personal Injury Hazard: DO NOT attach tow lines to cleats, watersport line point, or eyes used for docking; use only designated strong points. Death or serious injury could occur if lines and/or hardware fail while they are under extreme tension.

If the engine restarts and the boat can be navigated safely back to port, proceed slowly to port and be ready to call for emergency assistance if needed. Even if the boat and engine appear to be in good operating condition after running aground, have the boat inspected by a qualified marine technician BEFORE returning it to service. Damage may have occurred that is not obvious to you as an operator.

#### DANGEROUS WEATHER

Take special precautions when encountering or operating in dangerous or hazardous weather conditions.

See the Severe Weather section of this manual for additional information.

### **ENGINE OR BOAT SYSTEM FAILURE**

In the event of an engine or boat system failure and when not in immediate danger, try to troubleshoot or identify the problem before calling for assistance.

See the *Troubleshooting* section of this manual for additional information.

## ACCIDENTS. COLLISIONS AND GIVING ASSISTANCE

A collision or accident may occur when least expected. Formulate a course of action in advance in case of a collision or accident. Keep in mind the following auidelines:

- If an accident or collision occurs involving the boat, locate all passengers first and verify and secure their safety. Check for injuries and provide all passengers with a flotation device.
- After determining that passengers are not in danger, provide assistance to passengers on the other boat.
- Immediately call for help and then assess the damage to the boats. Render necessary assistance to prevent further damage or personal injury.

The USCG requires the owner/operator of a boat involved in an accident to report the incident immediately to the proper marine law enforcement agency for the state in which the accident occurred.


See the Reporting Accidents section of this manual for additional information.

An operator who witnesses or is aware of an accident or collision while boating must report it immediately and provide assistance.

Operators seeing a distress signal or suspecting a boat is in trouble must assume it is a real emergency and render assistance immediately. After determining that a real emergency exists, call for help immediately and then provide assistance to all passengers to ensure their safety.

#### TOWING ON THE WATER

In situations where an operator is asked to tow or be towed for any reason, assess the situation and try to contact a professional towing service or other emergency assistance first. When encountering a boat in distress, always offer emergency or safety assistance and/ or call for assistance for the



distressed parties if necessary. Towing or being towed presents an increased risk of personal injury and boat damage.

WARNING Personal Injury Hazard: DO NOT attach tow lines to cleats, watersport line point, or eyes used for docking; use only designated strong points. Death or serious injury could occur if lines and/or hardware fail while they are under extreme tension.

Follow these guidelines when towing or being towed:

- Use extreme caution when throwing weighted lines to a boat in distress. When in rough seas, use a light throwing line with a weight secured on the throwing end and a heavier towing line secured to the other end.
- Never attempt to tow a boat larger or heavier than your own.
- Never attempt to tow a grounded, damaged or capsized boat.
- Use a tow line that is rated at least four times the gross weight of the boat being towed.
- Make sure tow lines are in good condition and are free of damage, cuts or abrasions.
- Attach a tow line to the designated strong point on the disabled boat. Never attach a tow line to any point on the disabled boat other than the designated strong point. Strong points are typically the bow and stern eyes on boats under 26' and are usually labeled.
- When attaching to the stern strong points, wrap the tow line with chafing gear where it rubs against the boat or any corners.



- Leave at least two boat lengths between the boats for adequate movement.
- Never allow anyone to be in line with the tow line. If the line breaks, pulls free or the hardware fails, dangerous recoil could occur, resulting in severe injury or death to anyone in its path.
- Adjust the tow line to match wave action. Keep the boats on the crest or in the trough of the waves at the same time. In protected, calm waters, shorten the line for better handling.
- Tow at moderate speed, allowing for adverse wind and wave conditions.
- Have the operator of the towed boat steer with you if possible.
- Have a person on the tow boat watch the disabled vehicle and, if necessary, be available to signal the operator of the disabled boat.

Check with local and state authorities prior to towing for additional regulations and restrictions on towing other boats or equipment.

Pontoon boats pose an additional challenge during slow-speed maneuvering in breezy conditions. The combination of light weight and high side-surface area can produce a "sail" effect that pushes the boat around, making docking especially tricky at times. If you feel the boat being pushed adversely when approaching the dock, it may be necessary to "abort" the maneuver and circle around for a different approach.

## LAW OF SALVAGE

If boaters require assistance while cruising in the Great Lakes, coastal or ocean waters, they should use caution **before** allowing any towing company or private agency to pass a line to the boat. The law of salvage says, among other things, "...any vessel, if rendered assistance from a towing company or private agency, can be forced to relinquish a portion of the vessel's worth for the assistance received." While this is very rare with recreational boats, it can happen.

Before taking the line boaters must establish that they do not agree to any salvage rights and wish to be assisted on a contract basis. Boaters must then establish the contract price and payment terms. Boaters should accept the tow line only when the captain of the company/agency acknowledges the contract price and payment. Most tow companies are reputable and post terms and pricing on their websites.

If boating in the Great Lakes, coastal or ocean waters, it is a good idea to have a membership in a national towing service. This membership can significantly reduce the costs of towing if ever needed.

### **HURRICANE AND SEVERE WEATHER PREPAREDNESS**

If keeping the boat in a region susceptible to hurricanes or severe weather (such as in the Great Lakes), have a well-thought-out plan for the boat long before the season starts. Consider the following:

- Boaters new to the area should talk to neighbors and local officials on what to expect.
- Boaters should talk to the dealer and marina about supplies, equipment and services available.
- Assemble the boat, contacts and insurance information and copy documents for safekeeping.
- If keeping the boat on the water, prepare a hurricane mooring package with extra lines, fenders and chafing protectors, as it is usually the boat owner's responsibility to provide mooring gear in a marina. Plan on doubling the normal lines (bow, stern and spring) and fenders as a minimum. Remember, once a hurricane watch is posted, the local supply of lines and fenders will be quickly depleted.
- Remove electronics, canvas and loose items such as fighting chairs.
- Remove flammable, explosive or hazardous materials.

### PROTECTING THE BOAT FROM THEFT

Thefts of boats, propulsion units and electronics are on the rise due to the high values and easy resale. While thieves still target boats on trailers at homes or on lake properties, marinas, storage facilities and dealerships are now being targeted because of the concentration of high-quality outboards and electronics available. Consider the following to make it difficult for thieves:

- Remove expensive electronics or cover with a sturdy, lockable cover.
- Use locking devices on outboard motor mounts and propellers.
- Use security fasteners that require a special tool for removal when mounting devices.
- Survey the marina or storage facility for obvious security lapses. Discuss concerns with personnel or find a new location.
- Talk to neighbors at home or the marina/storage facility and provide them with a cell phone number and other contact information.
- If leaving the boat in the water, install a boat monitoring system with GPS tracking. Many propulsion unit manufacturers now offer this as an option on boats with electronic controls.
- Consult an insurance agent and local authorities for more recommendations



This Page Intentionally Left Blank

## Section 5

## OPERATING IN HAZARDOUS **CONDITIONS**

Before operating the boat, review Safety in Section 2.

#### SEVERE WEATHER

Getting caught in severe weather can be dangerous and even fatal. Check with local weather stations, the USCG or weather-service broadcasts (162.55 or 162.40 MHz) for the latest conditions. Check the weather not only before you go out on the water, but also periodically while you are on the water. Consult the following websites for weather information:

- www.weather.com
- www.weather.gov
- www.navcen.uscg.gov

#### STORM CONDITIONS

Take the following precautions if operating the boat in storm conditions:

- Have all occupants wear life jackets.
- Turn on navigation lights.
- Locate and have inclement weather gear and safety equipment ready.
- Mark or identify the boat's position.
- Close all ports, stow all gear and secure any loose equipment on deck.
- Reduce speed and head for port or a safe, easily reachable place.
- Keep a lookout for debris and obstructions in the water.
- When possible, head into the waves at a 45-degree angle. Allowing high waves to strike the side of the boat may cause it to capsize or swamp.
- If losing power, keep the boat headed into the waves by rigging a sea anchor off the bow.
- If a storm cell with lightning cannot be avoided, lower antenna and take down fishing poles.



#### **FOG CONDITIONS**

Avoid operating the boat in foggy weather, if possible. Operators encountering fog conditions should return to port immediately. Also, take the following precautions:

- Reduce speed to a safe speed or idle.
- Take bearings and log the course and speed before the fog sets in. Use of a GPS is recommended.
- Have all occupants wear life jackets.
- Assign lookouts to the bow and stern to keep watch and listen.
- While navigating in fog, sound a five-second blast from the horn or whistle once every two minutes to alert other boaters of your position.
- If it is unsafe to continue navigating the boat, quickly find the best position to anchor. Sound a five-second blast from the horn or whistle once every minute while anchored to alert other boaters of your position.

#### REDUCED VISIBILITY

Natural environments and inclement weather can cause reduced visibility. Storm condition hazards can be compounded by reduced visibility while on the water. Always use common sense and take safety precautions if operating the boat in reduced visibility conditions.

## **COLD WEATHER**

Avoid operating the boat in cold water or weather conditions, and never operate in frozen or icy waters. Operating in these conditions significantly increases the risk of serious injury or death. Boating in these conditions can lead to cold-water immersion, shock or hypothermia. Weather conditions may hinder emergency rescue or assistance, and cold weather poses potential problems for onboard equipment, as well as the engine. See the Engine Operator's Manual and the equipment manufacturer's instructions for operating in cold weather.

## **WATER HAZARDS**

Every waterway poses hazards that operators must be aware of and avoid. These hazards include shallow water, rocks, tree stumps, sandbars and submerged/semisubmerged cables and pipes. Ask local authorities and other boaters for information and consult a marine chart when boating on unfamiliar waters. As a boat operator, try to avoid all hazards, known and unknown.

## **AQUATIC VEGETATION / WEEDS**

Operating in weeded areas can be hazardous. Aquatic vegetation can be a threat to the boat's drive system. Vegetation and weeds can wrap around the propeller. causing loss of propulsion and steering control. They may also restrict the engine water cooling intake, causing the engine to overheat. Avoid operating in or near vegetation. If restricted because of vegetation, stop the engine. See the Engine Operator's Manual for recommendations on the removal of vegetation from the propeller and water cooling intake ports. Be extremely careful and never get into the water when clearing the propeller. Stay out of the water in highly congested vegetative areas, which can severely restrict your mobility and create a lifethreatening situation.

NOTICE Vegetation can sometimes be removed by shifting to NEUTRAL, pausing a moment, then shifting to REVERSE to unwind the vegetation from the propeller.

#### DAMS AND SPILLWAYS

The waterways around dams and spillways are extremely hazardous. Dams and spillways are subject to rapid water flow changes, and may have floating and sunken debris in the nearby water. These areas are often marked as restricted, and it is best to always stay clear of them.

#### SHALLOW WATER OPERATION

WARNING Collision Hazard: Use caution in shallow water or where underwater/floating objects may be present. Hitting an object at high speed or severe angle can seriously injure people and damage the boat.

Operating in shallow water presents a number of hazards. Sandbars in narrow inlets are constantly shifting, making it difficult to mark them with buoys. Sandbars are sometimes indicated by waves as they form into breakers when passing over the sandbar. In coastal areas, tides can affect water level as much as 30 feet (9 meters). Check with local marinas or Coast Guard stations for tide tables and current charts.



## MARKERS, WARNINGS AND ADVISORIES


Find out from local authorities if hazards exist in areas where you intend to navigate, and know how these hazards are marked. You must also recognize flag designs that indicate hazards or activities that are present and keep well clear of those areas. Always watch for swimmers and stay clear of all swimming areas, marked or unmarked.

Become familiar with navigation markers, which identify navigable routes and indicate water hazards. Always stay within marked boundaries and steer clear of hazards.



Flags and indicators are markers of potential emergencies and hazards. Become familiar with these flags and indicators. Additionally, understand your responsibilities when operating at these times and in these areas.

#### **BOAT FLAGS**



KCB-0013

Storm warning advisory flags and indicators alert boaters to impending weather conditions. Become familiar with these flags and indicators and understand the potential hazards associated with operating in these conditions.

## HARBOR FLAGS AND INDICATORS

DAYTIME WARNING	DESCRIPTION	NIGHTIME WARNING
	Small Craft Advisory - Winds greater than 18 knots, sustained for two hours or more or hazardous wave conditions. Following a storm, hazardous wave conditions can persist long after the high winds have subsided.	
	Gale Warning - Sustained winds (2 or more hours), of 34-47 knots.	
	Storm Warning - Sustained winds of 48 knots or greater.	
	Hurricane Warning - Forecast winds of 64 knots and above. Displayed only in connection with a hurricane.	
Actual Signal in red		

KC-0371C



This Page Intentionally Left Blank

## Section 6

## **NAVIGATION RULES AND AIDS**

Before operating the boat, review Safety in Section 2.

The following information outlines basic navigational rules. Boating regulations are enforced by USCG, state and local authorities. You are subject to marine navigation regulations for both federal and state waterways. For more information, contact the USCG, state and local marine authorities. The navigational rules for U.S. waterways can be found in the "Navigational Rules" publication. This publication can be found at most marine supply stores, or you may contact the USCG or visit:

www.navcen.uscg.gov to view or download the publication.

### **RULES OF THE ROAD**

#### RIGHT-OF-WAY

Boats with less maneuverability have right-of-way over more agile boats. You must stay clear of a boat with right-of-way. Examples of boats with right-of-way are:

- Boats aground or not under command
- Boats with restricted maneuverability
- Boats engaged in fishing
- Non-motor boats (having no power propulsion), i.e., rowboats, paddle boats, canoes and sailboats

Small pleasure boats must yield right-of-way to large commercial boats in narrow channels. A boat with right-of-way is sometimes referred to as the privileged boat.


#### The General Prudential Rule

The general prudential rule regarding right-of-way is if a collision appears unavoidable, neither boat has right-of-way. Both boats must act to avoid collision.




### **CROSSING**

In crossing situations, the boat to the right from the 12 o'clock to the 4 o'clock position has the right-of-way and must hold course and speed. The boat without right-of-way must yield and pass to the stern of the privileged boat. Boats going up and down a river have the right-of-way over boats crossing the river.



## **MEETING HEAD-ON**


When two boats meet head-on, neither boat has the right-of-way. Both boats should decrease speed, turn to the right and pass port to port. If, however, both boats are on the left side of a channel, each vessel should sound two short horn blasts and pass starboard to starboard.





### **OVERTAKING / PASSING**

The boat overtaking or passing must yield right-of-way to the boat being passed. The overtaking boat must make any adjustments necessary to keep out of the way of the boat being passed. The boat being passed has the right-of-way and must hold its course and speed.

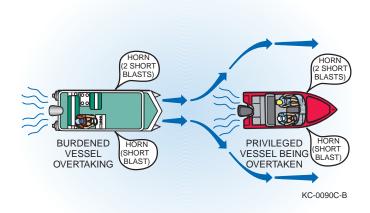

### **AUDIBLE SIGNALS**

It is not necessary to sound a signal every time a boat is nearby. It is typical for commercial boat operators to signal their intention, using a whistle, horn or bell, to avoid potentially confusing or hazardous situations. Privileged boat operators customarily signal first, then the yielding boat operators return the same signal to acknowledge they understand and will comply. Use the danger signal (five or more short, rapid blasts) if intent is not clear.

Use the following signal blasts early enough so other boaters notice and understand them:

AUDIBLE DISTRESS SIGNAL	DEFINITION	
One long blast	Warning signal (coming out of slip or passing astern)	
One short blast	Pass on port side	
Two short blasts	Pass on starboard side	
Three short blasts	Engine(s) in reverse	
Five or more short blasts	Danger signal	

## AIDS TO NAVIGATION

Learn to recognize the different buoys and day markers; they are the signposts of the waterways. The United States Aids to Navigation System (USATONS) is the primary marking system used on inland water, coastal waters and rivers. This system is maintained by the USCG.

There are two other navigation marking system variations boaters must follow in the United States:

- Western Rivers Marking System When on the Mississippi River, tributaries above Baton Rouge, and several other rivers that flow toward the Gulf of Mexico.
- Intracoastal Waterway (ICW) Runs just inland and parallel to the Atlantic Ocean and Gulf coasts from Manasquan, New Jersey, to the Mexican border. Since ICW routes may travel next to non-ICW routes in opposing directions, navigate by the yellow symbols when following the ICW.

Both systems are similar to USATONS but have subtle differences that must be understood. If you boat in these areas, visit www.uscgboating.org for navigation rules.



Navigational aids are designed and placed accordingly to help you navigate safely on the water. Learn to recognize the different buoys and day markers.

The following information is based on the USATONS. For further information, contact the USCG and state and local marine authorities. Also visit www.uscg.boating.org for navigation rules.

The USATONS uses buoys, beacons and minor lights as markers.


NEVER tie or anchor to a navigational aid. This action is unlawful and dangerous to you, your boat and other boaters.

NEVER move or damage a navigational aid. This action is unlawful and dangerous for other boaters.

#### BUOYS

Most anchored floating markers are generally referred to as buoys. Buoys have many uses and color schemes, and can vary in size and shape. The most commonly used buoy colors are white, red, green, yellow and black. Buoys may be unlighted or lighted. Some are audible; others have both an audible and a visual signal. Lights, bells and horns on buoys aid in night boating or poor visibility conditions. Buoys with unique light-flashing characteristics are identified on nautical charts with the specific flashing pattern.

Become familiar with the specific buoys used in the waters where you are boating. Contact local authorities for specific information and/or navigational aid charts for your waterways.



KC-0052C-B


## **Mooring Buoys**

The only buoys you are permitted to moor to are mooring buoys. Mooring buoys are white with a blue horizontal stripe. Check with local authorities before deploying a permanent mooring buoy. Mooring to a navigation buoy, regulatory markers or lateral markers is illegal.



## DAYMARKS / DAYBOARDS

Daymarks or dayboards are fixed visual markers in the water. The markers are commonly attached to a post or piling and are sometimes accompanied by a light. Daymarks are either red or green and are usually triangular- or square-shaped,



though their shapes can vary. Daymarks often display numbers, which act as navigation guides. Red daymarks are usually triangular and sometimes show an odd number. Green daymarks are usually square and sometimes show an even number. The numbers on the markers are sequential and increase from seaward.

# LIGHTS AND LIGHTED STRUCTURES

Maneuvering a boat at night can be dangerous and confusing. To aid boaters with navigation and to warn of hazards, the USCG and state and local authorities maintain a variety of light structures. Some light structures are equipped with radio beacons, radar reflectors and/or fog signals.

## **Minor Lights**

Minor lights are colored according to the buoyage marking system in use. They are similar to lighted buoys, except they are usually higher and on more stable platforms to increase visibility. Most minor lights are part of a series to mark a channel, river, or harbor and fairways.

# Range Lights


Range lights are usually visible in one direction and help a boat operator navigate safely. Steering a course to keep range lights arranged in a line (one on top of the other) will help guide a boat through a channel.



# SECTION

# **NAVIGATION RULES AND AIDS**

#### RANGE LIGHTS

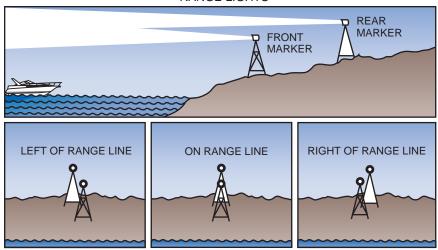

KC-0022C-A

## Lighthouses

Lighthouses can be found at harbor entrances, prominent headlands, isolated danger areas and along the coasts. These striped or patterned structures have unique flashing signals, which help boaters identify them.

## MARKERS

Seven (7) types of markers are used to assist the boat operator:

- Regulatory
- Range
- Special
- Lateral
- Safe Water
- Preferred Channel
- Isolated Danger



KC-0023C-B


## **Regulatory Markers**

Regulatory markers are used to display information or indicate danger. Regulatory markers can be fixed visual markers or anchored floating buoys.

Fixed visual markers are usually white with orange geometric shapes that display information. Anchored floating buoys are white cylinder-shaped buoys with orange bands at the top and orange geometric shapes that may display information.

Following are the various orange geometric shapes used on these markers:

- Diamond Indicates danger
- Diamond with cross marks inside Indicates that a boater must keep away
- Circle Indicates a controlled area or speed limit
- Square Displays important information



KC-0244C-A

# Range Markers

Range markers have many color schemes, may have numbers or letters and may be lighted or unlighted. They are placed in pairs within close distance of each other. They are commonly used in channels to guide boats safely through the center or safe line of navigation. Keep range markers visually in line with each other while navigating the waterway to avoid obstacles or other invisible dangers.

# Special Markers

Special markers are yellow and come in various styles and shapes. Lighted and unlighted daymarks and buoys vary in function. Many are used to display information and navigational direction rules. The most common special markers are those used in intercoastal waterways. Contact your state and local authorities for more information on special markers used in your boating area.



#### Lateral Markers


Lateral markers are used to mark the sides of navigable channels. They can be buoys, daymarks or minor lights, and are red and green in color. They can be lighted or unlighted and may or may not have numbers.

The basic nautical rule of lateral markers is the phrase "Red, Right, Returning."

The term "sea" generally refers to the ocean or a large body of water. "Seaward" refers to traveling from the sea or a large body of water inland or to a smaller body of water.

When traveling seaward - keep red markers to your port (left) and green markers to your starboard (right).

When returning from seaward – keep red markers to your starboard (right) and green markers to your port (left).

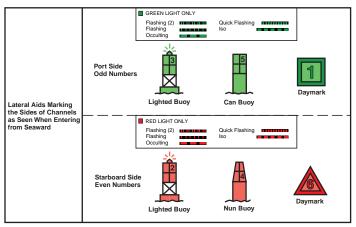


KC-0054C-A



#### Safe Water Markers

Fairways and mid-channels may be marked with safe water markers or buoys. These markers indicate safe water all around. Safe water markers are red and white with vertical stripes, and are round or have a red spherical top mark.



KC-0055C-A


#### Other Special Signs and Markers

Various signs and markers are used throughout U.S. waterways for different purposes. In Florida, special signs are used to warn of "manatee" areas. These signs help to control speed and/or restrict areas from boating to conserve this endangered species. As a boat owner and operator, be aware of special information and markers on the waterways. Contact your state and local authorities for more information on local restricted or controlled areas and their markers.

#### **Preferred Channel Markers**

Obstructions, channel junctions and preferred channels are marked with red and green horizontally striped can and nun-style buoys. The top band color indicates the preferred path to take. Use these markers in the same manner as lateral markers to follow preferred channels.




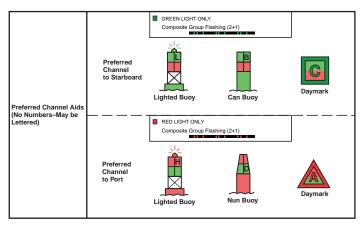

KC-0056C-A

#### **Isolated Danger Markers**

Isolated danger markers indicate an isolated danger which may be passed on all sides. These markers are black with one or more broad horizontal red bands and are equipped with a top mark of two black spheres, one above the other. On inland waters, a buoy with alternating vertical black and white stripes may be used to indicate that an obstruction or other danger exists between the buoy and the nearest shore. Do not pass between the buoy and the shore.



KC-0057C-A

# NAVIGATIONAL LIGHTS AND NIGHT OPERATION

Navigational lights are intended to alert other boats to your presence and course and their use is essential to boating safety and the prevention of collisions. Knowledge of navigation lights is necessary for the boat operator.

Regulations require that navigational lights be clearly lit and properly displayed at all times between sunset and sunrise, and always when operating in reduced visibility. Where applicable, lights must appear on the sides, stern, masthead and all-around positions. While underway, especially in congested areas, turn off any show lighting and lighted accessories.


All navigational rules apply at night, but speed is restricted on many waterways. Night boaters must operate at a slow, safe speed and stay clear of all boats, regardless of which boat has right-of-way.

Protect your night vision by avoiding bright lights and dimming courtesy lights. If possible, have a passenger help keep watch for other boats, water hazards, and aids to navigation.

The size, speed and direction of other boats are determined at night by white, green and red running lights.

- A green light indicates the starboard side of the boat. Generally, if you see a green light on another boat, you have the right-of-way. Hold your course.
- A red light indicates the port side of the boat. Generally, if you see a red light on another boat, they have right-of-way and you must yield your course.
- If you see both red and green lights, this indicates the boat is pointed towards you. Reduce speed and give a wide berth, usually on your port.
- A white light alone with no visible red or green lights indicates a boat at anchor and not making headway or a non-powered craft. Reduce speed and give a wide berth.



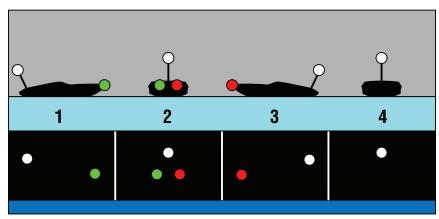

KCB-0104

- 1. Starboard Side; boat moving to the right
- 2. Bow; boat moving towards you
- 3. Port Side; boat moving to the left
- 4. Stern; boat anchored, non-powered or moving away



KCB-0105

# Section 7

# **OPERATING THE BOAT**

Before operating the boat, review Safety in Section 2.

WARNING control of the boat:

Control Hazard: Certain actions can cause you to lose

- When accelerating the boat in the forward direction, the bow can rise and restrict visibility. Observe for obstacles and people before accelerating.
- The rotational thrust of the propeller under rapid acceleration can create high steering torque and rapidly change the direction of steering, causing loss of control.
- Do not trim the engine out too far or the boat may begin to "porpoise" (bounce up and down). Porpoising reduces control and visibility.
- If you lose control of the boat, pull back on the throttle and trim in at the same time.

# **BEFORE GETTING UNDERWAY**

# SAFETY EQUIPMENT

Federal and local laws require certain safety equipment to be on board at all times. Responsible boaters carry additional equipment in case of emergency.

# FLOAT PLAN

Complete a float plan before departure and leave it with a reliable person who is aware of your intentions while on the water. In case of emergency or if you do not return as planned, this information can be helpful to the USCG or others in rescuing or contacting you. There are several float plan apps that make it easy to fill out and email the plan. For more information on float plans or to download a float plan form, go to:

http://www.floatplancentral.cgaux.org

# SECTION **OPERATING THE BOAT**

# PRE-DEPARTURE SAFETY CHECKLIST

The following checks are essential to safe boating and must be performed before starting the engine or getting underway. Perform these checks every time you operate the boat so they become routine.

Never launch the boat or leave the safety of the dock if any problem is found during the pre-departure safety check. A problem could lead to an accident during the outing, causing severe injury or death. Have any problems corrected before proceeding:

- Check the current and forecasted weather reports, as well as wind and water conditions.
- Make sure the operator is qualified to operate the boat and does not use drugs or alcohol while at the helm.
- Make sure all required safety equipment is on board.
- Review the Boater's Checklist located next to the helm.
- Make all passengers aware of safety procedures and review the safety labels.
- File a float plan.
- Have all required documents on board.
- Have all maps or navigational charts for the intended destination on board.
- Be sure all passengers are properly seated.
- Be sure the boat is not overloaded.
- Check the engine emergency stop switch lanyard for proper installation and operation.
- Be sure the fire extinguisher is fully charged.
- Check bilge drain plugs for proper installation.
- Be sure all water has been pumped from the bilge area.
- Have plenty of emergency food and water on board.
- Check the bilge blower (if equipped) for proper operation, and be sure no fumes are present in the bilge area.
- Be sure all required equipment is on board (mooring lines, anchor lines, tool kit, etc.).
- Be sure you have enough fuel for the return trip.
- Check all compartments for fuel fumes.
- Check that no fuel, oil or water is leaking or has leaked into the bilge compartment.
- Check all hoses and connections for leakage and damage.
- Check the hull and propeller for damage.
- Check the engine cooling water intake pickup for blockage.

- Check that batteries are fully charged and the battery terminals are clean and tight.
- Check the electrical systems and navigation lights for proper operation.
- Be sure no person or obstacle is near the propeller.
- Check that the throttle/shift control is in the NEUTRAL position.
- Check the steering system for proper operation.
- Inspect the steering, throttle and shift cables for kinks, wear and interference with other components.
- Check that all required maintenance has been performed.

## **BOARDING**

Helpful guidelines when boarding a boat:

- Always step, rather than jump, into a boat.
- Be careful when wearing flip-flops.
- Avoid stepping on fiberglass or other potentially slippery surfaces.
- Always board one person at a time.
- Never board while carrying gear. Set the gear on the dock, board the boat and then pick up the gear.
- Never use the engine unit as a boarding ramp.
- It is courteous to always ask for permission to board so the owner/ operator is aware of your presence on the boat.
- Always face the boat when boarding/re-boarding using a ladder.


See the Using the Boarding Platform/Ladder section of this manual for re-boarding the boat from the water

# **BOAT LOADING**

The safety and performance of the boat depends on load, weight and the distribution of each.

The person/load capacity is determined by the USCG. A capacity plate is usually located within clear visibility of the boat operator or helm area. The capacity plate indicates limits for loading the boat, which are enforceable by law.





WARNING Sinking Hazard: NEVER exceed the USCG certified maximum capacities under any circumstances. Exceeding the limitations stated on the capacity plate can cause the boat to sink or the passengers and/or operator to drown, resulting in death or serious injury.

- Board passengers one at a time and distribute them equally to maintain equal buoyancy of the boat.
- Distribute weight equally from port to starboard and fore to aft. The shifting of weight may be required when underway to maintain an efficient trim position for optimum performance.
- Stow and secure all loose gear in stowage areas to prevent load shifting.
- Do not allow passengers to obstruct the captain's line of sight during operation.
- Do not stow gear on top of safety equipment; safety equipment must be quickly accessible.
- In adverse weather, reduce the load in the boat. Person and load capacity ratings are calculated for normal boating conditions.

# **FUELING**

#### FUEL MANAGEMENT

Use the "one-third" rule for fuel management. Use one-third of the fuel to reach your destination, one-third to return and one-third as reserve fuel.

#### FUEL SUPPLIERS

Refuel only at approved suppliers such as marina fuel docks or automotive fuel service stations. Approved suppliers have safeguards in place to lessen the likelihood of static discharge. Use only containers and funnels approved for use with the fuel type. See the Before Refueling section of this manual for additional information.

#### STATIC ELECTRICITY AND THE FUEL SYSTEM

The boat's built-in fuel tank has a bonding system that protects it from creating and discharging static electricity. The boat must be in contact with the water or on its trailer when refueling to complete the bonding system.

If the bonding system is not complete, an electrostatic spark may occur.

WARNING Fire/Explosion Hazard: An electrostatic spark can ignite fuel vapors, causing a fire and/or explosion.

Use extreme caution when filling the fuel system. In addition:

- Remove portable fuel tanks from the boat and place them on the ground to fill. The fuel tank must be properly grounded before refueling. If keeping portable tanks on board, store them only in a ventilated compartment. Never store them in an engine compartment or near heat/flame-producing accessories.
- Do not refuel a built-in fuel tank if the boat is suspended from a sling or another type of boat lift system. Suspending the boat from the water interrupts its bonding system. Using a portable fuel tank to refuel the boat while it is suspended may cause an electrostatic spark.

# **FUEL (GASOLINE)**

Fuel for marine gasoline-only engines must be carefully selected to avoid fines and possible catastrophic engine damage not covered under warranty. It is illegal for any person to tamper with emissions control devices such as the fuel system, and it is also illegal for any person to mis-fuel a marine gasoline-only engine with a blend of more than 10% ethanol.



While it is always preferable to use fuel that does not contain ethanol (usually labeled as "marine" or "recreational"), most marine engines are designed to tolerate E10 (10% maximum ethanol) fuel as long as the fuel meets the engine manufacturer's octane requirements. When using fuel containing ethanol, buy fuel in smaller quantities that will be consumed



KCB-0005

during the boating session with a 10% reserve. Fuel degrades quickly and the engine operates better on fresh fuel. Use marine fuel stabilizer to treat and reduce degradation of any remaining fuel.

Fuels that contain bio-isobutanol at any percentage are safe to use in marine products and have none of the limitations of ethanol biofuel additives.

Do not use octane boosters or other fuel additives except marine certified fuel stabilizer. Purchase fuel from a quality supplier selling high volumes to ensure the fuel is fresh. For more information go to: www.toptiergas.com/licensed-brands/

NOTICE Fuels that are blended to contain more than 10% ethanol may damage the engine, oil system or fuel system and should not be used in marine engines. Fuels that contain more than 10% ethanol can corrode metal parts, deteriorate rubber and plastic, or weaken gaskets. Damages caused by the use of fuels that contain more than 10% ethanol or fuels that do not meet engine manufacturer octane requirements are not covered by your warranty.

#### Gasoline Fuel in the U.S. Market

The majority of recreational boats are trailerable and often fueled at automobile gasoline filling stations. In the U.S. market, there are ever-increasing percentages of ethanol blended with gasoline with the most common being 10%. Since there is no standard for labeling gas pumps, it can be confusing to select the proper blend -LOOK BEFORE YOU PUMP!

Ethanol blends of more than 10% are tempting to use in your boat because they are cheaper. Ethanol blends of more than 10% are NOT meant for ANY outdoor power equipment and their illegal use will not only deteriorate rubber and plastic, causing an environmental hazard, but will cause permanent DAMAGE to the engine that is not covered by the Warranty - DO NOT BUY GAS BY PRICE!

	CONTAINS NO ETHANOL	UP TO 10% ETHANOL	UP TO 15% ETHANOL	UP TO 30% ETHANOL	UP TO 50% ETHANOL	UP TO 85% ETHANOL
OK for Boat Engines	Yes	Yes**	No	No	No	No
OK for Long- Term* Storage	Yes*	No	No	No	No	No
Covered by Engine Warranty	Yes	Yes	No	No	No	No
Illegal to Use in Boat Engines	No	No	Yes	Yes	Yes	Yes
Price	Most Expensive	About 5% less	About 10% less	About 20% less	About 30% less	Least Expensive

<sup>\* 3 – 6</sup> months with marine-grade fuel stabilizer added immediately

<sup>\*\*</sup> Not more than one month with marine certified marine-grade fuel stabilizer added immediately

# SECTION **OPERATING THE BOAT**


## BEFORE REFUELING

WARNING Fire/Explosion Hazard: Gasoline is extremely flammable and highly explosive under certain conditions. Be sure to check the fuel hoses and connectors for leaking and deterioration before fueling and on a monthly basis.

- Refuel the tanks only in a well-lighted area.
- Know where the fire extinguishers are.
- Stop all engines, motors, blowers and appliances before refueling.
- Do not smoke or allow open flames or sparks nearby, within 50 feet (15 meters), of the fueling area.
- If equipped, close all doors, windows, hatches and ports.
- Determine the amount of fuel required to fill the tanks. Do not overfill the fuel tanks. Allow for at least a 2% expansion of fuel when refueling. If the fuel temperature is 32°F (0°C) or lower, allow at least 6% for fuel expansion.

# RFFUFI ING

The fuel filler on boats with built-in tanks is usually located on the gunwale or aft area. The fuel tank is equipped with either a shutoff valve or antisiphon valve. The shutoff valve requires you to manually turn the fuel valve, while the antisiphon valve operates automatically. Because gasoline fumes are heavier than air, they will sink to the lowest part of



your boat, such as the bilge. Always evacuate fumes with the bilge blower (if equipped) before attempting to start the engine.

To prevent unwarranted engine damage, refer to the Engine Operator's Manual for recommended fuel and oil specifications.

CAUTION The fuel tank may be under pressure. Remove fuel filler cap slowly to release any pressure.



# REFUELING BUILT-IN FUEL TANKS

When refilling a permanent fuel tank from a land-based fuel nozzle with the boat out of the water, maintain contact between the fuel nozzle and the fill pipe at all times, before and during refueling, to prevent an electrostatic spark. If it's necessary to use a funnel, use a metal funnel. Do not use a plastic funnel. Do not fill built-in tanks from unapproved portable containers.

When refilling a permanent fuel tank from an approved portable fuel container with the boat in the water, a plastic funnel may be used.

NOTICE If the boat is unlikely to be used for two weeks or more, and you are using an ethanol-blended fuel, fill only the amount of fuel you need plus 10% as a safety factor. Unused ethanol-blended fuel deteriorates quickly.

#### AFTER REFUELING

- Close the fuel fill cap thoroughly.
- Wipe up any spilled fuel completely. Dispose of rags properly onshore.
- Open all doors, windows, hatches and ports to ventilate all spaces. Check for fuel vapors before starting any engines or appliances.
- If equipped, operate the blower for a minimum of four minutes before starting the engine.

## OUTBOARD ENGINE FUELING CONSIDERATIONS

If the boat is powered with an outboard engine, one or more of the following may also apply:

- Smaller two or four-stroke outboards may have a portable fuel tank. If so. the tank must be removed from the boat and placed on the ground to be filled. Fill portable fuel tanks onshore in the outdoors within an enclosed area.
- After refueling, install portable fuel tanks to the boat using straps or other fuel tank restraining system. Store portable fuel tanks in a well-ventilated area, away from heat and open flames. If equipped, close the filler cap vent screw.
- Two-stroke outboards mix oil with the fuel to be burned during combustion. During fueling and refilling on a two-stroke outboard, check the separate oil tank inside the boat or under the engine cover.
- Two-stroke outboard oil must meet the engine manufacturer's specification.

# **GETTING UNDERWAY**

The following basic boat maneuvering and operation principles do not cover all conditions or situations you may encounter during operation. It is important for you and anyone else operating the boat to have certified instruction before operating the boat.

Always advise all passengers on board of your steering, stopping and accelerating intentions. Brief passengers on:

- Obeying captain's orders
- Safety equipment location and operation
- Basic boat operation
- Radio operation
- Re-boarding procedure
- Man overboard procedure
- Emergency procedure
- Hazardous weather procedure
- Docking procedure
- Fueling procedure

Be sure all passengers are properly seated in designated seating positions and not riding on the bow, bow pulpit, deck, gunwale or rear sun deck while underway. Passengers must use caution when riding in the bow. Move to the aft passenger seats during rough water operation or if visibility is restricted. Check that any gates, dive doors or hydraulic beach doors are closed, and that platforms and boarding ladders are up and locked in position.

#### STARTING

The following information is intended as a basic guideline only and may not apply to your specific engine or controls. See the *Engine Operator's Manual* or control manufacturer's information for instructions on starting and operating the engine, adjustments and maintenance.

- Secure the boat to the dock before starting the engine.
- Check that the throttle is in the NEUTRAL position.
- Turn the battery selector switch to the appropriate ON position.
- Operate the bilge blower (if equipped) for four minutes or long enough to fully evacuate the engine and bilge compartments of explosive fumes.



WARNING Fire/Explosion Hazard: If equipped with a bilge blower switch, always operate the bilge blower for a minimum of 4 minutes prior to starting the engine. Gasoline vapors can explode, resulting in injury or death.

- Check the bilge for fuel vapors.
- Verify that the blower is operating properly.
- Always run the blower when the boat is operating below cruising speed.
- Attach the engine emergency stop switch lanyard to the boat operator.
- Check that all passengers are seated properly.
- Position the lower drive power trim to the full DOWN position.
- Start the engine.

#### STFFRING

WARNING Control Hazard: If the engine is shut off (no thrust), you will have no steering control, and the boat's momentum will cause it to move forward even though the engine has stopped. Even at low engine speeds where thrust is reduced, a loss of steering control can occur.

Steering a boat is very different from steering an automobile. Steering and maneuvering a boat is far more difficult and requires time and practice to master.


When steering a boat, it is important to understand the causes and effects of turning. Since both thrust and steering are at the stern of the boat, the stern will push away from the direction the steering wheel (helm) or tiller arm is turned. The boat seems to skid across the water while turning, which feels very different from an automobile making a turn.

Steering in reverse has its own challenges. Practice forward and reverse steering to gain comfort and to feel in control of the boat in any steering situation.

Be prepared for wind and current while steering the boat. Steering in wind or water currents is difficult and requires skill to be able to anticipate and compensate for these effects.

Pontoon boats pose an additional challenge during slow-speed maneuvering in breezy conditions. The combination of light weight and high side-surface area can produce a "sail" effect that pushes the boat around, making docking especially tricky at times. If you feel the boat being pushed adversely when approaching the dock, it may be necessary to "abort" the maneuver and circle around for a different approach.



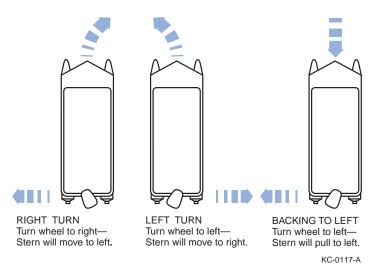

Rotational thrust of the propeller is an aspect most single propeller-driven boats share and needs to be compensated for at slow speeds. During rotational thrust, torque is transmitted to the helm and may cause the boat to drift either port or starboard when moving forward at a slow speed. Rotational thrust usually goes unnoticed at high speeds. While moving forward at a slow speed, constant helm corrections are usually necessary to maintain a straight course.

Twin-engine and dual-prop boats usually compensate for rotational thrust of the propellers by using one counterrotating drive with a counterrotating propeller, and one standard clockwise-rotating drive and propeller to reduce the effects of steering torque at all boat speeds.

## SHIFTING

The following information is a basic guideline only and may not apply to the specific shift control. See the *Engine Operator's Manual* or control manufacturer's information for the shift control operation, adjustment and maintenance.

- Most side-mounted throttle and shift controls have a neutral detent lock that must be released before shifting from NEUTRAL.
- Always use a brisk and decisive movement when shifting into or out of gear.
- Always pause in NEUTRAL before shifting from FORWARD to REVERSE, or REVERSE to FORWARD. Most throttle and shift controls have a detent position for NEUTRAL, FORWARD and REVERSE engagement positions. These detent positions are important; when shifting into and out of gear, always pause in these positions.

- Never shift into REVERSE while your boat is in FORWARD gear when traveling at any speed above idle.
- Always keep the shift control clean and clear of obstructions.

#### **STOPPING**

Reverse thrust is commonly used to slow and stop a boat. The amount of reverse thrust needed to stop will vary due to boat design, load and speed.

WARNING Control Hazard: Always reduce engine speed to idle and pause in NEUTRAL before shifting from FORWARD to REVERSE or REVERSE to FORWARD. Abrupt stopping and steering loss can occur if the propulsion unit is shifted quickly from FORWARD to REVERSE or REVERSE to FORWARD. Never shift into REVERSE at planing or high forward speeds.

A boat does not have brakes. Controlling the boat to a stop and while stopped are important skills that must be learned. Reverse thrust is commonly used to slow and stop a boat. The continued momentum of a boat will vary according to the boat design, load and speed. You must also consider and learn to compensate for the effects of wind and current. Stopping in wind or water currents is difficult and requires skill to be able to anticipate and compensate for these effects.

To stop or slow forward motion, always gradually return the throttle(s) to the slow IDLE position, pause and shift into NEUTRAL, then pause and shift into REVERSE.

WARNING Control Hazard: Gradually return the throttle(s) to the slow IDLE position. Failure to do so can cause loss of boat control and engine propulsion system damage.

- If the boat has been driven for a long period of time at high speed, allow the engine a two- to three-minute cool-down period at low idle in NFUTRAL.
- Turn the ignition key to the OFF position.

NOTICE Never pull the lanyard from the engine emergency stop switch for normal shutdown. Doing so may impair your ability to restart the engine quickly.

Avoid collisions; at high speeds the boat will require more time and distance to stop or slow.

- The proper use of trim tabs and outdrive trim angle is important when slowing to a stop.
- If you are new to boating or before your first outing of the season, practice slowing and stopping in open water. Seek on-water training if needed.

#### ACCELERATING AND RUNNING UNDERWAY

You must understand the boat's equipment and controls in order to drive and control the boat in a forward direction at all speeds and in all conditions. Learning to drive and control the boat can be challenging; take this matter seriously and spend plenty of time practicing.

The phrase "on plane" is commonly used when referring to the running angle of a boat in forward motion. When a boat is "on plane," its hull is usually running level or almost level with the water's surface, which is considered level. The level "plane" of the water's surface is the most efficient angle to run in. This basically means that the boat is running on top of the water and not plowing through it.

Some pontoon boats with low horsepower engines and/or heavy loads may not be able to reach "plane."

Factors to consider when accelerating a boat forward and running at the most efficient planing angle are:

- Boat design
- Hull type and condition
- Boat load and distribution of weight
- Engine capability and condition
- Propeller type, size and condition
- Outdrive and boat power trim equipment and condition

Because all boats are different and vary in design, purpose and load, planing angles and characteristics will vary among all boats. Become familiar with the boat's characteristics and obtain qualified assistance.

The following guidelines provide a basic understanding of forward acceleration and operating on plane while underway:

- Always look in front of and around you before proceeding. Avoid collisions before accelerating; be aware and stay clear of people and obstacles in the water.
- Always advise all passengers on board of your intention to accelerate and get underway.
- Stow and fasten all loose gear.





- Make sure the engine emergency stop switch lanyard is connected to the operator.
- If equipped, adjust the boat trim tabs up or to a neutral position with the hull.
- If equipped, adjust the engine power trim to the full-in position.
- Shift from NEUTRAL into FORWARD detent idle position.
- Adjust steering to the direction of travel.
- Using a controlled and constant motion, move the throttle control forward.

WARNING Control Hazard: When accelerating forward, the bow can rise and restrict visibility. Never remove your hand from the steering wheel. The rotational thrust of the propeller under rapid acceleration can create high steering torque and rapidly change the direction of steering, causing loss of control.

- As the boat begins to move, the bow will rise and the boat will tend to plow through the water. As acceleration increases, the boat will begin to plane or level out within a few seconds. If it will not plane to a near-level position and has sufficient horsepower, slowly reduce the throttle back to the FORWARD detent idle position. Recheck the load distribution and trim equipment position to determine the cause.
- Once the boat is on plane, the steering torque will diminish; however, never remove your hands from the helm while underway. While running at a planed position, you will notice greater throttle response and steering control as you continue to accelerate or achieve the most comfortable and safe speed for the conditions. You can achieve better performance, control and running efficiency using the engine's power trim and the boat's trim tabs, if equipped.
- Be aware of the wake you create and anticipate the effect it will have on others. During acceleration, deceleration and at speeds other than on plane, a heavy wake is usually created. You are responsible for the boat's wake and any damage or injury it causes.
- Obey no-wake areas and speed-controlled areas.
- Stay clear of or at a safe distance from other boats.
- Avoid collisions; at high speeds the boat will require more time and distance to stop or slow.

### CHECKS AFTER OPERATION

- Check gauges frequently for signs of abnormal conditions.
- Check that controls operate smoothly.
- Check for excessive vibration.

# TRIM AND TILT

The following information is a basic guideline only and may not apply to your specific power tilt unit. See the *Engine Operator's Manual* for information on your power tilt operation, adjustment and maintenance.

The engine's power tilt generally operates in conjunction with the power trim system, which is commonly called power trim and tilt. This system allows you to raise and lower the lower drive unit and propeller to adjust trim (the planing and running angle of the boat while underway) and tilt (used to position the lower drive unit up beyond the power trim range used for trailering, launching or beaching). Never use power tilt while the engine is running.


## **POWER TRIM**

The following information is a basic guideline only and may not apply to your specific power trim unit. See the *Engine Operator's Manual* for information on your power trim operation, adjustment and maintenance.

The engine's power trim allows you to raise and lower the lower drive unit and propeller to adjust the planing and running angle of the boat while underway.

Boat trim adjustment while underway greatly affects boat performance and efficiency. During normal operation while underway at speed, trim the boat to the best possible position to reduce the wetted surface of the hull. With less boat in the water, both speed and fuel economy increase. Adjust systems with manual trim adjustment for best overall operation for the load and conditions. Engines with power trim allow for continuous adjustment for best results.

Adjust the power trim by using a switch at the helm area or on the throttle control. Trim gauges are available in most applications to provide a visual gauge-to-trim position. Most gauges indicate trim position between UP (out, away from the transom) and DOWN (in, closer to the transom).



KC-0123C-A

#### General effects of power trim underway:

Trim in too far (closer to the transom) can be dangerous:

- At high speed or high throttle, the boat may "bow steer." Bow steering can be violent and dangerous.
- Speed decreases.
- Fuel economy decreases.
- Boat will have difficulty achieving a proper running, planing position.

### Trim out too far (away from the transom):

- Steering torque increases.
- Speed decreases.
- Fuel economy decreases.
- Boat may handle and steer poorly.
- Boat will bounce or porpoise.
- Engine RPM increases.
- Propeller may ventilate as it nears the surface of the water and slip excessively as it pulls air from the surface. This will cause engine RPM to rapidly rise.
- Boat will have difficulty getting on plane from an idle position.

! WARNING Control Hazard: Do not trim the engine out too far or you may lose control of the boat. If you lose control of the boat, pull back on the throttle and trim in at the same time.

See the Operating the Boat section of this manual for more details.

#### General power trim operation guidelines:

- When getting on plane from an idle position, start with the trim full in. As
  the throttle position increases, the boat speed will increase and drive the
  bow up. As acceleration proceeds, the bow will start to come down. When
  the bow starts to fall and the boat begins to plane, slowly start to trim out.
- Trimming out while underway generally causes the boat to rise up and plane. The boat begins accelerating without adjusting the throttle as less of the boat is dragging in the water. Trimming up causes the engine RPM to increase. It is very important to watch the engine tachometer to keep it at or near full throttle operating range and not to exceed the engine's wide-open throttle operation range. See the Engine Operator's Manual for the engine's wide-open throttle operation range.
- For optimum trim position, trim out until the prop starts to slip or porpoising occurs. Then trim back in until those symptoms go away. Mild excessive trim-out is a good way to gauge proper trim for your pontoon.

! WARNING Control Hazard: At speed, do not trim in too far. "Bow Steering" (a condition where the bow bites hard into a turn and the stern of the boat violently spins out) may occur when at high speed or under hard throttle.

High-speed operation on smooth water provides stability, but you must maintain control by using quick reactions and adjustments. Know your limits and stay within them. Keep one hand on the steering wheel and the other on the throttle controls at all times.

! WARNING Control Hazard: If you lose control of the boat, pull back on the throttle and trim in at the same time.

Constant adjustments are necessary for rapidly changing conditions. Small inputs of throttle and steering are exaggerated at high speeds. Depending on the speed, keep watch well ahead so that you have enough time to react.

NOTE — Godfrey bow rider and twin-engine boats often run at half-to-full trim-out. Full trim-in may not be needed on these models.

# PERFORMANCE OPERATION

Pontoon boats with triple pontoons and deck boats often have high horsepower engines, or twin engines for increased performance. Operators of these boats must exercise additional caution when turning or operating in rough water at high speeds. Practice operation by yourself in open water by gradually increasing speed so you get a feel for the operating characteristics of the boat. Do not take passengers until you are confident of your operating abilities. Inform passengers of your intentions, require they wear a life jacket, sit in designated seats and use any available handholds. Do not make sharp turns or operate too fast for conditions.

# DOCKING

Practice leaving and approaching the dock to become familiar with the procedures.

#### Helpful guidelines when departing from the dock:

- Make sure you have sufficient space to maneuver the boat away from the dock, other boats and any other obstacles that may hinder your departure.
- Always allow sufficient clearance to the stern for the engine to clear any obstructions.
- Be aware of other boat traffic, wind and water conditions before departing.
- Make sure the engine is started and you have boat movement under control before casting off any mooring lines.
- Always proceed slowly when departing from a dock.


#### Helpful guidelines when docking:

- Make sure you have sufficient space to maneuver your boat around the dock, other boats and any other obstacles that may hinder your approach.
- Be aware of other boat traffic, wind and water conditions on your approach.
- Approach from a direction against the wind or current.
- When possible, approach slowly from a 45-degree angle and then steer parallel to the dock.
- Have fenders, dock lines and assistance ready.
- If your boat has limited visibility from the helm, handheld communicators can be helpful.

Pontoon boats pose an additional challenge during slow-speed maneuvering in breezy conditions. The combination of light weight and high side-surface area can produce a "sail" effect that pushes the boat around, making docking especially tricky at times. If you feel the boat being pushed adversely when approaching the dock, it may be necessary to "abort" the maneuver and circle around for a different approach.

WARNING Personal Injury Hazard: Never use your hand, arm or any other part of your body to attempt to keep the boat from hitting the dock. The boat could push against the dock, causing severe injury.

- If possible, throw a mooring line to a person on the dock and have that person secure the bow. With the bow secure, swing the stern in with the engine or pull it in using a boat hook or the stern line.
- Tie off the bow and then the stern.
- Use bow and stern dock lines, as well as spring lines, for additional security.
- Use fenders to protect the boat from damage.
- Never attach a dock line to a point or part of the boat that is not designed to withstand the stress and the weight of the boat.
- If planning on docking the boat for a long period of time, use chafing protectors on the lines to protect the boat's finish.
- Leave some slack in the lines to allow for wave movement or tidal action if applicable.

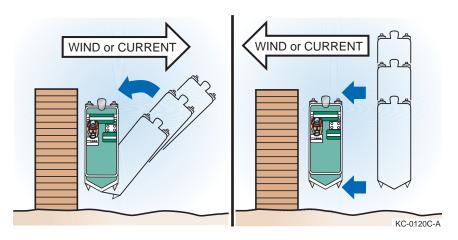

# **MOORING**

Because mooring configurations vary, consult with other experienced boaters or the boat dealer for recommendations on properly mooring the boat. Always moor the boat securely to prevent personal injury or property damage.


#### Helpful guidelines when mooring:

- Each mooring line must be of the appropriate strength, material and type to safely secure your boat when moored.
- Each mooring line must be longer than the length of the boat.
- Use bow and stern mooring lines, as well as spring lines, for additional security.
- Use fenders to protect the boat from damage.
- When possible, tie up with the bow facing into the wind or current.
- Never attach a mooring line to a point or part of your boat that is not designed to withstand the stress and the weight of the boat.
- Only use the bow eye, stern eyes and other cleats or attachment points that have been approved for mooring. Designated strong points should be used whenever possible.
- If you plan on mooring the boat for a long period of time, use chafing protectors on lines to protect the boat's finish.
- Leave some slack in the lines to allow for wave movement or tidal action if applicable.


## **COVERING**

Use of a mooring cover is highly recommended when the boat is not in use to prevent UV sun damage, mold, mildew, and damage from bird droppings. Depending on your model, there are small variations in covers and two primary styles - a full-deck cover or a cover specifically for the passenger area.

### **Mooring Cover**

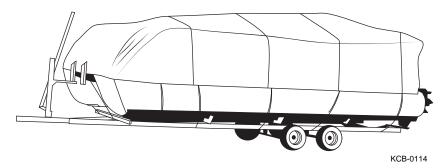


#### **Playpen Cover**

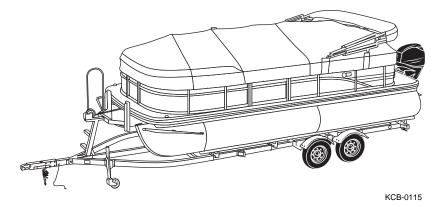

When removing the cover, grasp the material on both sides of the snap and pull it away from the boat slowly to prevent damaging the cover material. If the snaps are difficult to remove, apply a coating of paraffin wax before installing the cover again.

## Canopy Sun Tops

Boats equipped with a canopy sun top that folds down have a protective boot for use in the DOWN position. The canopy sun top's main purpose is protection from the sun. It will not protect against wind or rain. Lower the top if you are operating at higher speeds, especially on windy days to prevent damage to the top.



KCB-0112

#### To Raise the Canopy Sun Top:

- 1. Remove the protective boot.
- 2. Loosen the canopy straps if wrapped to the frame.
- 3. Take a firm hold of the front of the canopy frame and slowly lift it upwards.
- 4. Hook the canopy straps to the railing eyelets.
- 5. Adjust tension if needed.


# To Lower the Canopy Sun Top:

NOTICE

The canopy must be thoroughly dry before storing it in the

boot.

- 1. Release the strap tension.
- 2. Unhook the canopy straps from the railing eyelets.
- 3. Lower the frame slowly while carefully folding the fabric.
- 4. Secure the canopy straps by wrapping them around the frame and fastening the hooks to the eyelets.
- 5. Replace the protective boot, ensuring that the stern light goes through the opening at the top.



NOTICE Always store the canopy top for traveling if trailering the boat. Failure to do so could cause damage.

## **CABANA ENCLOSURES**

Some models may be equipped with an optional cabana enclosure. The cabana is designed as a sleeper curtain, but it will also provide some protection from the elements. Although the fabric is water-resistant, rainwater can enter at seams. A tent fabric seam sealer is recommended for further protection. Cabana enclosures can be retrofitted to most models; consult your dealer.






# ANCHORS AND ANCHORING

Anchors are available for various applications and come in many sizes, types and shapes. Boat weight and size are primary factors in choosing an anchor. When selecting an anchor, consult other qualified boaters familiar with waters or the boat dealer.

Anchor line is constructed from various materials and is available in many diameters and types; larger craft use chain instead of line. The anchor rode for recreational boats consists of the anchor line connected to a length of chain attached to the anchor. Consult with the boat dealer for a recommendation on appropriate lines for the boat anchor and application.



For most applications, anchor line length should be at least six to seven times longer than the depth of the water in which you are anchoring. Always have plenty of additional anchor line on board. If anchoring in tidal waters, consider a rode chain about the length of the boat and increase the total anchor line length to ten times the depth of the water at low tide.



WARNING Sinking Hazard: In waters with strong currents, always anchor from the bow and do not add an anchor at the stern. A small amount of current will make a boat unsteady. A strong current can pull a boat anchored by the stern under the water and keep it there.

WARNING Collision Hazard: ALWAYS anchor in areas where the boat will not disrupt other boats. Do not anchor in a channel or tie up to any navigation aid. It is dangerous and illegal.

#### Helpful guidelines when anchoring:

- Make sure the anchor line is tied to the anchor. Tie the other end of the line to the forward cleat or bow eye.
- Head the boat into the wind or current over the spot where you want to lower the anchor.
- Stop the boat before lowering the anchor.

- Scan the shoreline for signs of underwater cables or pipes and avoid these
  areas.
- Slowly lower the anchor until it hits bottom.
- Allow the boat to back away, keeping tension on the line.
- Release at least six to seven times as much line as the depth of the water.
- Secure the anchor line to a designated strong point, typically the bow eye
  or dedicated anchor bit.
- Firmly pull on the line to make sure the anchor is holding.
- Occasionally check your position against the shoreline. If the anchor is dragging and the boat is drifting, reset the anchor.

#### Helpful guidelines when weighing (pulling in) the anchor:

- Start the engine(s).
- If necessary, move forward until enough tension is off the anchor line to allow for retrieval of the anchor. Avoid running over the anchor line; retrieve the line as you approach the anchor.
- Once the anchor line is straight up and down, lift the anchor from the bottom.
- If the anchor is stuck, attach the anchor line to the bow cleat so it is tight.
  The up-and-down motion of the bow from wave action may loosen the
  anchor from the bottom. If the anchor remains stuck, let out a few more
  feet of line and attach it to the bow cleat. While keeping tension on the
  line, slowly maneuver your boat around the anchor to help loosen it. Avoid
  running over the anchor line.
- Always stow and secure the anchor and line before departing.

# **LINES AND KNOTS**


Mooring, anchor and other nautical lines are constructed from many different types of materials, and are available in many diameters and styles. Consult with your local marine supply store for a recommendation of appropriate lines for the boat and application. Commonly used mooring lines are constructed of a high-quality synthetic material in a double-braided configuration and usually have eye splices on at least one end.

Learn and become familiar with tying and using knots. Knowing how to use knots and lines properly can prevent personal injury and property damage.

Practice tying lines to docks, cleats and anchors, and connecting two lines together. Consult other qualified boaters or the boat dealer, or visit the local bookstore, library or the Internet for information on the proper use of nautical lines and knots. The following illustrations represent a few examples of securing mooring lines.












Cleating an open line

Cleating an eye-spliced line

Securing to a dock bitt





Securing load line (clove hitch)

A "double half hitch" should always accompany a "clove hitch" on the load line.

Securing load line (double half hitch)

KCB-0010



This Page Intentionally Left Blank

# Section 8

# TRAILERING AND LAUNCHING

Before using the trailer, review Safety in Section 2.

#### LEGAL CONSIDERATIONS

The following information is intended as a basic guideline only. See the Trailer Operator's Manual for information on operation, adjustments and maintenance.

Before using the trailer, contact your state's Department of Motor Vehicles (and that of other states through which you may be traveling) for information on trailering regulations. Trailer regulations vary widely from state to state, and it is your responsibility to be in compliance with all regulations when trailering the boat.

Regulations include, but are not limited to, trailer registration, licensing, width, height, length, lights, safety chains, tie-downs, hitch type, weight capacity, brakes, spare wheels, vehicle mirrors and gross vehicle weight.

### TRAILER CLASSIFICATION

Trailers are separated into four classes based on the Gross Vehicle Weight Rating (GVWR):

TRAILER CLASS	GVWR	
Class One	under 2000 lb (907 kg)	
Class Two	over 2000 lb (907 kg) and under 3500 lb (1588 kg)	
Class Three	over 3500 lb (1588 kg) and under 5000 lb (2268 kg)	
Class Four	over 5000 lb (2268 kg)	

## TRAILER TYPE

Trailers are designed for many applications and can vary in style. To prevent damage to the boat and/or personal injury, always use the appropriate trailer for proper support of the boat. To avoid corrosion in saltwater applications, do not use carpeted bunks on lifts and/or trailers. Carpeted bunks become saturated with saltwater and will corrode raw aluminum pontoon tubes. Contact the dealer for more information.



## TRAILER GROSS VEHICLE WEIGHT RATING

All trailers must display a Gross Vehicle Weight Rating (GVWR) decal, which shows the load-carrying capacity plus the weight of the trailer. The total weight of the boat (fully loaded with fuel, batteries, water, etc.), engine, gear and trailer must never exceed the GVWR.

#### TOWING VEHICLE

The towing vehicle must be able to safely pull the full trailer and boat load. Never pull a trailer load that exceeds the vehicle's towing capacity; you risk losing control of the trailer and/or vehicle. Before trailering, always check the Vehicle Operator's Manual for maximum towing/trailering load specifications and maximum gross vehicle weight specifications that include the fully loaded trailer.

## **VEHICLE TOWING HITCH**


The towing vehicle must be able to safely pull the full trailer and boat load. The vehicle must have a towing hitch that is capable of safely handling the trailering load and tongue weight of the trailer.

Hitches are designed for many applications and can vary in style. Use professional assistance when selecting the correct hitch and hitch ball for the towing application.

WARNING Control Hazard: A vehicle hitch that is underrated or improperly installed can lead to loss of control of the trailer and/or vehicle. Never use a hitch that is not rated to pull the maximum weight of the trailering load or that is not rated for the maximum tongue weight that the trailering load applies.

Hitches are divided into classes that specify the trailer's gross trailer weight and maximum tongue weight for each class.

#### MAXIMUM TONGUE WEIGHT

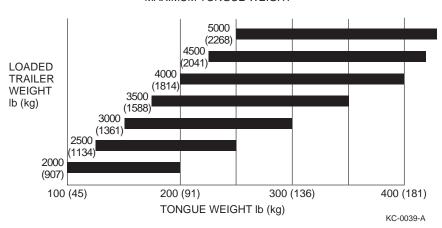


## HITCH BALL AND TRAILER COUPLER

Most boat trailers have a coupler that connects to a hitch ball attached to the towing vehicle's hitch. The trailer hitch coupler must always match the size of the hitch ball. The correct hitch ball diameter for the coupler is usually marked on the trailer coupler.

**↑** WARNING

VARINING Control Hazard:
Never use a hitch ball size or rating
that does not match the trailer coupler
specifications. Using an improper size
or rated hitch ball can lead to loss of
control of the trailer and/or vehicle.






Trailer hitch balls are sized and rated for use based on the trailer GVWR:

TRAILER CLASS	GVWR	HITCH BALL DIAMETER SIZE
Class One	under 2000 lb (907 kg)	1-7/8 in. diameter size
Class Two	over 2000 lb (907 kg) and under 3500 lb (1588 kg)	2 in. diameter size
Class Three	over 3500 lb (1588 kg) and under 5000 lb (2268 kg)	2 in. diameter size
Class Four	over 5000 lb (2268 kg)	2-5/16 in. diameter size

## **SAFETY CHAINS**

The boat trailer's safety chains prevent the trailer from completely detaching from the towing vehicle when underway. Connect the chains to the vehicle's hitch or frame and crisscross the chains under the trailer tongue to prevent the tongue from dropping to the road if the trailer separates from the hitch ball. Rig the chains as tight as possible with enough slack to permit full-free turning.



Safety chains must be rated at the same or greater weight capacity as the trailer's GVWR.


Never allow the chains to drag on the ground when trailering.

Attach the chains properly and securely between the towing vehicle and trailer before trailering.

## TRAILER BRAKES

In some states, any trailer with a GVWR of 1500 lb (680 kg) or more is required to have trailer brakes. Check with your state and local authorities for more information.

The three basic types of trailer brakes are electric. hydraulic surge and airactuated. If the trailer is equipped with brakes, see the Trailer Operator's Manual for more information on operation, adjustments and maintenance.



### 5-PIN WIRING CONNECTOR

Some trailers equipped with surge brakes may utilize a 5-pin wiring connector. These trailers use an electric solenoid valve that allows brake fluid to bypass back to the reservoir while in REVERSE. The solenoid is usually connected to the reverse lights on the tow vehicle to ensure the brakes only bypass in REVERSE. The fifth pin is for deactivating the brakes when backing up, and is required to be connected to the vehicle's power when backing up.

## TRANSOM SAVER

If your trailer is not equipped with a device to hold the outboard lower unit in the tilt position, sometimes called a transom saver, we recommend adding one. Trailering the boat on rough roads can add a great amount of stress from bouncing on the transom and engine trim and tilt hydraulics.

NOTICE Damage caused from bouncing is not covered by the boat or engine warranty. There are many styles of these devices; your dealer can help you find one for your application.

## TRAILERING GUIDELINES


### **ENGINE-TRANSOM SUPPORT BRACKET**

The trailer must be equipped with an engine-transom support bracket for each engine. The support must transfer the weight of the engine to the trailer crossmember. Devices that are used between the engine and engine transom bracket do not provide adequate protection. Damage to the transom motor pod, engine and trailer from shock loads is not covered by the boat, engine or trailer warranties.

#### Follow these guidelines when trailering:


- Before driving, make sure the vehicle maintenance and trailer maintenance are current. This is very important because towing puts additional stress on the tow vehicle.
- Make sure the wheel lug nuts/ bolts on the tow vehicle and trailer are tightened to the correct torque.
- Be sure the hitch, coupler, draw bar and other equipment that connect the trailer and the tow vehicle are properly secure
  - tow vehicle are properly secured and adjusted.

    Make sure all running lights, brake lights, turn signals and hazari






- Maintain a safe speed as regulated by the trailering laws of the state where you are traveling.
- Check the trailer and vehicle brakes for proper operation and fluid level prior to departure.
- Check the trailer for damage prior to departure.
- Make sure the hitch ball and trailer coupler are the same size and bolts and nuts are tightly secured.
- The coupler must be completely over the ball, and the latching mechanism must be locked down.
- Make sure the safety chains are properly crisscrossed and connected.
  They should not touch the road but should have enough slack to make
  turns. If the ball were to break, the trailer would follow in a straight line and
  prevent the coupler from dragging on the road. Make sure the trailer
  emergency brake cable or chain is also installed to the tow vehicle frame.





Ensure the breakaway system lanyard is connected to the tow vehicle and not to the safety chains or ball mount.

NOTE — Make sure the towing vehicle and trailer are in compliance with all state and local laws. Contact your state motor vehicle bureau for laws governing the towing of trailers.

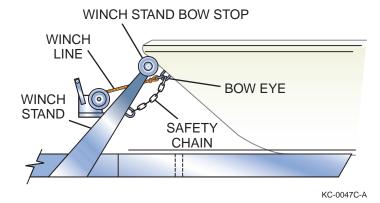


- Once the trailer is secured to the vehicle hitch, stow the trailer jack or lift so that it will not hit the ground.
- Check and correct tire pressure on the tow vehicle and trailer, including the spare tire. Under-inflated tires heat up rapidly and may cause tire damage or failure. The proper tire pressure is listed on the trailer certification plate.
- Check trailer wheel bearings before each trip.
- Secure the stern of the boat to the trailer from the stern eyes.
- Fasten the bow of the boat to the trailer with the bow winch line connected to the bow eye and bow safety chains.
- If travel conditions require, use an additional tie-down strap across the rear of your boat from side to side to further secure the stern.
- Check all strapping material for wear.
- Check that the wiring is properly connected. It should not touch the road but should be loose enough to make turns without disconnecting or damaging the wires.
- Too much or too little tongue weight makes steering difficult and causes the tow vehicle to sway. Put approximately 5% to 10% of boat and trailer weight on the tongue.



- Drive with the vehicle and trailer running lights on.
- Check load distribution to make sure the tow vehicle and trailer are properly balanced front to back and side to side.
- Check that all items are securely fastened on and in the trailer.
- Be sure the trailer jack, tongue support and any attached stabilizers are raised and locked in place.
- Check side-view mirrors and rearview mirrors for good visibility.
- Check routes and restrictions on bridges and tunnels.
- Keep wheel chocks and jack stands on hand.
- Side curtains, backdrop, aft curtains, convertible tops and detachable windshields are not designed to stay on boats at highway speeds. Before towing, take down the convertible top, side curtains, back cover and detachable windshield, if equipped.
- Be sure the canopy support arms are properly adjusted all the way down when trailering the boat. Before trailering, be sure the canopy has been properly stored in the trailering position or removed. Failure to properly store the canopy during trailering and any resulting damage to the canopy and/or boat may not be covered by warranty.
- Remove any covers that are not designed to stay on boats at highway speeds.



- Carry a spare tire and wheel for both the trailer and the towing vehicle, along with tools to change them.
- See the Engine Operator's Manual for engine-related trailering information. Continuous road shocks may fatique the boat's steering system.
- Tie outboard motors in place so they will not tilt or turn from road shock.
- On extended trips, carry spare wheel bearings, seals and races.
- While traveling, check the wheel hubs every time you stop. If the hub feels abnormally hot, inspect the bearing before continuing your trip.



KC-0291C-A

- Carry a fire extinguisher in the vehicle.
- Turn carefully while towing a trailer; additional space and distance are needed.
- Drive slowly over railroad tracks or rough roads.
- While trailering the boat from lake to lake, boaters may unknowingly introduce a foreign aquatic species from one lake to the next. Thoroughly clean the boat below the waterline, remove all weeds and algae and drain the bilge and livewells before launching it in a new body of water.

## PONTOON BOAT CONSIDERATIONS

Because of the boat and trailer designs, pontoon boats require additional considerations when towed on the roadway.

- Be sure the trailer meets your needs. Scissors-type trailers are best for limited travel or shallow water load/unload, drive-on trailers are best for driving extended distances. If you have a tri-pontoon boat, the center pontoon must be supported by the trailer if tied to the engine mount.
- The trailer must be equipped with an engine-transom support bracket for each engine. For pontoon boats, the support must transfer the weight of the engine to the trailer cross-member. Devices that are used between the engine and engine transom bracket do not provide adequate protection. Damage to the transom motor pod, engine, and trailer from shock loads is not covered by the warranty.



- If your pontoon boat has twin engines, do not use a scissors-type trailer.
- Scissors-type pontoon boat trailers have narrow axles (tires inside the
  pontoons) and are inherently less stable. Use extra precaution with turns
  and lane changes, and use additional tie-downs to prevent boat
  movement.
- If you have a drive-on style trailer and use your pontoon boat in salt, brackish or polluted waters, you must apply a suitable bottom paint to all areas of the pontoon submerged in water. Also, flush the trailer bunks with fresh water as soon as possible after loading the boat to minimize corrosion damage.
- If a pontoon has been damaged and contains water, drain the water before trailering. Remove the boat from the water and allow it to drain completely before traveling on the road. If the pontoon is not equipped with a drain plug, consider drilling a small hole (no larger than 7/16" for easy repair) in the bottom of the pontoon and allow water to drain; consult your dealer or certified aluminum welder for repair.
- Keep trailering speeds under 45 mph (72 kph) and be mindful of traffic behind you. Common courtesy calls for you to safely pull over and let any traffic that might stack up behind you to pass from time to time.
- If you are passing, keep in mind the added length of the tow vehicle and boat, and allow enough room to smoothly merge back into the lane.
   Sudden lane changes could cause the trailer to weave and become unstable.
- If a truck or large vehicle passes you, be aware that the wind turbulence may push the trailer. The trailer will stabilize itself after the vehicle passes. Do not brake to adjust.
- Always close and lower the convertible top using the trailering struts if equipped and secure them.

**! WARNING** Highway Towing Hazard: Pontoon boats require special attention when towing on roads:

- Do not tow faster than 45 mph (72 kph). The combination of being light in the bow and the outboard leveraged on the motor pod may not give sufficient tongue weight to prevent trailer sway.
- Allow increased distance between vehicles of at least two lengths per every 10 mph (16 kph) to improve reaction time and safe stopping distance in case of emergency.
- Know the overall height of the boat on the trailer and add 8 in. (203 mm) as a safety factor. Avoid overhead obstacles on the route that may not allow enough clearance such as filling stations, drive-thru's, and rural bridges.

Improper towing could result in death or serious injury.

## TRAILER TOWING TACTICS

If you are new to trailer towing there is nothing that will do you more good than extensive practice. Find a shopping mall parking lot before opening time and practice the several maneuvers we will be discussing. What is difficult initially will be easier as you develop your skills.

WARNING Highway Towing Hazard: Pontoon boats require special attention when towing on roads:

- Do not tow faster than 45 mph (72 kph). The combination of being light in the bow and the outboard leveraged on the motor pod may not give sufficient tongue weight to prevent trailer sway.
- Allow increased distance between vehicles of at least two lengths per every 10 mph (16 kph) to improve reaction time and safe stopping distance in case of emergency.
- Know the overall height of the boat on the trailer and add 8 in. (203 mm) as a safety factor. Avoid overhead obstacles on the route that may not allow enough clearance such as filling stations, drive-thrus, and rural bridges.

#### Improper towing could result in death or serious injury.

The nature of pontoon boats makes it imperative that the 45 mph (72 kph) speed not be exceeded. By doing so you may cause the trailer to sway and lose control of the tow vehicle.

#### Steering in Curves and Corners

On curves, steer well to your side of the centerline, as the trailer does not track in the path of the tow vehicle's wheels. When turning corners, steer wide so the trailer clears the curb.

#### Passing

Be mindful that the added weight of your boat and trailer reduces the acceleration of your tow vehicle. Be sure and allow plenty of room to complete your pass. After passing a vehicle allow plenty of room to clear passed vehicle before turning back into the driving lane. Sharp turns can cause trailers to weave and become unstable.



#### Being Passed

! WARNING Highway Towing Hazard: Allow proper distance between vehicles to safely stop in case of an emergency.

Large trucks and buses can cause wind turbulence that can force the trailer to the right. The trailer will stabilize itself after the vehicle passes. Do not brake to adjust. Common courtesy calls for you to pull over and let any traffic that might stack up behind you to pass from time to time.

#### **Stopping**


Be mindful of the extra weight your boat and trailer put on your tow vehicle and the increased distance needed to stop. Even with surge brakes on the trailer, this distance is increased.

### **BACKING UP**

If you have never towed a trailer before, take time to practice and become comfortable with backing up the boat and trailer. Situations can arise in traffic, or when launching, that will require you to be able to back up the trailer safely.

Follow these guidelines when backing a trailer:

- Back slowly and make small steering adjustments.
- Turn the car wheels in the direction opposite where you want the trailer to go.
- After the trailer begins moving, turn the car to follow it.
- Have a second person assist you with audible and hand signals.



## **LAUNCHING**

Before launching, inspect the launch ramp for any problems that may hinder launching or make launching unsafe. Ramps can be slick and dangerous to drive or walk on, and may have unseen drop-offs beneath the water that would pose a safety hazard. Always be aware of water conditions and the effects of the wind when launching.





Before launching, inspect the boat and trailer for damage. Do not launch if you detect damage or find that the engine or propeller is not in good operating condition. Have any repairs made before launching.

Use courtesy when preparing the boat for launching by preparing away from the ramp on level ground before proceeding to the launch ramp.

When launching the boat on the trailer, have two or more people assist you. Since all launches are different, the following procedures are intended as guidelines only:

- Verify that the vehicle's brakes, including the parking brake, are in proper working order.
- Make sure the trailer is securely fastened to the vehicle.
- Remove the boat cover, if equipped.
- Check that the bilge drain plug is in place and all other plugs that allow water to leak into the boat are in place.
- Remove all tie-downs from the boat.
- Attach the bow and stern docking lines.
- Attach boat fenders if necessary.
- Disconnect the trailer's light harness from the car.
- If applicable, trim or tilt the engine/outdrive up to avoid damage.
- Make sure the bow winch and strap are securely locked and fastened.
- Make sure the bow winch safety chains, if equipped, are in place.
- Make sure all required documentation and safety equipment are on board.
- Verify that batteries are fully charged and in good condition.
- Check fuel level; add fuel if necessary.
- Always launch with the help of another person.
- Make sure there is no one on the ramp behind the boat.
- Keep the trailer/vehicle combination as straight as possible and at 90 degrees to the shoreline.
- Back slowly down the ramp until the transom of the boat is a few inches in the water; then stop the vehicle.
- Stop the vehicle and shift into PARK (automatic transmission) or REVERSE (manual transmission). Apply the brakes and/or parking brake. If possible, use wheel blocks.
- Position the mooring lines within reach of the dock.
- Disconnect the bow winch strap and safety chains, if equipped, from the bow eye.
- Manually back the boat clear of and off the trailer into the water and secure to the dock using mooring lines.



- Remove any wheel blocks and release the vehicle brakes. Pull the trailer slowly out of the water, and secure and park in a designated area.
- Board the boat.
- Lower the engine/outdrive, if applicable.
- Run the bilge blowers as required, if equipped.
- See the Engine Operator's Manual for starting procedures.
- Remove dock lines from the dock and proceed slowly away from the dock.

## **LOADING GUIDELINES**

Follow these guidelines while loading the boat onto the trailer:

- When loading the boat on the trailer, have two or more people assist you.
- Stop, turn off the engine and secure it to the dock with dock lines at a position clear from where the trailer will be in the water.
- If applicable, trim or tilt the engine/outdrive up to avoid damage.
- Verify that the vehicle's brakes, including the parking brake, are in proper working order.
- Disconnect the trailer's light harness from the tow vehicle.
- Make sure the trailer is securely fastened to the vehicle.
- Back the trailer slowly down the ramp until it is positioned so that the boat can be loaded.
- Stop the vehicle and shift into PARK (automatic transmission) or REVERSE (manual transmission). Apply the brakes and/or parking brake. If possible, use wheel blocks.
- Position the mooring lines within reach of the dock.
- Manually position the boat onto the trailer using mooring lines. Make sure it is centered on the supports of the trailer.
- Position the bow eye into the bow stop and connect and secure the bow winch strap and safety chains, if equipped, to the bow eye.
- Secure the mooring lines inside the boat.
- Remove any wheel blocks and release the vehicle brakes. Slowly pull the trailer and boat up the ramp.
- Secure the transom to the trailer.
- Prepare for trailering as necessary.





## REPORTING SAFETY DEFECTS

If you believe that your boat trailer has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying the trailer manufacturer.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of trailers, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer or the boat manufacturer.

To contact NHTSA, you may call the Vehicle Safety Hotline toll-free at 1-888-327-4236 (TTY: 1-800-424-9153); go to https://www.nhtsa.gov; or write to Administrator, NHTSA, 1200 New Jersey Avenue SE, Washington, DC 20590. You can also obtain other information about motor vehicle safety from https://www.nhtsa.gov

This Page Intentionally Left Blank

# Section 9

# **BOAT FEATURES AND OPTIONS**

Before operating any systems within this section, review Safety in Section 2.

The boat may be equipped with a variety of systems to operate the boat and to provide other conveniences you may need while on the water. The following basic and typical information may not apply to your specific application. All of the boat's systems may not be covered in this section. See the Equipment Manufacturer's Operator's Manual for specific details.

Regularly inspect and maintain all components and systems to prevent unexpected hazards due to worn or faulty components. Be sure to replace components and hardware with marine-grade parts.

WARNING Fire/Explosion Hazard: Never use parts not specified for marine use to replace marine-grade parts. Using non-marine specified parts in a marine environment may result in a fire and/or explosion.

#### **ELECTRICAL SYSTEM**

Boats may be equipped with one or two types of electrical systems: Direct Current (DC) and Alternating Current (AC).

Most boats use a battery-powered direct current (DC) system; some boats also use a generator or shore-powered alternating current (AC) system. Most systems have a main load panel which serves as the main distribution panel.

### DC SYSTEM

WARNING Fire/Explosion Hazard: Always use caution when operating and maintaining the DC electrical system. Fire or explosion may result from improper use of the DC electrical system.

Most boats use a 12-volt common negative ground DC system. DC systems are usually the primary electric supply for lights, pumps, blowers, engine starting, etc.

Boats require at least one battery per engine. Multiple-battery systems consist of a cranking battery for each engine and additional batteries that supply auxiliary power to DC electrical circuits.

Battery switches control battery power distribution and disconnect the batteries from the boat's electrical system. The engine's charging system charges batteries connected to the charging system when the engines are running.



Battery isolators prevent accessory loads and other batteries from depleting power from charged batteries. Isolators also allow the engine's charging system to isolate the alternator charging output and distribute the charge among all batteries according to individual need.

The main DC control panel may feature a voltmeter, battery test switch, fuses, circuit breakers and a master breaker switch.

WARNING Fire Hazard: Never reset a breaker that has been automatically tripped or replace a fuse that has blown without first identifying and correcting the cause of the problem. A fire could result.

WARNING Fire Hazard: DO NOT exceed the recommended fuse sizes or bypass the fuse safeguard. Always install the proper (type and rating) fuses whenever replacing or changing fuses.

### **ENGINE LUBRICATION SYSTEM**

Depending on engine type, the boat may feature one of several engine lubrication systems. Many small-to-mid-range two-cycle outboards are lubricated by oil mixed with an oil injection system where oil is consumed as the engine runs. Oil injection systems include a separate reservoir for oil containment and an oil pump or combination fuel/oil pump that supplies oil to the fuel system for engine lubrication. Four-cycle outboards and sterndrive engines, like automotive, use a sump system where the engine oil is contained in the engine. See the Engine Operator's Manual for engine oil recommendations and information.


## **ENGINE COOLING SYSTEM**

Most outboard engines are cooled by using raw water to transfer heat from the engine and then returning the raw water to the sea/lake. A raw water pickup and screen on the lower drive unit allows water into the engine. A pump then circulates the water to cool the engine. Be sure to periodically inspect the intake screen and clear it of any debris which could obstruct water flow into the engine. A continuous discharge of water from the cooling water check port while the engine is running is a visual indication that the engine's cooling system is operating properly.



To prevent

engine damage. DO NOT run it with the lower drive unit raw water intake above the waterline or out of the water.



## **FUEL SYSTEM**

The basic fuel systems consist of one or more fuel tanks, tank vents, level sensor and gauge, lines, pumps and valves.

Each tank has an antisiphon valve to prevent fuel from leaking out of the tank should a break occur in the system at a point other than the tank. Some models are also equipped with a fuel shutoff valve at each tank to stop fuel flow from the tank. It is recommended that fuel shutoff valves be closed during long periods of inactivity or storage. Refer to the boat and Engine Operator's Manual for specific fuel system information and service information.

## SHIFT AND THROTTLE CONTROLS

Knowing how to operate the shift and throttle controls of the boat is essential for safe and proper operation.

The following basic and typical information may not apply to your specific shift control. See the Engine Operator's Manual or control manufacturer's instructions for information on your throttle and shift control operation, adjustment and maintenance.



WARNING Control Hazard: Always use extreme caution when using a single-lever binnacle control. These controls may not have a neutral lockout position or a neutral detent. These controls can accidentally move from Forward to Reverse or Reverse to Forward easily. This could result in a control hazard.

#### NEUTRAL START SAFETY SWITCH

The neutral start safety switch provides start-in-gear prevention. The switch controls power to the engine starter circuit of the ignition switch. The engine gear shift control lever must be in the NEUTRAL position to allow the ignition switch to activate the engine starter. This safety device will prevent the boat's engine from starting if the engine is in gear. Most throttle/shift controls have this feature.

### SINGLE-LEVER CONTROLS - SINGLE OR TWIN ENGINE

NEUTRAL - The lever is detented in the NEUTRAL position (center of travel) for starting; the neutral safety switch allows starting in this position only. For engine warmup, a separate lever or button on the control is used to disengage the shift cable and allow the throttle to advance only while the transmission remains in NFUTRAL.


FORWARD - Release the detent lock to allow shifting to the FORWARD position. Moving the lever into the first 15 degrees of travel (toward the bow or up) positions the control in the FORWARD detent IDLE position. Advancing the lever beyond 15 degrees allows throttle increase in FORWARD.

REVERSE - Release the detent lock to allow shifting to the REVERSE position. Moving the lever into the first 15 degrees of travel (toward the stern or down) positions the control in the REVERSE detent idle position. Advancing the

STARBOARD **PORT** CONTROL CONTROL LEVER **LEVER** KC-0093-A

lever beyond 15 degrees allows throttle increase in REVERSE.

Single-lever controls operate both the gear shift and the throttle for one or two engines with one control lever.



## **CONTROL OPERATION GUIDELINES**

! WARNING Control Hazard: Improperly maintained controls are hazardous and may cause sudden loss of control. Make sure all shift/throttle hardware and cables are regularly inspected and maintained. Improper maintenance may result in a loss of control.

- Side mount throttle and shift controls have a neutral detent locking lever that must be released before shifting from NEUTRAL.
- Always use a brisk and decisive movement when shifting into or out of gear.
- Always pause in NEUTRAL before shifting from FORWARD to REVERSE, or REVERSE to FORWARD. Most throttle and shift controls have a detent position for NEUTRAL, FORWARD and REVERSE engagement positions. Engine damage may occur if you rapidly shift into gear without pausing in these detent positions or allowing the engine RPM to lower into the approved shifting range.
- When traveling at high speed, never shift into REVERSE while your boat is in FORWARD gear.
- Always keep the shift control clean and clear of obstructions.



**NOTICE**Most shift and throttle controls are equipped with a safety switch for start-in-gear prevention. Place the control in the NEUTRAL position before you attempt to start the engine.

Never attempt to shift when the engine is not running.

## **SAFETY SYSTEMS**

#### ENGINE EMERGENCY STOP SWITCH AND LANYARD

The engine emergency stop switch controls the engine ignition ON/OFF. This safety device shuts the engine off immediately and prevents the boat from becoming a runaway if the operator is accidentally thrown from the seat or away from the helm.

Whenever the boat's engine is on, physically secure one end of the emergency engine stop switch lanyard to the emergency stop switch and the other to the boat operator. Some optional systems use a wireless FOB attached to the operator. If the operator is thrown from the seat or moves too far from the helm, the lanyard will disconnect from the switch, activating the switch to turn off the engine.



**WARNING**Control Hazard: Never remove or modify the engine emergency stop switch and/or lanyard.

- Always check the switch for proper operation. With the engine running, pull the lanyard. If the engine does not stop, have the switch repaired before continuing to operate the boat. Never operate the boat if the engine emergency stop switch does not work.
- Attach the engine stop switch cord lanyard to a secure place on your clothing, your arm or leg while operating.
- Avoid accidentally pulling the cord lanyard during normal operation.
  Loss of engine power means loss of most steering control. Also,
  without engine power, the boat could slow rapidly. This could cause
  people and objects in the boat to be thrown forward.
- DO NOT attach the cord lanyard to clothing that could tear loose. DO NOT route the cord lanyard where it could become entangled, preventing it from functioning.

## STEERING SYSTEM


WARNING Control Hazard: Be sure to inspect the outboard's steering system for damage after striking an underwater object. Stop immediately to inspect for damage that may result in loss of steering control.

WARNING Control Hazard: Improper maintenance of steering system is hazardous and can cause death or serious injury from sudden loss of control. Ensure all steering hardware, cables and grease fittings are regularly inspected and maintained. If any steering problems are noticed, do not operate the boat and contact your dealer immediately for service assistance.

The boat may be equipped with one of three different steering systems: mechanical, hydraulic or electric. Check steering for smooth operation before each use; if the steering is difficult or binding, do not operate the boat.

#### MECHANICAL STEERING

This system uses a push-pull cable connected between the steering wheel and outboard steering link. Some propulsion units provide a connection for hydraulic assist.






## HYDRAULIC STEERING

The boat may be equipped with optional hydraulic steering for easier control of higher horsepower outboards. This system uses a pump built into the steering wheel and hoses connected between the pump and a cylinder connected to the outboard steering link. Turning the wheel pumps hydraulic fluid to the cylinder to turn the engine.

### **ELECTRIC STEERING**

The boat may be equipped with optional electrical steering for easier control of the most powerful outboards and twin installations. This system uses sensors in the steering wheel to send signals to an electric motor connected to the outboard steering link to turn the engine. Some electric steering systems are integrated into the outboard engine. See the Engine Operator's Manual or steering




manufacturer's information for safety and maintenance instructions.

## **PROPELLERS**

The following basic information may not apply to all forms of propulsion. See the Engine Operator's Manual for information on propellers for the boat. Consult the boat dealer for assistance when replacing or servicing propellers.

The propeller converts the engine's power into the thrust needed to propel the boat. Care and selection of the propeller is very important for proper boat operation. Propeller size is usually identified by two numbers, such as 13 x 19, and a material identification, such as aluminum or stainless steel. In the number sequence, the first number is the diameter of the propeller in inches and the second is the pitch in inches.




KC-0149C-A



Pitch is the angle of the blades expressed in the theoretical distance a propeller travels in each revolution. In the previous example, the pitch is 19, which means that each revolution of the propeller pushes the boat 19 inches (483 mm) through the water.

Propellers are usually replaced out of the water to prevent loss of parts and to ensure correct installation. Although propeller



replacement can be completed with the boat in the water, it is not recommended. Special tools are required for most applications. Always consult the boat dealer for assistance when replacing or servicing propellers.

#### PROPELLER SELECTION AND REPLACEMENT GUIDELINES

There are many different propeller designs for specific operating characteristics. Always consult a certified marine technician when replacing your propeller.

To prevent accidental start-up, complete the following before installing or removing the propeller:


- Position the shift control in NEUTRAL.
- Position the battery switch to the OFF position and remove the key.
- Place a wood block between the cavitation plate and the propeller to hold the propeller in place. Remove the propeller nut.

WARNING Personal Injury Hazard: Never use your hand to hold the propeller when removing the propeller nut; the propeller blades are sharp. Wear protective gloves.



#### **Dual-Prop Drives**

Many propulsion manufacturers offer an optional dual-prop drive. Both forwardfacing and rear-facing dual-prop drives have one prop turning clockwise and the other prop turning counterclockwise to cancel prop-torque for easier steering. With either design the forward prop (referenced to the bow of the boat) turns counterclockwise while the rear prop turns clockwise.

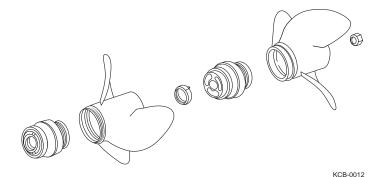

In dual-prop drives, either prop can have three or four blades and have different pitches and/or diameters. Some configurations can increase top speed and less WOT RPM at the expense of fuel economy, or provide additional torque and higher WOT RPM at the expense of top speed. Always treat the propellers on dual-prop drives as a set and change them out as a set even if only one is damaged. Read the propulsion manufacturer's owner's information carefully and consult the dealer or a marine propeller specialist for assistance.


## **GAUGES / INSTRUMENTS**

The following basic and typical information may not apply to your specific boat. This section may not cover all gauges on the boat. See the Engine Operator's Manual or equipment manufacturer's supplied information on the use and operation of the unique gauges and instruments.

Gauges are visual indicators that help you monitor various system and component operation parameters. Gauges usually have lights integrated into them for visual clarity when operating at night. They are located near the helm area or other main control areas. Gauges are available in two forms, digital and analog. No matter the form, most modern gauges connect to the NMEA 2K or CANBUS network to receive the information to display.

## **DISPLAY PANELS**

The boat may be equipped with one or more display panels, sometimes referred to as a multi-function display (MFD), cockpit or glass display. Panels are available in different sizes and can be dedicated to a single function, such as switching, or can be multi-functional for engines, navigation systems, video display, etc. Some displays allow side-by-side or four-quadrant display of information at the same time and are connected to the NMEA 2K network. Panels can also be dedicated to the propulsion system and can duplicate other helm controls via CANBUS network.



Operation of the displays can vary by type, brand and installed options; read the display operation information and control-specific user manuals for proper use. Consult the boat dealer, who is often the best source when it comes to making an informed decision on adding or integrating display panels.

Display panels and some electronic controls can also integrate one or more optional capabilities such as:

- Engine/systems information display
- Embedded Wi-Fi/Bluetooth/remote control operation
- Radar/sonar/fish finder
- GPS/autopilot/navigation/chartplotter
- Station keeping
- Cruise/tow/trim control
- Second station/joystick operation
- VHF/AIS/DSC
- Video/camera/thermal image display
- Digital switching/stereo



Some options can be retrofitted if the NMEA 2K network is in place, but it is dependent on the propulsion/display manufacturer. The dealer is the best source of information.

WARNING Multi-function display panel features and options are only tools to assist skippers with operation. Use of these tools does not relieve the skipper of the responsibility to safely operate the boat.

- Never leave the helm unattended and be prepared to quickly regain helm control should a situation arise.
- Never operate the boat while watching video. Distracted driving while the boat is moving is extremely dangerous.
- Units with GPS are a navigational aid only and cannot be used for precise measurement of direction, distance, location or topography.

#### **MULTI-GAUGES**

The boat may be equipped with one or more multigauges that combine an analog look with digital display of specific data such as fuel management/economy, trip logs and GPS and is speed-selectable with the touch of a button. Some multi-gauges allow boaters to customize the type of information and how it is displayed. These gauges communicate digitally over an NMEA 2K or CANBUS network and replace mechanical gauges, sensors and wires. Most units support multiple propulsion units and share data with other operation stations. Refer to the Gauge and Propulsion Manufacturer's Owner's Manual for more information.



### **FUEL LEVEL GAUGE**

The fuel level gauge indicates approximate fuel level in the fuel tank via an in-tank sensor. The accuracy of the fuel gauge may vary as the attitude of the boat changes; the reading is only an approximation. As a general rule, always use the "one third" rule. Use one third of the fuel to reach your destination, one third to return and one third as reserve fuel.



## OIL LEVEL GAUGE (OUTBOARD ENGINE OIL INJECTION OPTIONAL)

The oil level gauge indicates the level of outboard engine oil in the reservoir used for the oil injection system. Some oil injection systems may provide an indicator on the reservoir. See the Engine Operator's Manual for additional information.

#### SPEEDOMETER 1

The speedometer indicates approximate forward boat speed in miles per hour (mph). Most modern speedometers are connected to a GPS antenna.



#### TACHOMETER

The tachometer indicates engine speed in revolutions per minute (rpm) via CANBUS. Monitor engine rpm at all times to keep the engine within the proper rpm operating range. See the Engine Operator's Manual for the rpm operating range of your engine.



## TRIM / TILT GAUGE

The power trim/tilt gauge indicates the angular position of the lower drive unit and propeller in relation to the transom of the boat via CANBUS.





### **VOLTMETER**

The voltmeter indicates the voltage of the main cranking battery in volts DC via CANBUS. See the Engine Operator's Manual for the normal operating range.



#### WATER PRESSURE GAUGE

The engine water pressure gauge indicates the water pressure of the engine cooling system in pounds per square inch (psi) via CANBUS. This gauge monitors the engine cooling system operation and indicates overheating problems. See the Engine Operator's Manual for the normal operating range.



## WATER TEMPERATURE GAUGE

The engine water temperature gauge indicates the water/ coolant temperature of the engine cooling system via CANBUS. Most marine engines use seawater to cool the engine. A sudden increase in temperature could be an indication of a blocked cooling passage or a water pump malfunction.

Check the gauge immediately after starting the engine. If the temperature gauge is high, STOP the engine immediately and see the Engine Operator's Manual for corrective action.



#### **HOUR METER**

The engine hour meter indicates the total number of hours the ignition switch is in the ON position via CANBUS. Under normal conditions, the engine is running when the ignition switch is ON; therefore, the hour meter provides an approximate indication of engine hours. An hour meter is useful in determining scheduled maintenance.



#### ACCESSORY PORTS

Your boat may be equipped with one or more accessory power ports for electronics. Ports may be a round 12VDC "cigarette lighter" style and/or 5VDC USB style. These ports are for power/charging only and are typically active when the battery switch is ON. USB ports cannot be used for uploading/downloading data or music and are typically limited to 2A draw. The ports are protected by a circuit breaker or may have an inline fuse.



#### WATER DEPTH GAUGE

The water depth gauge indicates the approximate distance between the bottom of the boat and the earth's surface directly below the transducer. To avoid running aground in shallow water, always add extra distance to meter readings. Most water depth gauges are independent of all other electronics and may have additional sensors for air/water temperature, etc. See the manufacturer's instructions for installation requirements and operating instructions.



## **COMPASS**

A compass assists in navigation by indicating where approximate north is located. Keep large metal objects such as drinking mugs or any type of electronics such as phones at least 2 feet away from the compass to prevent deviation of the indicated heading. See the manufacturer's instructions for operating instructions.



KC-0107-A

### **HELM AND CONTROL SWITCHES**


The following information is intended as basic and typical and may not apply to your specific application. Not all switches may be covered in this section. The switches in the boat are two- or three-position rocker-type with LED indicators for positive ON/OFF identification.

Many of the electrical features and systems in the boat are equipped with a control switch and protected with breakers or fuses. Switches are designed for different applications and found in many styles and shapes. Some switches may have a lighted indicator for easy ON/OFF identification. Some switch panels contain a master power switch that controls power to all circuits.

## TRIM / TILT SWITCH

The power trim/tilt switch controls power ON/OFF to the engine's power trim/tilt electric hydraulic pump. This switch is usually a three-position switch, with OFF in the center. If engine is equipped with power trim and tilt, this system allows you to raise and lower the lower drive unit and propeller to adjust trim (the planing, and running angle of the boat while underway).

The tilt feature positions the lower drive unit up beyond the power trim range and is used for trailering, launching or beaching. Never use power tilt when the engine is running.



### **BOARDING AND COURTESY LIGHT SWITCHES**

The boarding and courtesy switches control power ON/OFF to boarding lights and cockpit courtesy lights. Your boat may also be equipped with optional LED mood lighting activated by a separate controller. Mood lights are typically Red-Green-Blue and can generate hundreds of different colors. Avoid the blue spectrum; the red spectrum is best for night vision.

#### DOCKING LIGHTS SWITCH

Your boat may be equipped with docking lights at the bow. Only use these lights when approaching the dock/mooring at night and switch them OFF when underway.

#### HORN SWITCH

The horn switch controls power ON/OFF to sound the horn.

#### IGNITION SWITCH

The ignition switch controls the engine starter circuit, the engine ignition system and accessory circuits connected to the ignition switch. Boats with electronic controls may have a FOB and a START button. The FOB must be in close proximity to the helm for starting.

### ACCESSORY SWITCH

An accessory switch is provided for the control of optional equipment added to the boats. Fuses should be integrated with any non-factory equipment added by a certified marine electrical technician.

## NAVIGATION LIGHTS SWITCH

The navigation lights switch controls power ON/OFF to the boat's navigation, running and anchor lights. This switch is usually a three-position switch, with OFF in the center. When the switch is in the NAV position, the red and green navigational, white stern and running lights, and console gauge lights are activated. When the switch is in the ANC position, only the white all-around light is activated.

Never operate the boat between sunset and sunrise using only the stern light. Use all navigational lights when operating underway between sunset and sunrise. Verify that all lights are operating before getting underway.



## **FUEL-BURNING APPLIANCES**

DANGER Exhaust Hazard! Fuel-burning open-flame appliances consume cabin oxygen and release products of combustion into the boat. Ventilation is required when appliances are in use. Open designated vent openings while appliances are in use. Never obstruct ventilation openings and ensure that fluid appliances are operating correctly.

If your boat is equipped with a liquified petroleum gas (LPG) appliance such as a grill, be sure to read and understand the Appliance's Owner's Manual information and follow the appliance's safety labels before operating the appliance. Fuelburning or open-flame appliances consume cabin oxygen and release products of combustion in the craft. Ventilation is required when operating or changing fuel cylinders for these types of appliances. Make sure there is adequate ventilation and the appliance is working correctly. DO NOT use these types of appliances to heat the galley or cabin spaces.

If your boat is equipped with a fuel-burning appliance:

- The use of fuel produces carbon monoxide gas. Be sure spaces containing fuel-burning appliances are well-ventilated.
- Do not obstruct access to the appliance in any way.
- At least annually, inspect the hose and vent of the appliance. Replace if any deterioration is found.
- Keep valves on empty cylinders closed and disconnected. Keep protective covers, caps or plugs in place. Store reserve or empty cylinders in approved storage lockers or housings which are vented to the outside and intended for that purpose or on the boat exterior, protected from the weather and mechanical damage, and where escaping vapors can only flow overboard.
- Never use fuel storage housings or cylinder lockers to store any other equipment.



### GENERAL OPERATION OF FUEL-BURNING APPLIANCES

IMPORTANT Refer to the Appliance's Owner's Manual for specific operation.

Close LPG supply line valves and cylinder valves when not using appliances, before refueling and immediately in an emergency.

Close appliance valves before opening the cylinder valve.

Open designated vent and openings while appliances are in use.

Never obstruct ventilation openings.

If the stove is not gimballed, do not use it when you expect the likelihood of high angles of rolling or sustained angles of heel.

WARNING Fire/Explosion Hazard: Do not use an LPG installation that has leaked until it has been inspected and repaired by a competent person.

If you detect or suspect LPG leakage, take the following action immediately:


- Shut off the LPG supply at the main supply valve(s).
- Extinguish naked flames and other ignition sources (heaters, cooking appliances, pilot lights, etc.).
- Do not operate electric switches.
- Evacuate the area if possible.



### PROPANE GAS GRILL

WARNING Personal Injury Hazard: Take special care when using a propane gas grill on a boat. Failure to take proper precautions may cause personal injury or property damage.

Some models may be equipped with an optional propane gas grill. Only use the grill when it is in the grill mount. Leave the grill in the grill mount until it is completely cool to the touch. For further information, refer to your gas grill owner's manual.

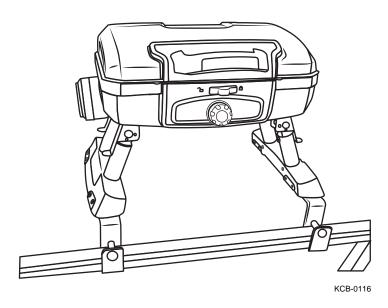

#### To Use the Grill:

- Set up the gas grill in a location that offers the best protection from the wind. 1.
- 2. Do not attempt to use the grill while the boat is moving.
- 3. Do not allow combustible materials near the grill.
- 4. Ensure that the grill has cooled completely before removing it for storage.
- If in a marina, check the marina's rules and regulations for the use of grills. 5.



### FISHING MODELS


Depending on the boat model, fishing models may be equipped with a livewell, fishing seats and a trolling motor receptacle and plug to enhance fishability.

#### LIVEWELL

Fishing models may be equipped with an optional livewell. Livewells are designed to help protect and keep fish or bait alive. Always clean, empty, and thoroughly dry the livewell after each use to prevent contaminating the fish and prevent the transport of AIS. Never use soap, detergents or other cleaners that may be harmful to fish to clean the livewell.

NOTICE To avoid freeze damage to the livewell system, be sure it is completely empty in freezing weather. Residual water in the system may freeze and cause damage to components.

This system is used to maintain water in the livewell tank by the use of a pump that recirculates fresh lake water into the tank with a spray nozzle. An overflow tube at the bottom of the tank prevents overfilling. When the water level reaches the top of the overflow tube it empties back into the lake. The overflow tube is also the drain plug. When it is removed, the water will drain.

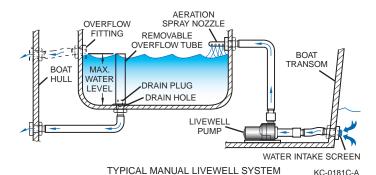



#### Operation

The livewell system can be used only when the boat is in the water.

## NOTICE

I ivewell

systems pull power from the engine starting battery. Using the livewell pump only when the engine is running will conserve battery power.

- 1. Place the overflow tube into the drain hole.
- 2. Position the livewell switch in the ON position and fill the tank.
- 3. When the tank is filled to the proper water depth, turn the aerator switch to the OFF position.
- 4. The tank is now ready for fish. Turn ON the aerator pump from time to time to continue having fresh water in the tank.
- 5. To empty the livewell tank, shut the aerator pump off and remove the overflow tube from the drain hole.



CAUTION Using the aerator pump over a period of time with the engine shut down will drain your battery.

Check the livewell pump often to make sure it is operating efficiently. The pump is located at the rear of the boat and can be accessed through the plates in the splash well or engine compartment. Remove debris and rinse bilge with fresh water with the pump running.

### FISHING SEATS

Some models may be equipped with optional pedestal fishing seats. These seats are mounted on swivel posts. To mount, slide the pedestal post into the base, and then slide the seat into the post. Pedestal seats in the bow area can restrict the driver's view and must be removed when underway at speeds other than trolling.

WARNING Man Overboard Hazard: DO NOT sit in pedestal seats while underway except at trolling speeds. You risk being thrown overboard.

### **RE-BOARDING LADDER**

WARNING Personal Injury Hazard: Always turn the engine off whenever anyone is in the water near the boat.

The re-boarding ladder is usually kept in the UP position if not in use. When skiers or swimmers use the re-boarding ladder it is always helpful to assist them into the boat. The pitching of the boat due to wind or water actions can make boarding difficult.





To board, carefully deploy and use the boarding ladder. Be sure the ladder is fully retracted and secured before operating the boat.

### RAW WATER WASHDOWN

Models equipped with a water washdown use seawater. The washdown is activated with a switch and should be turned off if not being used. If the water stream is weak or not running at all, check the pump for debris or seaweed and clean. If there is still a problem, prime the pump by turning on and backing the boat slowly.



# **SYMBOLS**

BASE SYMBOLS							
Boat	Boat Profile	Engine	Tank	- <b>Ö</b> - Light			
SWITCH SYMBOLS							
Interior Light	Anchor Light	Navigation Light	Engine Room Blower	Bilge Pump			
Windlass	Depth Finder	Windshield Wiper	Windshield Washer	Horn			
ENGINE SYMBOLS							
Ignition	Hour Meter	Engine Key	Engine Stop	Engine Alert			
TANK & BATTERY SYMBOLS							
Fuel	Waste Holding	Freshwater	<b>- +</b> Battery	Battery Parallel			
OTHER SYMBOLS							
Sling Point	S Lift Point	Fuel	Diesel Fuel	Safety Alert			

# Section 10

# **GENERAL CARE AND MAINTENANCE**

The boat may feature a variety of specialized systems and components. The following basic and typical information may not apply to your specific application. This section may not cover all systems or components on the boat. See the Engine Operator's Manual or the equipment manufacturer's information for maintenance procedures.

Maintenance procedures may require special knowledge and equipment. Always consult the boat dealer for assistance in performing service, maintenance or modifications to the boat.

Neglect of maintenance and unauthorized service work is not recommended and may void your warranty. Refer to the Engine and Equipment Manufacturer's maintenance schedules and requirements, and keep a detailed log of the procedures and dates completed. Always consult the boat dealer for assistance with periodic maintenance.

Before performing any general care and maintenance procedures within this section, review Safety in Section 2.

### SAFETY EQUIPMENT

Periodically check the safety equipment for damage, general condition and operation when applicable. Always replace safety equipment that is in question or in need of repair:

- Fire extinguisher
- Life jackets
- Visual distress signaling devices
- Audible signaling devices
- Navigational lights
- Emergency radios or Emergency Position Indicating Radio Beacon (EPIRB) or Personal Locator Beacon (PLB)
- First aid kit
- Batteries in electronic devices
- Ditch kit
- Life raft



#### LIFE JACKETS

Maintaining life jackets is important to extending their life. Proper cleaning/sanitation will help rid life jackets of sunscreen, mold and mildew that may break down materials over time. When cleaning, be sure to inspect life jackets for wear and tear that might require repair or replacement. Life jackets are often neglected until they are needed. Consult the life jacket's owner's manual or website for more information.

#### **Use and Storage**

Life jackets that are wet, dirty, or stored in humid conditions can deteriorate quickly. Sunscreen products and body oils can accelerate deterioration. The following tips will help to extend the life of life jackets:

- After use, air-dry jackets out of direct sunlight and away from tree sap. If on the boat, choose a well-ventilated space.
- If you can't air-dry outside, place the jackets on hangers, space at least 6 inches apart, and ventilate with an oscillating fan.
- If dirty (sand or stains) or used in salt water, rinse jackets with plenty of fresh water.
- If stained from sunscreen, foods, or other sources, clean as soon as possible.
- Clean life jackets at least annually.

#### Do Not:

- Use chlorine bleach directly on a jacket, as it can break down fabrics and interior foam.
- Clean jackets with industrial cleaning agents or something like gasoline, paint thinner or acetone. They can dissolve the foam that makes the device functional and weaken the exterior fabric.
- Machine-wash, dry-clean or use strong detergents or degreasers.
- Dry jackets with a direct heat source or clothes dryer.
- Bend life jackets or place heavy objects on top of them, as this can cause crushing and damage performance.

#### **Cleaning Life Jackets:**

Clean the life jackets annually at the end of the season. To clean:

- Fill a bucket with cool water and about two tablespoons of mild liquid laundry detergent.
- Lay a tarp on the ground and place the life jackets, with all straps and hardware unfastened, on the tarp.

- Treat stains with a laundry pre-wash stain remover, work it in with a soft brush and allow it to work for 5 minutes.
- Scrub all surfaces of the jacket using the detergent solution and a soft brush.
- If the jacket has mold or mildew, move it to an outside area and brush away any visible spores before wetting the fabric. Scrub as suggested but add 1/4 cup of oxygen-based bleach to the cleaning solution to help remove dark stains.
- Rinse well using plenty of clean water.
- Hang the jacket to drip-dry out of direct sunlight.
- Place the jackets on hangers, space at least 6 inches apart, and ventilate with an oscillating fan until completely dry.
- Store life jackets in a dry, cool, dark place.

### **BOATING EQUIPMENT**

Periodically check the general equipment on board for damage, general condition and operation when applicable. Always replace equipment that is in question or in need of repair.

- Anchors and anchor lines
- Boat hook
- Dock fenders
- Foul weather gear/clothing
- Mooring lines
- Oars/paddles
- Tool kit
- Tow line

## **CORROSION PROTECTION**

If you keep your boat in salt, brackish, or polluted water, remove the boat from the water about every 3 months and inspect the bottom thoroughly for signs of corrosion.

#### **GALVANIC CORROSION**

Galvanic corrosion (electrolysis) is the deterioration of metals from the effects of electrolytic action. When two dissimilar metals are immersed in a conductive fluid such as salt water, an electric current is produced, much like a battery. As current flows between the two metals, the softer, or sacrificial, metal deteriorates,



If you operate in salt, polluted or brackish waters, the boat should be equipped with a transom-mounted sacrificial anode to prevent corrosion damage to other metal parts of your boat that are in contact with the water. The anodes are self-sacrificing and are slowly eroded by electrolytic action. These anodes are important and require periodic inspection for deterioration. Replace the anode when it is less than 50% of its original size.

Most propulsion units and transom-mounted accessories are equipped with one or more anodes that require periodic inspection. See the propulsion/accessory Operator's Manual for maintenance procedures.

NOTICE Do not paint or coat sacrificial anodes or cathodes with any substance. Once covered, they do not provide protection from galvanic corrosion. Replace anodes if they have deteriorated 50% or more.

Optional, electronic cathode systems are designed to reduce the effects of electrolysis by emitting an electrical low-current charge into the water near the metal components' neutralizing electrolytic action.

#### SALTWATER CORROSION

Any boat exposed to salt water can be affected by the salt. However, to minimize the effects of salt water on boats, consider the following preparation and maintenance. Corrosion prevention is key and proper maintenance will mitigate the damaging effects of salt water.

If you plan to use your boat in salt water, all portions of the boat that will be submerged should be painted with an approved anti-fouling paint. This service is provided by your dealer or by someone recommended by your dealer. There is an extra charge for this service.

If you trailer your boat and use it in salt water, be sure that the bottom of the boat has a barrier between it and the bunks. If anti-fouling paint is not used, salt water trapped in the trailer bunks can cause corrosion at the point where the trailer bunk meets the hull.

In some cases you may need to have sacrificial anodes added to your boat to prevent electrolysis. Ask your dealer whether he recommends adding anodes. There is an extra charge for this service.

Some boats and/or propulsion systems may be designated as "Saltwater Series." This designates that additional design and/or materials are used to make them more resistant to the effects of salt water, but not "saltwater proof." The following maintenance also applies to saltwater series products.

#### Maintenance

Removing saltwater deposits from the boat as quickly as possible is the key to keeping saltwater corrosion in check.

- Rinse the boat hull and deck with fresh water and wash immediately after using the boat in salt water. Allow the boat to dry before covering it with the mooring or seat covers.
- Flushing the engine cooling system is recommended when the engine has been used in salt, polluted or brackish waters. Flush the entire engine cooling system with fresh water for at least 5 minutes after use in these waters. See the Engine Operator's Manual for the flushing procedure. Consult the boat dealer for suitable flushing equipment.
- You should repair paint chips and scratches when you start to notice bare metal showing. Do not paint any sacrificial anodes; rather, remove any oxidation with sandpaper.
- Cover your boat WHEN DRY with seat covers or a mooring cover to keep salt and weather off of your boat. Since most saltwater areas are very humid it is imperative that the boat be dry before it is covered. If you cover it wet you will see mildew develop.
- A yearly inspection for corrosion or deterioration of the electrical connections is recommended.
- If the boat is used primarily in salt water, wax the hull monthly and apply corrosion inhibitor to all hardware.

#### ALUMINUM PONTOONS AND HULLS

In addition to the general saltwater corrosion maintenance, aluminum pontoons/ hulls require more considerations when used in salt, brackish or polluted waters. Even the highest-quality marine aluminum can quickly suffer damage from salt water. To protect your investment:

- Never moor an aluminum boat in the water for more than a few days. Flush with fresh water as soon as possible.
- Remove your boat from the water when not in use. Flush with fresh water as soon as possible.
- It is *imperative* to apply anti-fouling paint as a barrier. This paint does not prevent corrosion; it only mitigates corrosion and marine growth.
- If you trailer your boat you MUST flush the salt water from the bunks before loading. Salt water between the bunks and the pontoons/hull will cause rapid corrosion.
- If you use a boat lift, flush the bunks before and after loading. Remove the boat from the water every two weeks to clean and inspect for corrosion damage.



- If corrosion is evident, talk to other boaters in the area about bottom paints and sacrificial anodes that work for them.
- Consider adding additional sacrificial anodes along the hull. Talk to your dealer.


Check pontoons routinely for dents, leaks or minor damage from regular use. Bumping a rock, log or dock can cause damage that may not be apparent at first; however, these leaks can cause the pontoons to take on water slowly but surely. This water is a safety concern and will weigh down the boat, decrease performance, put unnecessary strain on the engine, and increase fuel consumption.

If you notice your boat sitting lower in the water, or one pontoon sitting significantly lower than the other, water has likely collected in one or more pontoon. You may notice one pontoon sitting slightly lower than the other when your gas tank is filled; this is normal.

Many pontoon boats have drain plugs in the bottom of each pontoon. Since the plugs usually sit below water level, the boat must be removed from the water to drain. If water drains, you must identify and repair the source of the leak. If you have a leak, do not use the boat and contact your dealer immediately.

#### SACRIFICIAL ANODES

Anodes (sometimes called "zincs") are used to protect hardware exposed to the water. Since galvanic corrosion attacks the least "noble" metals first, less noble metal anodes are used to purposefully "sacrifice" themselves, thereby protecting the more noble metals of the drives, propeller, tabs, boarding platform and other metal items below the waterline (such as underwater gear).



KC-6009

Anodes may be installed on the boat transom and/or bottom at the factory. Additional anodes may be installed on the underwater gear as well as any metal components exposed to seawater, such as engine and air conditioning heat exchangers and water cooling jackets. Anodes are made in three different metals which must be matched to the water type and local conditions. Most boats are equipped from the factory with zinc anodes on the recommendation from engine and drive manufacturers. The anodes that are installed on the trim tabs are typically zinc and are isolated from the boat bonding system.

Selection, monitoring and replacement of the anodes on the transom, drives, trim tabs, boarding platform supports and other underwater gear is very important and the customer's maintenance responsibility. Any damage done because of lack of maintenance will not be covered under warranty.

WATER TYPE	ANODE MATERIAL	REPLACE AT
Salt water	Zinc	40% decomposition
Brackish water	Aluminum	50% decomposition
Fresh water (clean)	Aluminum/magnesium alloy	50% decomposition
Fresh water (polluted)	Magnesium	40% decomposition


NOTICE To be effective, anodes must be bare metal. If the boat is dry-docked more than 24 hours, sand the anodes to clean oxidation from the surface.

- Zinc and aluminum anodes left in fresh water or zinc anodes used in brackish water will become covered with white oxide which effectively stops the sacrificial process and exposes the underwater gear to damage.
- Do not paint sacrificial anodes. Bottom paints/sealants on anodes will block the sacrificial process and expose the underwater gear to damage.
- Depending on local conditions, some anodes can deteriorate very quickly and must be closely monitored. See the boat dealer for recommendations.



Because of the vital function that anodes play in the protection of underwater gear, replace anodes at the recommended level of decomposition, or annually, with the correct type. Boats stored in salt water will normally need to have the anodes replaced every 6 months to one year. Anodes requiring replacement more frequently may indicate a stray current problem within the boat or at the slip or marina.

Anodes that do not need to be replaced after one year may not be providing the proper protection. Loose or low-quality anodes could be the problem. There could also be a problem in the bonding system or the wrong anode material is being used.



KC-6006

The boater/customer has the responsibility in maintaining and ensuring that the proper anodes are installed for the area (water) in which the boat will be used. See the boat dealer about changing material or adding additional anodes.

## HARDWARE, FASTENERS AND FITTINGS

Check all fasteners, fittings, hinges, latches, rails and cleats for corrosion and tightness. Repair or replace any items that need attention. Never use automotive replacement parts when replacing marine parts.

Periodically clean all hardware with approved marine cleaners or mild soap and water. Never use abrasive cleaners or materials; they will scratch the polish and protective coatings on the hardware and cause the hardware to corrode. Applying a coating of marine-grade wax can help maintain the original shine of the hardware and help prevent corrosion.

## **ELECTRICAL SYSTEM**

Before performing any work on the electrical system or the battery, review Safety in Section 2.

### **BATTERIES**

WARNING Electrical Shock Hazard: Always disconnect the batteries before performing maintenance on the DC electrical system. Electrical shock may occur if the batteries are not disconnected during maintenance on the DC electrical system.

WARNING Personal Injury Hazard: Always wear gloves and protective eyewear when working on and around the batteries. The batteries contain an acid called electrolyte. Avoid causing damage that could spill electrolyte into the bilge when servicing the batteries. Avoid getting salt water in or on the battery. Either condition can create a poisonous gas that is harmful if inhaled. Always disconnect the batteries before cleaning.

CAUTION Personal Injury Hazard: Never allow a tool to bridge across the battery terminals. Injury can result if the terminals are accidentally bridged with a tool or other conductor.

Today's boats can be loaded with electronics that all run off the boat's battery. Because of this, many boats will have two or more batteries: one for starting and running the engine, and one for electronics, commonly referred to as the house battery. One advantage is that the starting battery will not be drawn down when using electronics with the engine off, such as with a stereo. Another advantage is if the starting battery has lost capacity because of age, the battery switch has a 1+2 (Both) position that parallels both batteries for emergency starting. See the *Blower* Switch section of this manual for more information.

Marine batteries generally come in two types: starting and deep-cycle. Starting batteries are similar to car batteries, can supply lots of current for a short period of time and are used for starting the engine. Starting batteries should be recharged almost immediately and do not tolerate deep discharges. Deep-cycle batteries are designed for repeated discharging and recharging cycles without damage. They are used as the house battery on boats with higher DC power requirements.

All batteries have one thing in common — they run for a while, need recharging and require an eventual replacement as the capacity fades. Most marine batteries are sealed and require no maintenance other than keeping them at a full state of charge and diligently cleaning corrosion from the terminals. To maintain long life, deepcycle batteries should not be discharged more than 50% before they are recharged.

Most marine batteries are flooded, sealed lead-acid, but there are several different battery types/chemistries that could be used. You must use caution when charging or replacing the batteries; replace batteries with the exact same type, group and capacity. If your boat is not equipped with an onboard battery charger, use a smart charger suitable to your battery type/chemistry.

EAUTION


Burst Hazard: Never use an automotive type (leadacid) battery charger to charge a gel cell type battery. Doing so will cause damage to both the charger and battery and can cause the battery to burst. Use a battery charger specifically designed to charge gel cell type batteries.

Always turn off the battery switch (if equipped) or disconnect the negative battery cable before servicing the electrical system.

NOTICE

The following information applies to lead-acid batteries. If you replace the batteries with batteries using different chemistry such as Li-lon, you must follow the battery manufacturer's instructions for inspection, maintenance and charging.

Refer to the OEM information for operation details.



# When you install a battery:

- Make sure the battery terminals are clean.
- Be certain to use correct polarity when you connect the battery cables to the battery.
- Make sure the cable connections are tight.
- Always shut down the engine before removing or attaching battery cables and never run the engine with the battery cables disconnected.
- Always remove the negative (-) cable first. Always attach the negative (-) cable last.

Check the battery frequently for signs of corrosion. If corrosion is evident, clean the terminal posts with a baking soda and water solution and a wire brush. Disconnect the battery terminals before cleaning.

WARNING Burn Hazard: Lead-acid battery fluid can cause severe burns.

Check the fluid levels in the cells.

NOTICE Some batteries are sealed and cannot be filled. A level of approximately 1/4 to 1/2 in. (6 to 13 mm) above the plates is sufficient. If needed, fill with distilled water: do not overfill.

During extended periods of non-use, batteries will self-discharge and should be recharged. Before recharging, disconnect the battery terminals and remove the battery from the boat. Recharge the battery according to the directions enclosed with the battery and battery charger. When installing the battery in the boat, make sure the battery is secured in the battery box, the terminals are tight and all protective covers are in place.

WARNING Fire/Explosion Hazard: Hydrogen gases produced by a lead-acid battery while it is charging, or the engine is running, can cause a fire and/or an explosion.

#### CIRCUIT BREAKERS AND FUSES

Never exceed the recommended fuse sizes or bypass a fuse in a circuit. Always install the proper (type and rating) fuses whenever replacing or changing fuses. Continuous fuse/breaker failures indicate a severe problem and require immediate attention.

WARNING Fire Hazard: Never reset a circuit breaker that has been automatically tripped or replace a fuse that has blown without first identifying and correcting the cause of the problem. Failure to correct the cause may result in a fire hazard.



#### TYPICAL BREAKER / FUSE PANEL



KC-0247C-A

Some applications use circuit breaker switches to provide individual circuit protection with the ability to manually reset the breaker switch.

To reset a tripped circuit breaker, move the breaker switch to OFF. Identify and correct any problems with the circuit and unplug all loads connected to it. Wait a minimum of one minute for the breaker switch to cool and then push the breaker switch to ON. Turn the breaker switch to OFF immediately if it trips, and consult qualified personnel.

To replace a fuse, locate the fuse block and the failed fuse. Carefully remove the fuse without touching other fuses or wires. When possible, use a fuse removal/installation tool. Some accessories have in-line fuses accessible inside the helm or near the battery.

**! WARNING**Fire Hazard: DO NOT exceed the recommended fuse sizes or bypass the fuse safeguard. Always install the proper (type and rating) fuses whenever replacing or changing fuses.

**NOTICE**A boat's electrical system is designed to protect you from electrocution, short circuits and overloads. Have a qualified electrician perform any modifications to the system such as adding electrical accessories. Some installed accessories, such as stereos, have an additional fuse located in-line with the positive lead. Other accessories may use in-line fuses near the battery.

### MOTOR POD

The motor pod may accumulate trash, oil and greasy dirt over a period of time and should be cleaned periodically. Consult the boat dealer for recommendations on special environmentally friendly cleaning products and procedures.

#### **BILGE PUMP**

Fishing models may use a bilge pump for filling and recirculating the livewell. Periodically check the bilge pump(s) inlet screens and hoses for obstructions and debris. Foreign materials can clog the screen and hoses or become lodged in the bilge pump impeller, which can cause the pump to malfunction. Periodically check the operation of the bilge pump and float switch, if equipped. Inspect all wiring, clamps and hoses for tightness on a regular basis.

### **ENGINE**

The manufacturer of the boat's engine(s) will provide a separate maintenance procedure. See the Engine Operator's Manual for specific information on maintenance procedures.

### **FUEL SYSTEM**

WARNING Fire/Explosion Hazard: Gasoline is extremely flammable and highly explosive under certain conditions.

Be sure to check the fuel hoses and connectors for leaking and deterioration before fueling and on a monthly basis.

Fuel system repairs should only be performed by a marine technician certified in fuel systems.

If equipped, check and/or replace the fuel filter periodically or clean as needed. If the filter has a water separator valve, use a catch container beneath the valve and open the valve to drain the water. Check fuel lines, vent hoses and drain hoses frequently for leaks. Replace any worn or cracked hoses.


Tightening a fitting or clamp may correct a fuel leak. If the leak continues, however, replace the line, fitting or hose immediately to prevent a build-up of fluids or gases.

Use fuel system parts certified for marine use only; never use automotive parts in marine applications. Modern fuel systems are more complex and should only be serviced by a marine technician certified in fuel systems.

### STEERING SYSTEM

WARNING Control Hazard: Improper maintenance of steering system is hazardous and can cause death or serious injury from sudden loss of control. Ensure all steering reservoirs, connections, hardware, cables and grease fittings are regularly inspected and maintained. If any steering problems are noticed, do not operate the boat and contact your dealer immediately for service assistance.


Inspect and maintain the boat's steering system regularly. Frequently check the hardware at the helm, propulsion unit, or rudder end for tightness. See the propulsion Operator's Manual or the steering manufacturer's information for the appropriate torques and periodic maintenance.



TYPICAL MECHANICAL OUTBOARD ENGINE STEERING LINK KC-0158-A

Make sure hydraulic hoses are tight and leak-free. Check cylinder seals for dampness, which indicates leaking. Check the fluid reservoir monthly and top off if necessary. See the steering system manufacturer's information for more details.





### GENERAL CLEANING AND MAINTENANCE

WARNING Asphyxiation Hazard: Do not mix cleaning agents together; toxic vapors may be released. Read and follow safety-related precautions found on the product labels.

#### MARINE GROWTH

If accelerated marine growth is a problem in your area, an antifouling bottom paint may be necessary to slow growth and prevent gelcoat damage. Before selecting a bottom paint, talk to the boat dealer to determine which product works best in your area. Many local variables can affect the selection of paint. Be sure to follow the paint manufacturer's directions exactly.

CAUTION When choosing an antifouling or protective bottom paint for your boat's aluminum hull, do not use any paint that contains copper or copper derivatives that may cause galvanic corrosion.



#### CLEANING

Never allow any type of cleaning solution or cleaning material to come in contact with the water or be discharged into the water. The discharge of any type of debris or waste, including, but not limited to, food, trash, garbage, oil, fuel, liquids and human waste, is highly restricted, if not unlawful, in most waterways. Never discharge anything into the water.

Periodic cleaning is the best way to keep the boat looking new. Regular washing and waxing keep dirt, algae and water deposits from building up and deteriorating the finish. Keeping the boat in "show room" condition means greater personal satisfaction and higher resale value. Special cleaning products are available from the boat dealer.

#### HULL

When washing the boat, use a mild detergent with a warm water solution. Never use any kind of alkaline cleaners such as Tri-Sodium Phosphate (TSP), abrasive cleaners, solvents, ammonia or chlorine to clean gelcoat surfaces, as these will damage the gelcoat surface. Special cleaners are available from the boat dealer to remove marine growth and algae from the hull.

Wax gelcoat surfaces at least twice a season. Special marine gelcoat waxes are available from the boat dealer to prevent color fade and dirt adhesion. If the gelcoat has oxidized, chalked, dulled or faded from lack of proper maintenance, buffing may be necessary to bring back the shiny appearance. Hand buffing with #7 rubbing compound or power buffing with glazing compound #1 will quickly restore the surface; however, always seek certified assistance before attempting to restore your boat's finish.

#### VINYL UPHOLSTERY

Regular washing with warm, soapy water and a medium-soft brush is sufficient to keep the cushions, canopy top and other vinyl coverings in good condition. Keep the cushions from becoming soaked and dry off thoroughly after washing to prevent mildew accumulation after the boat is covered. Position the cushions up in the boat when covered to allow air circulation and spray with mildew repellent.

NOTICE Certain automotive, household and industrial cleaners can cause further damage and discoloration. Be cautious when using solvents and drycleaning fluids, or products that contain dyes such as waxes. Whenever cleaning stubborn stains, test the treatment in an unseen area first. Use the following stain treatments with discretion. Between steps, be sure to rinse thoroughly with plenty of clean water and allow to dry.

For tough stains on vinyl, clean the stain as quickly as possible to prevent it from taking a set. Note that some products such as suntan lotion, shoe polish and wet leaves may stain permanently.

NOTICE Never attempt to clean vinyl, canvas, flooring, or bimini tops with a pressure washer, gasoline, kerosene, or acetone. Do not use a pressure washer on the interior of the boat for any reason or damage will occur.

Although not always convenient, minimizing the boat's contact with damaging ultraviolet (UV) rays and storing removable seats and canopies indoors when not in use will increase the longevity of vinyl upholstery.

### **VINYL CARE AND CLEANING GUIDE**

TYPE OF STEPS:	1	2	3	LEGEND
General care	Α	В		A = Medium-soft brush, warm soapy water, rinse/dry
Dirt buildup	Α	В		
Ballpoint ink*	В	Α		<b>B</b> = 303 Fabric and Vinyl Cleaner <sup>®</sup> , rinse/dry
Chewing gum	В	Α		C = Wipe or scrape off excess (chill gum with ice beforehand)  All cleaning methods must be followed by
Coffee, tea, chocolate	В	Α		
Grease	С	В	Α	a thorough rinse with clean, warm water.
Household soil	Α	В		Failure to care for your vinyl properly or
Ketchup	Α	В		use of improper cleaners may void your warranty and damage your vinyl.
Latex paint	Α	В		
Lipstick	С	Α	В	
Mildew or wet leaves*	В	Α		
Motor oil	С	В	Α	
Oil-based paint	С	В	Α	
Permanent marker*	В	Α		
Spray paint	В	Α		
Suntan lotion*	Α	В		
Tar / Asphalt	С	В	Α	
Yellow mustard	Α	В		

<sup>\*</sup> May leave a permanent stain

#### **Recommended Products**

- Mild dish soap
- 303® Fabric & Vinyl Cleaner

#### **Non-Recommended Products**

- ArmorAll<sup>®</sup>
- Bleach
- Baking soda
- Fantastik<sup>®</sup>

- Formula 409®
- Murphy® Oil Soap
- Simple Green<sup>®</sup>
  STP<sup>®</sup> Son of a Gun!<sup>®</sup>

CANVAS COVERS AND BIMINI TOPS

In most cases, boat canvas receives more abuse than any other item on a boat. Canvas must be regularly maintained for long life and top performance. Moisture, dirt and chemicals from industrial fallout, heat, ultraviolet rays and salt water can all contribute to the deterioration of canvas. These elements can cause serious damage if left unchecked. The following guidelines will help you keep your canvas in good condition for years to come:

- Convertible tops are not designed for extended exposure to the elements as a protective cover at dockside or when the boat is in storage. Use a full, properly fitted, light-colored mooring cover for these purposes.
- If canvas gets wet during use, remove any side curtains and open the windshield to allow both sides and all seams to dry. The air circulation will allow all canvas to dry and prevent the growth of mildew. Never store wet or damp canvas.
- Occasionally set up all canvas and curtains, and hose down with fresh water to remove accumulated soot and dirt. Sweep or brush the underside of the canvas to prevent the accumulation of dirt and mildew.
- Wet canvas must be allowed to dry thoroughly before storage. Never allow canvas to dry loose since shrinkage can occur. Install and stretch all canvas fully on your boat when drying.
- Never allow the canvas to be exposed to direct sunlight for long periods of time.
- Use care when handling clear vinyl curtains and windows to prevent scratching. Never use cleaners on clear vinyl curtains and windows. Use clean water and a soft, clean cloth.
- Never fold canvas where creases can form in the material. Loosely roll canvas to prevent damage.
- Never store canvas in plastic bags. Store canvas in a dry, well-ventilated compartment.
- Outer canvas surfaces can be cleaned with a soft scrub brush and either automotive convertible top cleaners or household cleaners suitable for use on vinyl surfaces. The underside of the canvas may be periodically sprayed with a spray disinfectant to prevent mildew.
- Never store or dock the boat under trees. Tree sap is very corrosive to canvas and can also be harmful to gelcoat and vinyl interiors.
- Adjust canvas top bows to eliminate pockets in which rainwater can accumulate. The weight of accumulated water can collapse or damage the canvas top.
- Lubricate snaps and zippers regularly. Vaseline, silicone spray or paraffin are effective lubricants. Never force snaps and zippers that are stuck.
- Never trailer the boat with the convertible top in the mounted position. Dismantle, roll and securely store all canvas while trailering your boat to prevent wind damage.

#### NON-SKID FLOORING

Your boat may use synthetic non-skid material for flooring, swim platform and other stepping surfaces to enhance traction and reduce slips and falls. This material is comfortable underfoot, easy to clean and highly stain resistant. However, as with any product in the marine environment, regular care and cleaning will keep the material looking its best for many years.

#### Care

Non-skid material is UV protected; however, certain conditions may accelerate fading or damage from the sun, especially on vertical surfaces due to Light Amplification (LA), which can cause sun burning. LA simply means that in addition to direct sunlight, additional sunlight reflected from shiny surfaces such as gelcoat or stainless steel/chrome hardware can be focused on the material and heat it beyond its maximum temperature range. Since sun burning is not covered by your warranty, keep the following points in mind to minimize LA damage:

- Whenever possible, cover the boat/material when kept outdoors.
- Keep objects that can refract light such as pool toys or water bottles off the material as much as possible.
- Consider adding more material to reflective vertical areas that focus on the material.

#### Cleaning

Regularly clean non-skid material to extend its life. Immediately remove sand, dirt, spills and stains to help avoid drastic cleaning measures. See your dealer for recommended cleaning products and always start with vacuuming loose dirt and sand. Always read the use and safety instructions for cleaning products.

For normal cleaning, spray approved cleaner liberally to cover the affected area. With a medium-bristled boat brush, lightly work the product in. Let the cleaner sit for 3-5 minutes, then use water to dampen the affected area and lightly scrub for a second time. Rinse the cleaner off thoroughly and dry the area with a clean towel.

To clean dirt, footprints, etc., use an all-purpose cleaner, degreaser or dish soap along with warm water and a medium-bristled boat brush. Thoroughly work the soapy mixture into the material. Rinse the area with clean water and repeat if necessary.

To remove suntan lotion, use an all-purpose cleaner or degreaser along with a medium-bristled boat brush. Put small amount of the cleaner on the oil stain and use a medium-bristled boat brush and warm water to scrub until the oil disappears. Rinse the area with clean water and repeat if needed.

To remove fish blood, mix one cup of bleach with one gallon of warm water. Using a soft-bristled boat brush, scrub in a circular motion until the fish blood surfaces.

Rinse thoroughly with clean water and repeat if necessary. If not effective, see the following instructions on removing rust stains.

To remove rust stains, use a capful of vinegar or oxalic acid. Apply it to the rust stain and allow it to soak for 3-5 minutes. If necessary, use latex/nitrile gloves to massage the cleaner into the texture of the material. Rinse the area with water and repeat if necessary.

NOTICE When applying oxalic acid, use care to avoid getting acid on the edges of the material, as it could damage the lamination.

#### CARPET

Occasional vacuuming and washing with mild detergent and warm water or household carpet cleaners will keep the carpet clean. Thoroughly wash the detergent out of the carpet with clean water. Let the carpet dry in the sun to prevent any mildew or odor caused by moisture.

To clean mildew off the carpet, first check the cleaner on a small area of carpet that is hidden to determine compatibility of cleaner and carpet. "FISH ATTRACTANTS," which are commonly sprayed on lures and some insect repellants, will cause deterioration of the carpet backing. Spray these formulas away from the boat carpet and clean any spills promptly. DO NOT use pressure sprayers to clean boat carpet.

### **FLOORING**

The flooring should be vacuumed regularly and washed occasionally to keep it looking its finest. Prepare a cleaning solution of mild soap and water. Apply the cleaning solution with a scrub brush and rinse thoroughly with clean water. Allow the flooring to dry before storage.

### **ABS PLASTIC PANELS**

The following cleaning agents have been tested and found to be compatible with ABS panels. The manufacturer's recommendation and instructions for this product should be followed.

- 50% Isopropyl alcohol; 50% water
- Dish soap that does not include a petroleum product or ammonia

Washing to minimize scratching and preserve appearance:

- Wash with a nonabrasive detergent
- Use lukewarm water
- Use a clean sponge or soft cloth
- Rinse well with clean water
- Thoroughly dry with a clean, soft cloth

#### WINDSHIELD

A clean windshield is important. If the boat is equipped with a glass windshield, applying a nonabrasive glass cleaner with a soft cloth will remove most dirt. Clean tinted Plexiglas or plastic windshields with a mild soap solution and damp cloth only. Harsh detergents, solvents, chemicals or dry cloths used on any glass or plastic windshield will scratch the surface.


#### MOORING AND TRAIL FRING COVERS

A mooring cover is typically a lightweight nylon cover used when the boat is moored or docked on the water and that can be quickly fitted on the boat. A trailering cover is a heavier canvas and can be securely fastened to the boat/trailer for highway use. Both types cover the entire boat and offer protection from sun, wind and rain. In most cases, boat covers receive more abuse than any other item on a boat due to exposure to the elements.

Covers should be regularly maintained for long life and top performance. Moisture, dirt, chemicals from industrial fallout, heat, ultraviolet rays, tree sap and salt water can all contribute to the deterioration of covers. Covers are recommended to protect your investment; the following guidelines will help you keep your covers in good condition:

- Always follow any written maintenance instructions from the cover manufacturer.
- Never use a mooring cover for trailering or winter storage.
- Never store or dock the boat under trees. Tree sap is very corrosive to covers and can also be harmful to gelcoat and vinyl interiors.

- Adjust cover top bows/poles to eliminate pockets in which rainwater can accumulate. The weight of accumulated water can collapse or damage the cover. Poles should be extended to maximum height possible.
- Wet canvas must be allowed to dry thoroughly before storage.
- Covers can be cleaned with a soft scrub brush and either automotive convertible top cleaners or household cleaners suitable for use on vinvl surfaces. The underside of the cover may be periodically sprayed with a spray disinfectant to prevent mildew.
- For best results when installing a cover, start with the aft corner on one side, then bow corner on the same side, then apply clips/snaps/straps on that side. Unfold cover to opposite side and repeat.



NOTICE Mooring covers are not designed to be used to protect the boat when stored outside. Use a high-quality, properly fitted canvas cover with suitable support for expected snow loads.

### STAINLESS STEEL AND CHROME HARDWARE

Stainless steel and chrome will normally oxidize over time, especially in marine environments. Cleaning and preventive maintenance of stainless steel and chrome hardware are crucial in maintaining appearance and functionality. If the hardware is left unattended, it can corrode, causing the hardware to appear unsightly and cause structural integrity problems.

Wash the stainless steel and chrome hardware with mild soap and water after operating the boat in corrosive environments such as salt water.

Remove rust or corrosion promptly by cleaning the hardware using a high-quality stainless steel, chrome cleaner or conditioner. Do not use any abrasive materials such as steel wool or sandpaper to clean the hardware. Do not use acids or bleach or any cleaners not intended for stainless steel or chrome, such as glass, tile or counter cleaners, as these types of cleaners can cause permanent damage. Always test a cleaner in an inconspicuous area first before applying to the complete surface.

After cleaning, protect the surface of the hardware by using a high-quality boat, automotive, stainless steel or chrome protectant or wax.

#### ALUMINUM HARDWARE

Periodically wash aluminum hardware with soap and water to keep it clean. If the boat is used in salt water or polluted water, wash aluminum hardware with soap and water after each use. Salt water allowed to remain on aluminum will penetrate the metal and corrode the aluminum.

It is recommended to frequently clean and coat all aluminum hardware with a metal protectant made for aluminum to protect against pitting and corrosion caused by the harsh effects of salt water. Choose an appropriate cleaner specific to your needs, as special cleaners are available for different types of aluminum hardware such as anodized, powder coated and polished.

Most stains can be removed from aluminum with a metal polish or fine polishing compound. To minimize corrosion, use a caulking compound or Teflon-based sealer to isolate hardware and fasteners mounted to aluminum fabrications. With proper care, aluminum hardware can provide many years of service.

### **TRAILER**

Periodically check the general trailer components for damage, general condition and operation when applicable. Always replace trailer components that are in question or in need of repair.

- Lights
- Electrical connectors
- Tires (condition and pressure)
- Wheel lug nuts and studs
- Wheel valve stems
- Wheel bearings
- License plate and holder
- Rollers, bunks and hardware
- General fasteners (missing, loose or corroded)
- Safety chains or straps
- Winch, winch strap and hooks
- Trailer coupler and latch
- Frame, axle and springs
- Spare tire and wheel
- Brakes and actuator assembly

# **MAINTENANCE SCHEDULE**

SERVICE CHECKS					
System/Component	Service Required				
Each Use					
Aerator Pump	Clean screen and check pump for debris				
Electrical Connections	Clean battery terminals				
	Check for loose connections				
	Check fuses				
Livewell	Clean and dry				
Periodically and at Least Annually					
Fuel Hose Connections	Check for leaks				
Battery	Check electrolyte level				
Wiring	Check for insulation deterioration and loose connections				
Anode	Inspect for deterioration. Replace if deteriorated 50% or more.				
Canopy Straps	Inspect for wear				
Canopy Top	Clean				
Perio	dically				
Trailer Wiring System	Check electrical connections				
Trailer Lights	Clean lenses and check operations				
Pontoon Tubes	Clean and check for corrosion				
Sink / Water System	Check for water leaks and pump operation				
As Re	quired				
Battery	Recharge				
Carpet / Flooring	Clean and dry				
Vinyl Upholstery	Clean and dry				
ABS Panels	Clean and dry				
Windshield	Remove dirt and water deposits				
Motor Pod	Remove debris and clean residue				

# Section 11

# WINTERIZATION AND STORAGE

The boat may be equipped with a variety of specialized systems and components. The following basic and typical information may not apply to your specific application. This section may not cover all systems or components on the boat. Consult the boat dealer for assistance.

Winterizing or storing the boat for extended periods of non-use requires special preparation to prevent boat and system damage. Without proper preparation, if the boat is not used or is stored for extended periods of time, internal parts of the engine may become corroded from lack of lubrication. If the boat is stored in freezing temperatures, water inside the bilge, engine cooling system or boat water systems may freeze and cause damage. Be sure to keep up with all annual maintenance during winterization.

Before performing any winterization and storage procedures within this section, review Safety in Section 2.

### LIFTING

NOTICE Consult the boat dealer for proper preparation and lifting instructions for the boat.

Attempt to lift or hoist boats only if you are qualified or experienced with this procedure. This procedure requires special equipment and experience. Do not attempt to lift or hoist the boat alone; damage, personal injury or death can occur.


WARNING Special equipment is necessary to lift the boat and/or engine. Always use undamaged lifting equipment with sufficient capacity to lift the boat and/or engine.

Empty water and water tanks and winterize applicable systems prior to removing the boat from the water. Consult the information for propulsion, water, waste, air conditioning and fuel systems before removal from the water. Improper winterization, lifting and storage is not covered by the warranty.

If the boat is to be removed from the water without a trailer, follow these guidelines:

- Cover lifting cables with a rubber hose or other protectors to prevent damage to the finish.
- Attach guidelines to the bow and stern to control movement.
- Use spreader bars and keep lifting pressure vertical to prevent side load damage.
- Keep the bow slightly higher than the stern to prevent engine damage.



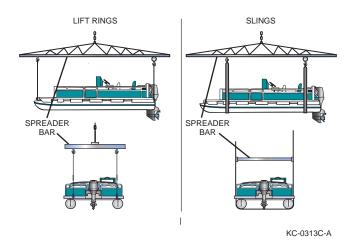

### WINTERIZATION AND STORAGE PREPARATION

The following procedures will help prevent damage to the boat:

 While the boat is still in the water, add the proper amount of fuel stabilizer/ conditioner according to the engine manufacturer's recommendations. If the boat contains fuel with ethanol, pump-out as much as possible before removing the boat from the water. Operate the boat for at least 15 minutes to be sure that the treated fuel has reached the engine.


**NOTICE**If you plan to store the boat for more than three months in either a humid environment, extreme temperatures or outdoors, "fog" the engine with a corrosion-preventing fogging oil according to the propulsion system manufacturer's recommendations. See the Engine Operator's Manual for more information.

- Once the boat is removed from the water, remove the bilge drain plug immediately. Store the drain plug in a plastic bag and tape it to the throttle control lever for easy accessibility the next time you use the boat.
- Inspect all sacrificial corrosion protection anodes for excessive wear and replace as necessary.
- Check all thru-hull fittings and other fasteners for tightness and leakage.
- Thoroughly clean the hull, deck and interior of the boat as soon as you remove it from the water; marine growth is easier to remove when it is wet.

- Always allow all boat compartments to air dry for a couple of days to prevent mildew from trapped moisture. If you use shrink wrap, always allow for ventilation to prevent mildew from trapped moisture.
- Apply a coat of wax to the entire surface of the boat and rust inhibitor on all metal parts.
- Clean all traces of dirt, oil, grime and grease from the engine and bilge.
- After washing, raise the bow of the boat high to allow as much water as possible to drain while performing other storage preparations.
- Touch up areas where paint has been removed.
- Prepare the engine for storage according to the Engine Operator's Manual. Flush the engine cooling system with clean water and/or a nontoxic antifreeze mixture approved for marine use. Never exceed the maximum engine rpm for flushing recommended as stated in the manual.
- Perform all scheduled maintenance for the engine and boat equipment. See the Engine Operator's Manual and all equipment manufacturer's information for periodic and annual maintenance procedures.
- Turn off all electrical switches and breakers.
- Remove all batteries from the boat. Clean, fully charge and store the batteries in an area outside the boat not subject to freezing temperatures. Never store batteries close to heat, sparks or open flames.
- Clean all interior upholstery, furniture, appliances, etc.
- Pest/rodent repellents may help prevent damage to the boat during storage.

### STORING ON A CRADLE OR BLOCKS

When storing a boat on support other than the proper trailer, make sure the hull is supported properly to prevent hull damage. Most cradles are custom-built to support the boat's hull.





- Put the cradle, stands or blocks on a hard, level surface capable of supporting the combined weight of the cradle and the boat.
- When using blocks with jack stands, always use jack stands that are rated
  for more than the required load, making sure they are securely positioned
  so they cannot move under the load. Use a minimum of three blocks to
  support the keel and each side of the boat where applicable. Use a
  minimum total of nine jacks and/or blocks.

#### If stored outside:

- Position the boat to allow for adequate draining from rain or snow.
- Cover the boat to prevent the collection of rain, snow or debris. When
  using a cover, allow ventilation for residual moisture and condensation to
  escape. Never cover or plug the bilge drain hole.

**NOTICE**Mooring covers are not designed to be used to protect the boat when stored outside. Use a high-quality, properly fitted canvas cover with suitable support for expected snow loads.

Position the lower unit drive in the DOWN position.

### STORING ON A TRAILER

- Be sure the trailer supports are adjusted to properly support the boat's hull
- Park the trailer and boat in a protected area with the lower unit drive in the DOWN position.
- Loosen tie-downs and winch line, but be sure the boat is resting properly on hull supports.
- Lift the trailer and place blocks under the trailer frame to relieve weight on trailer tires and springs. Position the boat to allow for adequate draining from rain or snow
- Cover the boat to prevent the collection of rain, snow or debris. When
  using a cover, allow ventilation for residual moisture and condensation to
  escape. Never cover or plug the bilge drain hole.

### STORING DURING THE SUMMER

The best way to store your boat is under a boat house or storage roof. A mooring cover will help reduce the effects of sun and dirt. The mooring cover can repel most water but will collect water during heavy downpours. Always remove collected water after a rain to help prevent tearing and staining. The mooring cover can suffer damage from high winds, so take proper precautions to prevent damage when possible. If you desire a canvas cover that can also withstand heavier loads,



possible. If you desire a canvas cover that can also withstand heavier loads, contact your dealer to get information on a custom storage cover from a local canvas maker.

### RECOMMISSIONING AFTER STORAGE

- Check tire pressure and lug nut tightness on the trailer.
- Inspect the hull for damage.
- Charge and install all batteries.
- Remove blocks from under the trailer frame.
- Tighten tie-downs and the trailer winch line.
- Check the bilge blower vents for obstructions and blower operation.
- Check the bilge pump and float switch for proper operation.
- Inspect all battery and electrical wiring for loose connections and/or damage.
- Check the fuel system for leaks or damage. Verify the condition of all hoses and fuel line. Should a fuel hose need replacing, use only USCGapproved hose. Check hose labels for exact type of replacement. Be sure all hose clamps are tight.
- Check the engine and bilge for signs of nesting animals; clean as necessary.
- Check the entire engine for cracks and leaks caused by freeze damage.
- Check the condition of all hoses and clamps for tightness.
- Clean the bilge area and install the boat bilge drain plug.
- Lubricate all seacocks and check for proper operation.
- Install all drain plugs in strainers and seacocks.
- Close all drains and valves that were opened during winterization.
- Perform any annual maintenance not performed during winterization. See the propulsion and equipment manufacturer's information for periodic and annual maintenance procedures.
- Check all raw water intake areas and screens for obstructions.
- Check and lubricate the steering system.
- Check all navigational lights.
- Check all controls, gauges, boat systems, accessories and related equipment for proper operation.
- Check all fire extinguishers for charge level.
- Inspect all safety equipment for condition and operation as applicable.
- Add fuel to the fuel tank. Add only enough for one week.



 When possible, briefly start and run the engine(s) using proper water supply equipment to check that the engine does start and there are no major operational problems.

**NOTICE**If fogging oil was used during winterization, the engine will emit excessive white smoke upon initial start-up. This condition is normal and will diminish once the fogging oil has been cleared through the engine.

- Once the boat is in the water, start the engine.
- Start the engine(s) and watch the gauge readings closely, checking for leaks and abnormal noises.
- Keep speeds low for the first 15 minutes until the engine has reached normal operating temperature.
- See the *Engine Operator's Manual* and all equipment manufacturer's information for additional recommendations.

# Section 12 **TROUBLESHOOTING**

The following information will assist you in identifying basic performance, mechanical and electrical problems. This information is intended as a general troubleshooting guide and may describe items that are not applicable to the boat.

The tachometer can be very useful when troubleshooting the boat's performance problems. A typical engine should maintain the same operating rpm throughout the useful life of the boat. When the normal operating rpm is known, that rpm should be used as a starting point when performance problems arise.

If you detect a problem with the engine, see the Engine Operator's Manual. If you detect an equipment or boat system problem, see the manufacturer's information for that item.

Before performing any troubleshooting procedures within this section, review Safety in Section 2.

NOTICE Certain problems may require specialized skills and tools. Always consult qualified personnel before making any repairs or modifications.

PROBLEM	POSSIBLE CAUSES
Engine will not crank	Engine emergency stop switch lanyard not connected     Shift/throttle control not in the NEUTRAL position     Battery switch is in the OFF position     Main circuit breaker open     Battery terminals or wiring connections corroded     Low battery voltage     Faulty ignition switch/FOB battery dead     Engine problem
Engine cranks but will not start	<ul> <li>No fuel in tank</li> <li>Fuel tank valves closed to engine</li> <li>Fuel filter clogged</li> <li>Flame arrestor dirty, if equipped</li> <li>Contaminated fuel</li> <li>Engine problem</li> </ul>

PROBLEM	POSSIBLE CAUSES
Poor boat performance	<ul> <li>Improper power trim position</li> <li>Improper trim tab position</li> <li>Uneven load distribution</li> <li>Excessive load</li> <li>Contaminated fuel</li> <li>Improper propeller selection</li> </ul>
	<ul> <li>Excessive water in bilge</li> <li>Damaged or obstructed propeller</li> <li>Marine growth on hull</li> <li>Damaged hull</li> <li>Plugged flame arrestor, if equipped</li> <li>Engine system problem</li> </ul>
Throttle/shifting control problems	Corroded cable     Excessive bends or kinks in cable     Engine/network system problem
Excessive vibration	<ul><li>Damaged or obstructed propeller</li><li>Bent propeller shaft</li><li>Engine system problem</li></ul>
Electrical problems	<ul> <li>Blown fuse/breaker or open circuit</li> <li>Weak or discharged battery</li> <li>Loose or corroded wiring connections</li> <li>Defective switch or gauge</li> <li>Loose shore power connection</li> </ul>
Erratic or no speedometer reading	GPS antenna blocked or cable loose     Speedometer gauge faulty
Instruments not working	Dead battery     Bad fuse
Tachometer reading incorrectly	Incorrect pole setting
Aerator pump runs but will not pump water	<ul><li>Pump clogged with debris</li><li>Pump lost prime; back up boat with pump on</li></ul>
Aerator pump will not run	Bad fuse     Pump problem



PROBLEM	POSSIBLE CAUSES
Navigation lights not working	<ul><li>Light switch in wrong position</li><li>Bad fuse</li><li>Blown bulb</li></ul>
Anchor lights not working	<ul><li>Light switch in wrong position</li><li>Bad fuse</li><li>Blown bulb</li></ul>
No power at helm	Power switch in wrong position



This Page Intentionally Left Blank

## Section 13

## **GLOSSARY OF NAUTICAL TERMS**

ABOARD - On or in the boat.

ABYC - American Boat and Yacht Council, Inc.

**AFLOAT** – On the water.

AFT - Toward the rear or stern of the boat.

**AGROUND** – Touching bottom.

AMIDSHIP - Center or middle of the boat.

**ANCHOR** – (1) An iron casting shaped to grip the lake bottom to hold the boat. (2) The act of setting the anchor.

ASHORE - On the shore.

ASTERN - Toward the stern.

AUTOMATIC CHARGING RELAY (ACR) - An ACR parallels (combines) batteries during charging, and isolates them when charging has stopped and after battery voltage has fallen. An ACR is intended to keep a load from discharging both of the batteries.

**AUTOMATIC IDENTIFICATION SYSTEM (AIS)** – An automatic tracking system used on ships and by vessel traffic services (VTS) for identifying and locating vessels by electronically exchanging data with other nearby ships, AIS base stations, and satellites.

**BAIL** - To remove water from the bottom of the boat with a pump, bucket, sponge,

**BAITWELL** - A miniature livewell used to store and keep live bait alive and healthy. **BEAM** – The widest point on the boat.

**BEARING** – Relative position or direction of an object from the boat.

**BILGE** – The lowest interior section of the boat hull.

BILGE KEELS - The raised areas or aluminum extrusions on the bottom of a boat that parallel the keel.

**BOARDING** – To enter the boat.

BOUNDARY WATERS - A body of water between two areas of jurisdiction; i.e., a river between two states.

**BOW** – The front of the boat.

**BULKHEAD** – Vertical partition (wall) in a boat.

**BUNKS** – Hull supports on trailer that may be covered with carpet, plastic or rollers.

BURDENED BOAT - Term for the boat that must "give-way" to boats with the right-of-way.

CAPACITY PLATE - A plate that provides maximum weight capacity and engine horsepower rating information. It is located in full view of the helm.

CAPSIZE - To turn over.

**CAST-OFF** – To unfasten mooring lines in preparation for departure.

CENTER LINE - A lengthwise imaginary line which runs fore and aft with the boat's

**CHINE** – The point on a boat where the side intersects (meets) the bottom.

**CLEAT** – A deck fitting with ears to which lines are fastened.

**CONSOLE** – Also called helm. The steering wheel area of the boat.



CONTROLLER AREA NETWORK (CANBUS) - A robust bus standard designed to allow microcontrollers and devices to communicate with each other in applications without a host computer.

CRANKING BATTERY - The main battery used for engine starting and electrical

**CURRENT** – Water moving in a horizontal direction.

**DECK** – The open surface on the boat where the passengers walk.

**DEEP-CYCLE BATTERIES** – Special long-running batteries which can be repeatedly discharged and recharged without significant loss of power.

DIGITAL SELECTIVE CALLING (DSC) - A standard for sending pre-defined digital messages via the medium frequency (MF), high frequency (HF) and very high frequency (VHF) maritime radio systems. It is a core part of the Global Maritime Distress and Safety System (GMDSS).

**DOLLY WHEEL** – A rolling jack assembly at the front of the trailer used for positioning the coupler during trailer hookup.

**DRAFT** – The depth of the boat below the waterline, measured vertically to the lowest part of the hull.

ELECTRONIC LEAKAGE CIRCUIT INTERRUPTER (ELCI) - Installed with or in addition to the main shore power disconnect circuit breaker(s) to offer an additional level of protection from shore power faults.

ELECTRONIC NAUTICAL CHARTS (ENCS) - Vector data sets that support all types of marine navigation.

**ELECTROLYSIS** – The breakup of metals due to the effects of galvanic corrosion. EMERGENCY POSITION INDICATING RADIO BEACONS (EPIRBS) - Safety devices carried by a vessel to alert search and rescue services and allow them to guickly locate you in the event of an emergency.

**FATHOM** – Unit of depth or measure; 1 fathom equals 6 feet.

FENDERS - Objects placed alongside the boat for cushioning. Sometimes called bumpers.

**FORE** – Toward the front or bow of the boat. Opposite of aft.

**FREEBOARD** – The distance from the water to the gunwale.

FUEL SENDING UNIT - The electrical device that is mounted on the outside of a built-in fuel tank and controls the dashboard fuel gauge.

GIVE-WAY BOAT - (1) Term for the boat that must take whatever action necessary to keep well clear of the boat with the right-of-way in meeting or crossing situations. (2) The burdened boat.

GLOBAL MARITIME DISTRESS AND SAFETY SYSTEM (GMDSS) - An internationally agreed-upon set of safety procedures, types of equipment, and communication protocols used to increase safety and make it easier to rescue distressed ships, boats and aircraft.

GLOBAL POSITIONING SYSTEM (GPS) - A global navigation satellite system that provides geolocation and time information to a GPS receiver.

GROUND FAULT CIRCUIT INTERRUPTER (GFCI) - A type of circuit breaker that measures current flow in the hot and neutral wires and immediately switches the electricity off if an imbalance of current flow is detected.

#### **GLOSSARY OF NAUTICAL TERMS**

**GUNWALE** – The rail or upper edge of a boat's side.

**HEAD** – A marine toilet.

**HELM** – The steering wheel or command area.

**HULL** - The body of the boat.

HYPOTHERMIA - A physical condition where the body loses heat faster than it can produce it.

**IN-LINE FUSE** – A type of protective fuse located in the power wire of a direct current (DC) circuit usually near the battery.

**KEEL** – The lowest portion of the boat; extends fore and aft along the boat's bottom.

**LIFE JACKET** – A buoyant, wearable jacket that, when properly used, will support a person in the water; also see PFD.

**LIST** – Leaning or tilt of a boat toward the side.

MAKING WAY - Making progress through the water.

MARINE CHART - Seagoing maps showing depths, buoys, navigation aids, etc.

**MOORING** – An anchor, chain or similar device that holds a boat in one location.

NATIONAL MARINE ELECTRONICS ASSOCIATION (NMEA) - A U.S.-based marine electronics trade organization setting standards of communication between marine electronics.

NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION (NOAA) - An American scientific agency within the United States Department of Commerce that focuses on the conditions of the oceans, major waterways and the atmosphere.

NAVIGATION AID - Recognizable objects on land or sea such as buoys, towers or lights which are used to fix position to identify safe and unsafe waters.

NMMA - National Marine Manufacturers Association.

**NO-WAKE SPEED** – The speed at which a boat travels to produce an imperceptible wake.

PASSIVE HYDROLOCK - A problem that occurs when water siphons through the boat's exhaust system, enters a cylinder in the engine and results in an engine starting failure. This problem is possible on any marine vessel powered by a combustible engine with exhaust risers that sit below the waterline.

**PFD** – A buoyant personal flotation device used to support a person in the water: also see Life Jacket.

**PITOT TUBE** – See Speedometer Pickup Tube.

PLANING HULL - A hull designed to lift, thereby reducing friction and increasing efficiency.

PORPOISE - A condition in which the bow bounces up and down caused by trimming the engine too far out.

**PORT** – (1) The left side of a boat when facing the bow. (2) A destination or harbor.

**PRIVILEGED BOAT** – Term used for the boat with the right-of-way.

**RIGHT-OF-WAY** – Term for the boat that has priority in meeting or crossing situations. The stand-on or privileged boat.

**RULES OF THE ROAD** – Regulations for preventing collisions on the water. SPEEDOMETER PICKUP TUBE - Also called pitot tube. The plastic device that extends below the bottom of the boat. It connects to the speedometer with plastic flexible tubing.



SPLASHWELL - The section of an outboard-equipped boat that is just forward of

STAND ON BOAT - Term for the boat that must maintain course and speed in meeting or crossing situations. The privileged boat.

**STARBOARD** – The right side of the boat when looking toward the bow.

STERN - The back of the boat.

STOW - To pack the cargo.

STRONG POINT- A dedicated eye specially reinforced for the attachment of mooring lines, anchor chains, anchor lines and tow lines.

**SURGE BRAKES** – A type of trailer braking system designed to automatically actuate when the tow vehicle's brakes are applied.

TRANSDUCER - The unit that sends/receives signals for the depth sounder.

**TRANSOM** – The transverse beam across the stern.

**TRIM** – Fore to aft and side to side balance of the boat when loaded.

**UNDERWAY** – Boat in motion; i.e., not moored or anchored.

**USCG** - United States Coast Guard.

**V-PAD** – A modified vee-hull design with a small, flat area in the keel aft.

VISUAL DISTRESS SIGNAL - A device used to signal the need for assistance such as flags, lights and flares.

**WAKE** – The waves that a boat leaves behind when moving through the water.

**WATERWAY** – A navigable body of water.

# **INDEX**

Numerics	Boarding and courtesy light
5-pin wiring connector8-5	switches 9-17
. •	Boarding switches9-17
Α	Boat features and options9-1
About this manual1-1	Boat flags5-4
About your new boat1-2	Boat loading7-3
ABS plastic panels10-22	Boat operator, occupants and
Accelerating and running	participants2-35
underway7-14	Boat owner / operator
Accessory ports9-15	responsibilities3-1
Accessory switch9-17	Boat Owners Association of The
Accidents 3-2, 4-6	United States1-5
Accidents, collisions and giving	Boat system failure 4-6
assistance4-6	Boat terminology1-2
After refueling7-9	Boating accident3-2
Aids to navigation6-5	Boating equipment10-3
Alcohol3-3	Boating regulations and your
Aluminum hardware10-24	responsibilities3-1
Aluminum pontoons and hulls10-5	Boating under the influence 3-3
America's Waterway Watch3-6	BoatU.S. Foundation for Boating
American Boat & Yacht Council1-5	Safety Hotline1-6
American Red Cross1-5	Bridges and shipping channels 3-5
Anchor7-25	Buffing10-16
Anchor line7-25	Buoys 6-5, 6-6, 6-9,
Anodes10-4, 10-6, 11-2	6-10, 6-11, 6-12
Antifouling bottom paint10-15	С
Aquatic Invasive Species (AIS)3-8	Cabana enclosures7-24
Aquatic vegetation/weeds5-3	Canopy sun tops7-23
Audible (sound) signals 2-26, 6-5	Canvas covers and bimini
Audible signaling	tops10-19
devices 2-18, 2-26	Capacity plate7-3
Audible signals6-5	Capsizing and flooding4-5
В	Carbon monoxide (CO)2-16, 2-34
Backing up8-12	Carpet 10-21
Basic safety rules2-1	Certification standards1-3
Batteries10-9	Charging system9-1
Battery 9-1, 9-2	Checks after operation7-16
Before getting underway7-1	Circuit breakers and fuses 10-11
Before refueling7-8	Cleaners 10-16
Bell6-5	Cleaning10-16
Bilge pump10-13	Cleaning agents3-9
Bilge pump system9-21	Cold water 5-2
Boarding7-3	Cold weather5-2
3	Collision 4-6



zones	-1 16 -3 -5 -3 17 22 -1 -2
Cruising limitations2-	32
Dams and spillways5	-3
Danger signal6	-5
Dangerous weather4	-6
Daymarks/Dayboards6-7, 6-	10
DC system9	-1
Debris5	-3
Design category1	
Diameter9	
Disclaimer1	-4
Display panels9-	11
Distress signaling devices4	-1
Distress signals 6	-5
Docking7-	19
Docking lights switch9-	
Drain plug11	-2
Driving defensively2-	30
Drugs3	
Dual-prop drives9-	10
E	
Electric steering9	-8
Electric supply9	-1
Electrical system9-1, 10	-8
Electrolysis10	-3
Emergencies 3-4, 4-1, 4	-7
Emissions3-	
Engine10-	13
Engine cooling system9-3, 11	-3
Engine emergency stop switch	
and lanyard2-20, 9	-6
Engine lubrication system9	-2

Engine or boat system failure Engine-transom support bracket Exhaust emissions	4-6 8-6 .3-10
F	
<del>-</del>	40.0
Fasteners	. 10-8
Fire and explosion	4-3
Fire extinguisher2-19,	2-20
Fires	.2-20
First aid/medical emergencies Fishing	4-1
Fishing	3-6
Fishing models	.9-21
Fishing seats	.9-22
Flags	5-4
Float plan	7-1
Float switch1	0-13
Flooring10-20, 1	0-21
Fog conditions	5-2
Fogging oil	.11-2
Freezing temperatures 5-2,	11-1
Fogging oil5-2, Freezing temperatures5-2, Fuel (gasoline)7-5, 7-6, 1	0-13
Fuel filler	7-8
Fuel level gauge	.9-12
Fuel management	7-5
Fuel stabilizer	
Tuel euppliere	7 5
Fuel system9-2, 9-3, 1	0-13
Fuel1	0-13
Fuel filter1	
Fuel tanks	9-3
Fuel-burning appliances	
Fueling	5. 7-6
Fueling7-5	,, 10-11
G	
Galvanic corrosion	.10-3
Gauges	.9-10
Gauges/Instruments	
Gelcoat1	
General care and maintenance	.10-1
General cleaning and	
maintenance1	0-15
General operation of fuel-burning	
appliances	.9-19
Getting underway	

Glossary of nautical terms13-1 Good boating practices2-1	Lighthouses6- Lights9-1	7
Gross Vehicle Weight Rating (GVWR)8-2	Lights and lighted structures 6- Lights switch9-1	7
Н	Lines and knots7-2 Loading guidelines8-1	
Harbor flags and indicators5-5 Hardware, fasteners and	M	
fittings10-8	Maintenance10-	
Hazard2-5, 5-2, 5-4	Maintenance schedule 10-2	
Hazard information2-33	Man overboard (MOB)4-	-4
Helm7-11	Manatee 6-1	1
Helm and control switches9-16	Marine Assistance Request	_
Hitch ball and trailer coupler8-3	Broadcast (MARB)4-	-2
Horn6-5	Marine growth10-1	5
Horn switch9-17	Markers 6-5, 6-8, 6-1	1
Hour meter9-15	Markers, warnings and	,
Hull	advisories5-	-4
Hull identification number1-2	Mayday4-	
Hull identification, capacity and	Mechanical steering9-	۰/
safety plates1-2 Hurricane and severe weather	Medical emergencies4-	
preparedness4-9	Meeting head-on6- Mildew10-1	
Hydraulic steering9-8	Minimum onboard personal	'
Hypothermia 4-1, 5-2	safety equipment2-1	Я
• • • • • • • • • • • • • • • • • • •	Minor lights6-7, 6-1	'n
I	Minors 3-	
Icy waters5-2	Monofilament fishing line3-	
Ignition switch9-17	Mooring7-2	
Inclement weather5-2	Mooring and trailering covers 10-2	
Inflatables/tube tips2-38	Mooring buoys6-	
Insurance3-2	Mooring cover7-2	
Isolated danger markers6-12	Motor pod10-1	3
K	Multi-gauges9-1	2
Know water sports hand	N	
signals2-36	National Association of State	
Knowing the boat2-31	Boating Law Administrators 1-	-6
1	National Marine Manufacturers	
Lateral markers6-10	Association1-	-6
Launching8-12	National Oceanic and	
Law of salvage4-8	Atmospheric Administration's	
Legal considerations8-1	National Weather Service1-	-6
Life jackets2-18, 2-21, 10-2	National Safe Boating	
Lifting11-1	Council Inc1-	-6



nautical terminology	
Naval vessel protection zones	3-5
Navigation lights switch	. 9-17
Navigation markers	5-4
Navigation rules and aids	6-1
Navigational lights	. 2-26
Navigational lights and night	
operation	. 6-13
Negligent operation	3-4
Neutral start safety switch	
Noise	
Non-skid flooring	
•	
0	
Observer	
Oil level gauge	. 9-13
Operating in hazardous conditions	
conditions	5-1
Operating the boat	
Operating under the influence	3-3
Operation by minors	
Operator's license and	
education	3-3
Organizations	1-5
Outboard engine fueling	
considerations	7-9
Overtaking/passing	6-4
P	
•	0.0
Paints	
Passengers	. 7-10
People with handicaps and	0.00
elderly people	. 2-32
Performance	
Performance operation	. 7-19
Personal location beacon	
(PLB)	. 2-30
Pets	
Pitch	
Planing	. 7-14
Platform dragging	. 2-34
Playpen cover	
Pontoon boat considerations	
Power trim	. 7-16
Pre-departure safety checklist	7-2

Pregnant women	2-32
Pregnant womenPropane gas grill	 
Propeller selection and	9-20
replacement guidelines	0.0
Propellers	ə-ə
Protecting the boat from theft	9-0, 9-9
Protecting the environment	3-0
Publications	1-5
R	
Range lights	6-7
Range markers	6-9
Raw water washdown	9-23
Re-boarding ladder	
Reduced visibility	0 20 5-2
References and contact	
nformation	1-5
Refueling	
Refueling built-in fuel tanks	7 0 7-9
Registration	
Registration certificates	
Registration numbers	3-2
Regulations 3-3, 3-7,	3-0 6-1
Regulatory markers	6-0
Reporting accidents	0-3 4_6
Reporting safety defects	0- <del>1</del>
Poguacting accietance	0-13
Requesting assistance ( non-distress call)	4.0
Required boating safety	4-2
equipment and regulations	2 10
Restricted areas	2
Right-of-way	0-1
Rotational thrust	/-12
Rules of the road	6-1
Running aground	4-5
S	
Sacrificial anodes	10-6
Safe water markers	6-11
Safety2-1,	3-1. 7-3
Safety and training	2-4
Safety chains	8-4
Safety equipment2-28, 7	-1. 10-1
Safety guidelines	2-2
Safety label locator	

Safety labels	2-5
Safety precautions	
Safety standards	1-3
Safety statements	
Safety systems	9-6
Saltwater corrosion	10-4
Maintenance	10-5
Sea Tow Services	
International, Inc	1-6
Seals in the engine lower unit	
Security	3-5
Security zones	3-5
Severe weather	5-1
Shallow water	5-3
Shallow water operation	5-3
Shift and throttle controls	9-3
Shift and throttle controls7-12, 9-4	0 0
Shock	5-2
Show lighting	2-27
Signs	6-11
Single-lever controls - single or	0-11
twin engine	Q_/
Situational awareness	2-30
Small boats and swimmers	2-31
Special markers	6-9
Special needs passengers	2-31
Speed	3-7
Speed limits	3-7
Speedometer	9-13
Spillways	5-3
Spotter	2-36
Stainless steel and chrome	2 00
hardware1	0-23
Starting	7-10
Static electricity and the fuel	, 10
system	7-5
Steering	7-11
Steering system 9-7, 1	n-14
Stonning	7-13
Storping	11_5
Storing	11_1
Storm conditions	5-1
Storm warning	5-1 5-1
Strong points	0-4 2_1
Summer storage	11_1
ournine storage	11-4

Surge brakes	8-5
Switches	9-16
Symbols	9-24
Т	
Tachometer	0 10
The general prudential rule	9-13
The general prudential rule	6-1
Throttle9-3	
Throttle controls Thru-hull fittings	
Toddlers Towing hitch	2-31 0 0
Towing on the water	0-2 7
Towing on the water	
Trailer8-1, 1	o-2
Trailer brakes	0-25 Q 5
Trailer classification	O-J
Trailer gross vehicle weight	0-1
rating	8_2
Trailer regulations	0-∠ Ω_1
Trailer regulations	2-11
Trailer type	
Trailer type	0−1 2_1
Trailering guidelines	0-1 8-6
Transom saver	0-0 8-5
Trim and tilt	
Trim/tilt gauge	
Trim/tilt gadge	9-16
Troubleshooting	
Type B fire extinguishers	2-20
•	2 20
U	
U.S. Coast Guard (USCG)1-6	, 3-1
U.S. Coast Guard Auxiliary	1-6
U.S. Coast Guard Navigation	
Center (NAVCEN)	1-6
U.S. Coast Guard Office of	
Boating Safety	1-6
U.S. Coast Guard safety	
standards compliance plate	1-3
U.S. Coast Guard's America's	
Waterway Watch Program	1-7
U.S. Government Publishing	
Office	1-7
LLS Power Squadrons	1-7



System (USATONS)	10-17
ladder	. 2-40
V	
Vegetation	5-3
Vehicle towing hitch	8-2
Very high frequency (VHF)	
radio	. 2-29
Vinyl care and cleaning guide	10-18
Vinyl upholstery	10-17
Visibility	5-2
Visual distress signaling (VDS)	
devices2-18	
Visual distress signals (VDS)	
Voltmeter	. 9-14
W	
Wake	
Washing10-16,	10-17
Water depth gauge	. 9-15
Water hazards	
Water pressure gauge	. 9-14
Water sports	
Water sports and towing safety .	
Water sports guidelines	. 2-35
Water sports responsibility	
code	
Water sports safety	
Water temperature gours	
Water temperature gauge4-	.9-14
Whistle4-	
Windshield	
Winterization and storage	
Winterizing	11_1
Winterization and storage	. 1 1-1
preparation	11-2
p. opa. auo	

# **SERVICE / MAINTENANCE LOG**

DATE	HOUR READING	SERVICE / REPAIRS PERFORMED

## **SERVICE / MAINTENANCE LOG**

DATE	HOUR READING	SERVICE / REPAIRS PERFORMED

#### **BATTERY MAINTENANCE LIST**

The boat may be equipped with any number of sensors, systems, electronics or equipment that have batteries and must be periodically checked to assure proper performance. Use this form as a handy reference for these items such as EPIRBs, handheld electronics, automatic fire extinguishers, CO detectors, etc.

ITEM	FREQUENCY	DATE CHECKED	BATTERY TYPE	REPLACEMENT DATE	NOTES

# Make it last.

#### **Godfrey Pontoons**

4500 Middlebury St Elkhart, IN 46516 godfreypontoonboats.com Part Number 473548

