



Optional accessories shown on vehicle


THE NEW WORK UTV STANDARD

The PRO XD provides industry-leading durability, serviceability and safety to deliver a utility vehicle built to withstand the toughest work environments, and ultimately, provide customers with increased durability, lower maintenance costs and improved safety features.



DURABILITY

- Heavy-duty driveline components resist corrosive conditions
- Heavy-duty suspension for industry-leading towing and payload
- Kubota® industrial tier 4 diesel engine
- Heavy-duty seat material resists punctures and tears
- Heavy-duty clutch improves belt life
- Hard surface jobsite tire for puncture and wear resistance

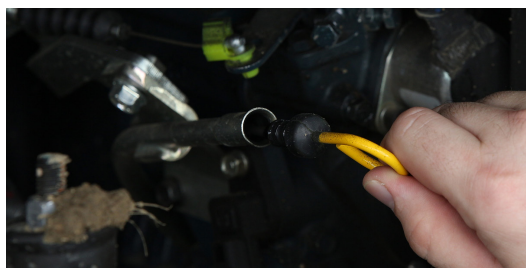

SERVICEABILITY

- 200 hour maintenance interval
- Front air intake for cleaner air ingestion
- Side access to air filter and dipstick for daily service checks
- Digital display with alarms to notify user of critical faults
- 4 same size tires, non-directional for easy replacement
- Common key sets for easy vehicle fleet management



SAFETY

- Speed limit for jobsite compliance
- Orange seat belts and decals for high visibility
- Wider foot wells for easier ingress/egress
- Standard safety features include
 - Backup alarm
 - Horn
 - Mechanical parking brake
 - Start in park with foot on brake

DIESEL SPECIFICATIONS

Engine & Drivetrain	2000D	4000D
Air Intake	Front Air Intake with Donaldson® Cyclonic Air Filter	
Cooling	Liquid	
Cylinders Displacement	898 cc	
Drive System Type	4x2, AWD	AWD - Ultra Turf
Engine Braking System (EBS)	Standard	
Engine Type	3-cylinder Kubota® Diesel	
Fuel System/Battery	Mechanical Injection	
Horsepower	24.5 HP	
Maintenance Interval	200 Hours (50 Hour Initial)	
Transmission/Final Drive	Automatic PVT H/L/N/R/P; Shaft	
Dimensions & Capacity	2000D	4000D
Bed Box Dimensions (LxWxH)	43.5 x 54 x 11.5 in (110.5 x 137 x 29 cm)	
Box Cargo Capacity	1,250 lbs (567 kg)	
Estimated Dry Weight	1,595 lbs (723 kg)	1,925 lbs (873 kg)
Fuel Capacity	11.5 gal (43.5 L)	
Ground Clearance	11 in	
Overall Vehicle Size (LxWxH)	126 x 62.5 x 75 in (320 x 159 x 191 cm)	157 x 62.5 x 75 in (399 x 159 x 191 cm)
Payload Capacity	1,930 lbs (875 kg)	2,075 lbs (941 kg)
Person Capacity	2	4
Towing Capacity	2,500 lbs (1,134 kg)	
Wheelbase	85 in (215.9 cm)	117 in (297.2 cm)
Brakes	2000D	4000D
Front/Rear Brakes	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	
Parking Brake	Park in Transmission	
Additional Specifications	2000D	4000D
Cargo System	Lock & Ride®	
Front Suspension	9 in (22.9 cm)	
Hitch Towing Rating	2,500 lb (1,133.9 kg)	
Hitch Type	Standard 2 in (5 cm) Receiver	
Instrumentation	All Digital Gauge, Speedometer, Odometer, Tachometer, 2 Tripmeters, Hour Meter, Gear Indicator, Diff lock Indicator, Fuel Gauge, Engine Temperature, Hi-Temp Light, Clock, Clutch Belt Slip Warning, Glow Plug Indicator, Low Oil Pressure Indicator, Seat Belt Indicator	
Lighting	55W low / 60W high, LED Tail	
Other Standard Features	Horn, Backup Alarm	
Rear Suspension	9 in (22.9 cm)	
Seat Covering	Kevlar®-Backed Vinyl (Grey)	
Tilt Steering	Standard	
Top Speed	26 mph, 15 mph speed kit optional	
Tires/Wheels	2000D	4000D
Electronic Power Steering	Not Equipped	Standard
Front Tires	26 x 10-12 Duro® DI-2042 Power Grip (M/T)	
Hubs	Front: Steel; Rear: Ductile Iron	
Rear Tires	26 x 10-12 Duro® DI-2042 Power Grip (M/T)	
Wheels	12 x 6 HD Steel - Gloss Black	

PRO XD 2000D



PRO XD 4000D



For more information or to find out how Polaris PRO XD's industry-leading durability, serviceability and safety can impact your fleet's productivity, contact one of our UTV experts today.

[POLARIS.COM/GOV](https://polaris.com/gov)

Warning: Polaris PRO XD vehicles can be hazardous to operate and are not intended for on-road use. All riders should always wear head protection – such as hard hats or a helmet – that is appropriate for operating conditions and intended usage, considering factors such as intended speed, unevenness of terrain, turns in path, weather, obstacles, and other traffic. Always use seat belts and close doors (as equipped). Never engage in stunt driving, and avoid excessive speeds and sharp turns. Riding and alcohol/drugs don't mix. All riders should take a safety training course. Call 800-342-3764 for additional information. Part#9948031

Unless noted, trademarks are the property of Polaris Industries Inc. Donaldson® is a registered trademark of Donaldson Company, Inc. Duro® is a registered trademark of HWA Fong Rubber (USA) Inc. Kubota® is a registered trademark of Kubota Corporation. (Kevlar® is a registered trademark of E.I. du Pont de Nemours & Company). ©2019 Polaris Industries Inc