



POLARIS[®]
OFF-ROAD VEHICLES



RANGER[®]

RZR

POLARIS
GENERAL[®]

SPORTSMAN[®]

POLARIS
ACE[®]

THE LEADER IN OFF-ROAD

For more than 30-years, Polaris® has been building the best off-road vehicles on earth. Vehicles that perform better, work harder, ride smoother, and deliver the ultimate riding experience.



UTILITY PG. 4

RANGER

CROSSOVER PG. 8

POLARIS
GENERAL

RECREATION PG. 10

RZR

ATV PG. 12

SPORTSMAN

ALL-NEW

POWER IN NUMBERS

82
HORSEPOWER

33 CM
GROUND CLEARANCE

1,134 KG
TOWING CAPACITY

COCKPIT ALL-NEW INTERIOR

- » **NEW SEATS**
Thicker, contoured seats for all-day comfort
- » **MORE STORAGE**
Flip-up passenger seat for more configurable storage
- » **DUAL GLOVE BOXES**
Designed for twice the storage
- » **MORE HOLDERS**
6 cup holders
- » **NEW DASHBOARD**
New digital / analog gauge cluster for maximum visibility and information

MORE RUGGED MORE REFINED MORE RANGER

Through an unrelenting pursuit of innovation, unmatched performance, and unyielding dependability, Polaris *RANGER*® has been the number one utility side-by-side for 9-years running. Now there's an entirely new *RANGER*® — more rugged, more refined, and fueled by over one hundred owner-inspired improvements.

INTRODUCING THE ALL-NEW **RANGER**
XP 1000

RANGER

GET MORE DONE

RANGER XP® 900 EPS



Delivering on our hardest working, smoothest riding promise, RANGER® offers the most powerful lineup, the best handling and the largest breadth of integrated accessories. You can do more, tow more, haul more and ride more.

RANGER® 500



AWD
TRUE ON-DEMAND

RANGER CREW® XP 1000 EPS



BUILT TO HAUL MORE

UP TO **454** KG
DUMPING CARGO BOX

UP TO **6** PERSON
SEATING CAPACITY

CHOOSE YOUR RANGER®

2-SEAT



MODEL SHOWN: RANGER® 500

COMPACT AND GREAT VALUE

- » 2-Seat Capacity
- » Up to 44 HP
- » 1,500 lb (680 kg) Towing Capacity
- » 25.4 cm Ground Clearance
- » 4 Models to Choose From

3-SEAT



MODEL SHOWN: RANGER XP® 1000 EPS

MAXIMUM PERFORMANCE AND CAPACITY

- » 3-Seat Capacity
- » Up to 82 HP
- » Up to 2,500 lb (1,134 kg) Towing Capacity
- » Up to 33 cm Ground Clearance
- » 4 Models to Choose From

CREW



MODEL SHOWN: RANGER CREW® XP 1000

COMFORTABLE SEATING FOR 4-6

- » Up to 80 HP
- » Up to 2,000 lb (907 kg) Towing Capacity
- » Up to 28.7 cm Ground Clearance
- » 5 Models to Choose From

ANY TASK ANY TRAIL



POLARIS GENERAL® 1000 EPS RIDE COMMAND® EDITION

Polaris GENERAL® is the perfect combination of premium-performance and never quit work-ethic, melded into the perfect balance side-by-side that is ready for Any Task. Any Trail. Anytime. Where the high-performance soul of RZR® and the hard-working heart of RANGER® meet, you'll find the uncompromising Polaris GENERAL®.



POLARIS GENERAL® 1000 EPS DELUXE

POWER IN NUMBERS

680 KG | **272 KG** | **100**
TOWING CAPACITY | DUMPING CARGO BOX | HORSEPOWER



POLARIS GENERAL® 4 1000 EPS

CLASS-LEADING CAPABILITIES

31.2 cm
FRONT SUSPENSION

33.5 cm
REAR SUSPENSION

30.5 cm
GROUND CLEARANCE

CHOOSE YOUR POLARIS GENERAL®

BASE



MODEL SHOWN: POLARIS GENERAL® 1000 EPS

- STANDARD GENERAL® FEATURES:**
- » 1000 ProStar® 100 HP Engine
 - » Standard Half-Doors
 - » Electronic Power Steering (EPS)
 - » Engine Braking System (EBS)
 - » Lock & Ride® Compatible

PREMIUM



MODEL SHOWN: POLARIS GENERAL® 1000 EPS PREMIUM

- BASE FEATURES PLUS:**
- » Automotive Paint
 - » Matte Black Cast Aluminum Wheels
 - » Low-Profile Front Bumper
 - » Polaris® HD 4,500 lb (2,041 kg) Winch

DELUXE



MODEL SHOWN: POLARIS GENERAL® 1000 EPS DELUXE

- PREMIUM FEATURES PLUS:**
- » FOX® 2.0 Podium X QS3 Shocks
 - » Polaris® Lock & Ride® Sport Roof
 - » MTX® Premium Soundbar
 - » Convex Rearview Mirror

4-SEAT



MODEL SHOWN: POLARIS GENERAL® 4 1000 EPS

- SAME AS PREMIUM PLUS:**
- » Seating for 4
 - » Low-Profile Front Bumper
 - » Polaris® HD 4,500 lb (2,041 kg) Winch
 - » NEW FOX® 2.0 Podium X QS3 Shocks
 - » 27" GBC® Dirt Commander 8-Ply Tires


FUEL YOUR PASSION

INTRODUCING THE ALL-NEW
RZR XP TURBO
DYNAMIX
 EDITION

DYNAMIX
 ACTIVE SUSPENSION

THE FUTURE OF RIDE AND HANDLING IS HERE

Introducing RZR DYNAMIX™ Active Suspension. The world's first and only intelligent suspension system designed for the off-road. RZR DYNAMIX™ electronically controls and adjusts shock damping to deliver the best ride in any terrain.

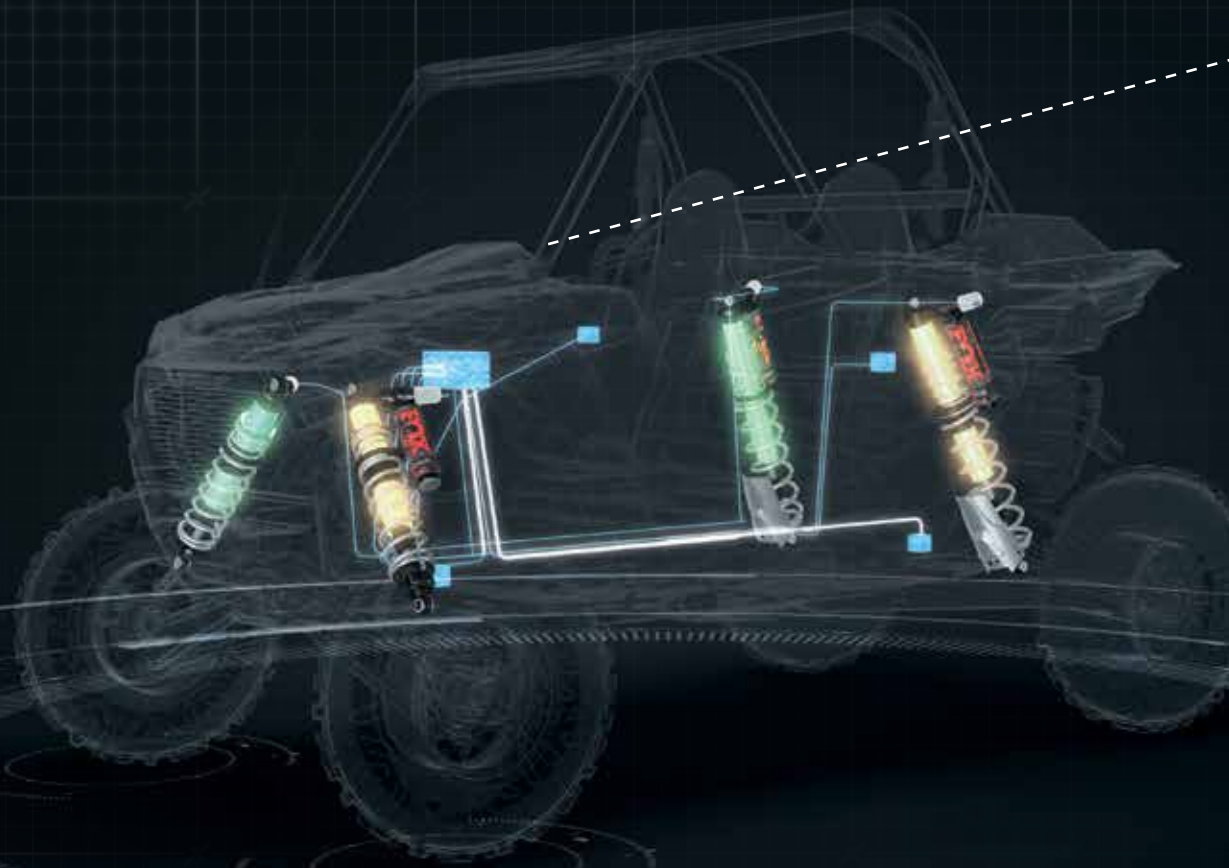

RZR DYNAMIX™ calculates 7-vehicle inputs over 200-times-per-second to deliver the best ride at any moment:

- » Vehicle Speed
- » Brake Pedal Position
- » Throttle Pedal
- » Mode Switch
- » Steering Wheel Position
- » Accelerometer
- » Gyroscope

ADJUSTS 200 TIMES-PER-SECOND

SMART SUSPENSION MEANS NO COMPROMISE

ON-THE-FLY ADJUSTMENTS FOR ANY SITUATION



// CORNERING



Attack a corner and the outside shocks instantly firm up to reduce body roll, keeping you flat for the most grip possible. RZR DYNAMIX™ is even smart enough to retune when you counter steer.

// SPEED



RZR DYNAMIX™ stiffens all shocks as speed increases for ultimate performance. You can floor it from a dead stop or throttle out of a corner and the rear shocks firm up to maximize HP as you rocket forward.

// AIRBORNE



When all four wheels leave the ground, RZR DYNAMIX™ is the perfect copilot ... As the wheels lift off, all four shocks go to maximum resistance. So you don't bottom out when you finally come back down to Earth.



POWER UP-TO **168 HP**



UNRIVALED **SUSPENSION**



AGILITY FOR ANY **TERRAIN**

CHOOSE YOUR RZR®

TRAIL-127 cm WIDE **SPORT-152 cm WIDE**



RZR® 570 EPS **45 HP** RZR® 900 EPS **75 HP** RZR® S 900 EPS **75 HP** RZR® S 1000 EPS **100 HP**

EXTREME PERFORMANCE-163 cm WIDE



RZR XP® 1000 EPS **110 HP** RZR XP® TURBO EPS **168 HP**
 RZR XP® TURBO DYNAMIX EDITION **168 HP**

MULTI PASSENGER



RZR® S 4 900 **75 HP** RZR XP® 4 1000 EPS **110 HP** RZR XP® 4 TURBO EPS **168 HP**

SEE FULL SPECIFICATIONS ON PAGE 18 »

SPORTSMAN®

HARDEST WORKING. SMOOTHEST RIDING.

This is the ATV that changed everything. With industry-leading power, payload, towing, suspension, premium features and accessories.



SPORTSMAN® XP 1000



SPORTSMAN XP® 1000

UNMATCHED WORK ETHIC

UP TO **90 HORSEPOWER** | UP TO **680 KG TOWING CAPACITY** | **163 KG CAPACITY RACK**



SPORTSMAN® 570 SP

LEGENDARY RIDE & HANDLING

AWD TRUE ON-DEMAND | UP TO **29.2 CM GROUND CLEARANCE**

CHOOSE YOUR SPORTSMAN®

REC/UTILITY

INDUSTRY'S BEST VALUE ATV

- » Up to 44 HP
- » Up to 1,500 lb (680 kg) Towing Capacity
- » True On-Demand AWD

SPORTSMAN® 570 EPS

SPORT/UTILITY

INDUSTRY LEADING PERFORMANCE

- » Up to 90 HP
- » High-Clearance Arched Dual A-Arms
- » High Performance On-Demand AWD

SPORTSMAN XP® 1000

2-UP

SAME BEST IN CLASS FEATURES PLUS SEATING FOR 2

- » Revolutionary Passenger Seat For Ultimate Comfort
- » 145 cm Wheel Base

SPORTSMAN XP® 1000

MUD & SPORT

PURPOSE BUILT FOR

- » Riding in Mud
- » Race-Inspired Scrambler*
- » Hunt Packages

SPORTSMAN XP® 1000 HIGH LIFTER® EDITION

YOUTH

IT'S THEIR TIME TO RIDE

- » For Riders Ages 6-14*
- » ATV, RZR and ACE Models for All Riding Styles
- » EFI Engines for Reliable Starting in Cold Weather

OUTLAW® 110

*Check your local laws regarding riding regulations for minors.

SEE FULL SPECIFICATIONS ON PAGE 20 »

SINGLE SEAT FREEDOM

Chart your own path with the unparalleled Polaris ACE. Nimble, powerful and comfortable, the Polaris ACE delivers a unique center-seat singular experience with the go anywhere capabilities of an ATV combined with the familiar controls of a side-by-side.



NEW! POLARIS ACE® 570 EPS

CHOOSE YOUR POLARIS ACE® SEE FULL LINE-UP AT POLARIS.COM



POLARIS ACE® 500

| | |
|------------------|------------------|
| Horsepower | 32 HP |
| Front Suspension | 8.2" Travel |
| EPS | Not Equipped |
| Towing | 1,500 lb |
| Wheelbase | 61.5" (156.2 cm) |
| Ground Clearance | 10" (26 cm) |



POLARIS ACE® 570 EPS

| | |
|------------------|------------------|
| Horsepower | 45 HP |
| Front Suspension | 9" Travel |
| EPS | Standard |
| Towing | 1,500 lb |
| Wheelbase | 61.5" (156.2 cm) |
| Ground Clearance | 10.25" (26 cm) |



POLARIS ACE® 900 XC

| | |
|------------------|------------------|
| Horsepower | 78 HP |
| Front Suspension | 12.3" Travel |
| EPS | Standard |
| Towing | Not Recommended |
| Wheelbase | 67.5" (171.5 cm) |
| Ground Clearance | 13" (33 cm) |

IF THEY LIKE TO RIDE, THEY'LL LOVE TO DRIVE

The industry's first single-seat youth model—the all-new Polaris Ace® 150 EFI is designed to give kids the joy of driving while providing safety features parents will love.



NEW! POLARIS ACE® 150 EFI

CHOOSE YOUR YOUTH MODEL SEE FULL LINE-UP AT POLARIS.COM

OUTLAW® 50 Ages 6+



OUTLAW® 110 EFI Ages 10+



SPORTSMAN® 110 EFI Ages 10+



PHOENIX 200 Ages 14+



POLARIS ACE® 150 EFI Ages 10+



RZR® 170 EFI Ages 10+



All youth models come standard with helmet, safety flag, parent adjustable speeds and other safety features.

RANGER® 2018 SPECIFICATIONS

2-SEAT

3-SEAT

CREW

SPECIAL EDITIONS

| |  |  |  |  |  |  |  |  |  |  |  |
|--------------------------------|---|---|---|---|--|--|--|---|---|---|---|
| | RANGER® EV AVAIL. EV LI-ION | RANGER® 500 | RANGER® 570 AVAIL. EPS | RANGER® 570 FULL-SIZE | RANGER XP® 900 AVAIL. EPS | RANGER XP® 1000 EPS AVAIL. BASE (SPECS. MAY VARY) | RANGER® DIESEL AVAIL. CREW | RANGER CREW® 570 AVAIL. EPS | RANGER CREW® 570 FULL-SIZE | RANGER CREW® XP 900 AVAIL. EPS | RANGER CREW® XP 1000 EPS |
| ENGINE / DRIVE TRAIN | Engine Type Single 48-Volt, High-Efficiency, AC-Induction Motor | ProStar® 500cc, 4-Stroke Single-Cylinder | ProStar® 567cc, 4-Stroke Single-Cylinder DOHC | ProStar® 567cc, 4-Stroke Single-Cylinder DOHC | ProStar® 875cc, 4-Stroke Twin-Cylinder DOHC | ProStar® 999cc, 4-Stroke Twin-Cylinder DOHC | 1028cc, 3-Cylinder Diesel | ProStar® 567cc, 4-Stroke Single-Cylinder DOHC | ProStar® 567cc, 4-Stroke Single-Cylinder DOHC | ProStar® 875cc, 4-Stroke Twin-Cylinder DOHC | ProStar® 999cc, 4-Stroke Twin-Cylinder DOHC |
| | Horsepower 30 HP | 32 HP | 44 HP | 44 HP | 68 HP | 82 HP | 24 HP | 44 HP | 44 HP | 68 HP | 80 HP |
| | Drive System On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | High-Performance On-Demand True AWD / 2WD/VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | High Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode |
| | Engine Braking System / Active Decent Control Not Equipped | Not Equipped | Not Equipped | Not Equipped | Not Equipped | Standard | Not Equipped | Not Equipped | Not Equipped | Not Equipped | Not Equipped |
| SUSPENSION | Front Suspension MacPherson Strut 9" (22.9 cm) Travel | MacPherson Strut 9" (22.9 cm) Travel | MacPherson Strut 9" (22.9 cm) Travel | MacPherson Strut 9" (22.9 cm) Travel | Dual A-Arm 10" (25.4 cm) Travel | Dual A-Arm 11.0" (27.94 cm) Travel | Dual A-Arm 10.0" (25.4 cm) Travel | MacPherson Strut 9" (22.9 cm) Travel | MacPherson Strut 9" (22.9 cm) Travel | Dual A-Arm 10.0" (25.4 cm) Travel | Dual A-Arm 10.0" (25.4 cm) Travel |
| | Rear Suspension Dual A-Arm, IRS 9" (22.9 cm) Travel | Dual A-Arm, IRS 10" (25.4 cm) Travel | Dual A-Arm, IRS 10" (25.4 cm) Travel | Dual A-Arm, IRS 10" (25.4 cm) Travel | Dual A-Arm, IRS 10" (25.4 cm) Travel | Dual A-Arm, IRS 11.0" (27.94 cm) Travel | Dual A-Arm, IRS 10.0" (25.4 cm) Travel | Dual A-Arm, IRS 10" (25.4 cm) Travel | Dual A-Arm, IRS 10" (25.4 cm) Travel | Dual A-Arm, IRS 10.0" (25.4 cm) Travel | Dual A-Arm, IRS 10.0" (25.4 cm) Travel |
| TIRES AND WHEELS | Front Tires 25 x 9-12; Carlisle® | 25 x 8-12; 489 | 25 x 8-12; 489 | 25 x 8-12; 489 | 25 x 10-12; 489 <i>Painted MDL: 26 x 9-12; PXT</i> | 27 x 9-12; Maxxis® MU51 | 25 x 10-12; 489 <i>26 x 9-12; PXT</i> | 25 x 10-12; 489 | 25 x 10-12; 489 | 26 x 9-12; PXT | 26 x 9-12; PXT |
| | Rear Tires 25 x 9-12; Carlisle® | 25 x 10-12; 489 | 25 x 10-12; 489 | 25 x 10-12; 489 | 25 x 11-12; 489 <i>Painted MDL: 26 x 11-12; PXT</i> | 27 x 11-12; Maxxis® MU51 | 25 x 11-12; 489 <i>26 x 11-12; PXT</i> | 25 x 10-12; 489 | 25 x 10-12; 489 | 26 x 11-12; PXT | 26 x 11-12; PXT |
| | Wheels Stamped Steel | Stamped Steel | Stamped Steel <i>Aluminum Black Xcelerator</i> | Stamped Steel | Stamped Steel <i>Painted MDL: Aluminum Black Xcelerator</i> | Aluminum Black Xcelerator 2.0 | Stamped Steel | Stamped Steel <i>Aluminum Black Xcelerator</i> | Stamped Steel | Stamped Steel | Aluminum Black Xcelerator |
| DIMENSIONS / CAPACITIES | Wheelbase 72" (182.9 cm) | 73" (185.4 cm) | 73" (185.4 cm) | 79" (202 cm) | 81" (206 cm) | 81" (206 cm) | 81" (206 cm) <i>113 (287 cm)</i> | 105" (266.7 cm) | 107" (272.6 cm) | 113" (287 cm) | 113" (287 cm) |
| | Dry Weight 1,350 lb (612 kg) <i>1,328 lb (602 kg)</i> | 1,065.92 lb (483 kg) | 1,073 lb (488 kg) <i>1,101.92 lb (501 kg)</i> | 1,070.85 lb (486 kg) | 1,324.36 lb (601 kg) <i>1,342 lb (610 kg)</i> | 1,565 lb (709.87 kg) | 1,430.68 lb (649 kg) <i>1,688.47 lb (766 kg)</i> | 1,326.24 lb (603 kg) <i>1,351.24 lb (614 kg)</i> | 1,392.52 lb (632 kg) | 1,612.03 lb (733 kg) | 1,636.03 lb (742 kg) |
| | Overall Vehicle Size (L x W x H) 110 x 58 x 73" (279 x 147 x 185 cm) | 110 x 58 x 73" (279 x 147 x 185 cm) | 110 x 58 x 73" (279 x 147 x 185 cm) | 114 x 60 x 74" (290 x 152 x 188 cm) | 116.5 x 60 x 73" (296 x 152 x 193 cm) | 120 x 62.5 x 77" (305 x 158 x 196 cm) | 116.5 x 60 x 76" (296 x 152 x 193 cm) <i>148.5 x 61 x 76" (377 x 155 x 193 kg)</i> | 142 x 60 x 73" (361 x 152 x 185 cm) | 146 x 60 x 74" (370 x 152 x 188 cm) | 148 x 61 x 76" (375 x 155 x 193 cm) | 148 x 61 x 76" (375 x 155 x 193 cm) |
| | Ground Clearance 10" (25.4 cm) | 10" (25.4 cm) | 10" (25.4 cm) | 10.5" (26.7 cm) | 12" (30.5 cm) | 13" (33 cm) | 12" (30.5 cm) <i>11.3 (28.7 cm)</i> | 10" (25.4 cm) | 10.5" (26.7 cm) | 11.3" (28.7 cm) | 11.3" (28.7 cm) |
| | Seating Capacity 2 | 2 | 2 | 3 | 3 | 3 | 3 / 6 | 4 | 6 | 6 | 6 |
| | Fuel Capacity N.A. | 9 gal (34.1 L) | 9 gal (34.1 L) | 9 gal (34.1 L) | 10 gal (37.9 L) | 11.6 gal (43.9 L) | 10 gal (37.9 L) | 9 gal (34.1 L) | 9 gal (34.1 L) | 10 gal (37.9 L) | 10 gal (37.9 L) |
| | Bed Box Dimensions (L x W x H) 32 x 42 x 11.5" (81 x 107 x 29 cm) | 32 x 42 x 11.5" (81 x 107 x 29 cm) | 32 x 42 x 11.5" (81 x 107 x 29 cm) | 36.5 x 54 x 11.5" (93 x 137 x 29 cm) | 36.5 x 54 x 11.5" (93 x 137 x 29 cm) | 36.75 x 54.25 x 12.5" (93.3 x 137.8 x 31.75 cm) | 36.5 x 54 x 11.5" (93 x 137 x 29 cm) | 32 x 42 x 11.5" (81 x 107 x 29 cm) | 36.5 x 54 x 11.5" (93 x 137 x 29 cm) | 36.5 x 54 x 11.5" (93 x 137 x 29 cm) | 36.5 x 54 x 11.5" (93 x 137 x 29 cm) |
| | Box Capacity 500 lb (226.8 kg) | 500 lb (226.8 kg) | 500 lb (226.8 kg) | 800 lb (363 kg) | 1,000 lb (453.6 kg) | 1,000 lb (453.6 kg) | 1,000 lb (453.6 kg) | 500 lb (226.8 kg) | 800 lb (363 kg) | 1,000 lb (453.6 kg) | 1,000 lb (453.6 kg) |
| | Payload Capacity 1,000 lb (453.6 kg) | 1,000 lb (453.6 kg) | 1,000 lb (453.6 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) <i>1,750 lb (793.8 kg)</i> | 1,250 lb (567 kg) | 1,500 lb (680.4 kg) | 1,750 lb (793.8 kg) | 1,750 lb (793.8 kg) |
| | Hitch Towing Rating 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 2,000 lb (907.2 kg) | 2,500 lb (1,133.9 kg) | 2,000 lb (907.2 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 2,000 lb (907.2 kg) | 2,000 lb (907.2 kg) |
| FEATURES | Electronic Power Steering Not Equipped | Accessory Option | Accessory Option / Standard | Available | Accessory Option / Standard | Standard | Not Equipped | Accessory Option / Standard | Not Equipped | Accessory Option / Standard | Standard |
| | Adjustable Driver's Seat Not Equipped | Not Equipped | Not Equipped | Not Equipped | Not Equipped <i>Painted MDL: Standard</i> | Standard | Not Equipped | Not Equipped | Not Equipped | Not Equipped | Standard / *Polaris Pursuit® Camo not equipped |
| | Tilt Steering Standard | Standard | Standard | Standard | Standard | Standard | Standard | Standard | Standard | Standard | Standard |
| | Color Avalanche Grey, Polaris Pursuit® Camo <i>Polaris Pursuit® Camo</i> | Sage Green, Solar Red | Sage Green, Polaris Pursuit® Camo <i>Navy Blue Metallic</i> | Solar Red, Sage Green | Sage Green, Polaris Pursuit® Camo <i>Solar Red, Sage Green, Radar Blue, Matte Titanium Metallic</i> | Sunset Red, Suede Metallic, Matte Titanium Metallic, Polaris Pursuit® Camo, <i>Sage Green</i> | Sage Green <i>Sage Green</i> | Sage Green, Polaris Pursuit® Camo <i>Navy Blue Metallic</i> | Sage Green | Sage Green <i>Polaris Pursuit® Camo</i> | Sunset Red, Suede Metallic, <i>Polaris Pursuit® Camo</i> |



**NORTHSTAR EDITION
RANGER XP 1000 FEATURES PLUS:**

- » Premium Ranger Pro Shield™ Cab
- » Fixed-Glass Windshield with Wiper
- » Rear Glass Panel
- » Dome Light, Rearview Mirror
- » Heat, AC, Defrost
- » Cut-And-Sew Seats



**NORTHSTAR CREW EDITION
RANGER CREW XP 1000 FEATURES PLUS:**

- » Premium RANGER® Cab
- » Fixed-Glass Windshield with Wiper
- » Rear Glass Panel
- » Dome Light, Rearview Mirror
- » Heat, AC, Defrost
- » Cut-And-Sew Seats

















**HIGH LIFTER EDITION
RANGER XP 1000 FEATURES PLUS:**

- » Mud-Specific Gearing
- » High-Mount Air Intake and Vent Lines
- » 32.5 cm Ground Clearance
- » 28" High Lifter Outlaw® 2 Tires
- » Polaris® HD 4,500 lb (2,041 kg) Winch



**HIGH LIFTER CREW EDITION
RANGER CREW XP 1000 FEATURES PLUS:**

- » Mud-Specific Gearing
- » High-Mount Air Intake and Vent Lines
- » 32.5 cm Ground Clearance
- » 28" High Lifter® Outlaw 2 Tires
- » Polaris® HD 4,500 lb (2,041 kg) Winch

| | TRAIL | | | | SPORT | | | XTREME | | | MULTI | | | | |
|---|---|---|---|--|---|---|---|---|---|---|---|---|---|---|---------------------------|
| |  |  |  |  |  |  |  |  |  |  |  |  |  |  | |
| ENGINE / DRIVE TRAIN | Engine Type | ProStar® 570; 4-Stroke DOHC Single-Cylinder | ProStar® 570; 4-Stroke DOHC Single-Cylinder | ProStar® 900; 4-Stroke DOHC Twin-Cylinder | ProStar® 900; 4-Stroke DOHC Twin-Cylinder | ProStar® 900; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000 H.O.; 4-Stroke DOHC Twin-Cylinder | ProStar® Turbo H.O.; 4-Stroke DOHC Twin-Cylinder Turbocharged | ProStar® Turbo H.O.; 4-Stroke DOHC Twin-Cylinder Turbocharged | ProStar® 900; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000 H.O.; 4-Stroke DOHC Twin-Cylinder | ProStar® Turbo H.O.; 4-Stroke DOHC Twin Cylinder Turbocharged | ProStar Turbo H.O.; 4-Stroke DOHC Twin Cylinder Turbocharged | |
| Horsepower | 45 HP | 45 HP | 75 HP | 75 HP | 75 HP | 75 HP | 100 HP | 110 HP | 168 HP | 168 HP | 75 HP | 110 HP | 168 HP | 168 HP | |
| Drive System | True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2 WD / VersaTrac Turf Mode | True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High Performance True On-Demand AWD/2WD | High-Performance True On-Demand True AWD / 2WD | |
| Engine Braking System | Not Equipped | Standard | Standard | Standard | Standard | Standard | Standard | Not Equipped | Not Equipped | Not Equipped | Not Equipped | Not Equipped | Not Equipped | Not Equipped | |
| SUSPENSION | Front Suspension | Dual A-Arm with Stabilizer Bar and 9" (22.9 cm) Travel | Dual A-Arm with Stabilizer Bar and 9" (22.9 cm) Travel | Dual A-Arm with Stabilizer Bar and 10" (25.4 cm) Travel | Dual A-Arm with Stabilizer Bar and 10" (25.4 cm) Travel | Dual A-Arm and 12.25" (31.1 cm) Travel | Dual A-Arm with Stabilizer Bar 12.25" (31.1 cm) Travel | Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel | Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel | Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel | Dual A-Arm with Stabilizer Bar 12.25" (31.1 cm) Travel | Dual A-Arm with 16" (40.6 cm) Travel | Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel | Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel | |
| Front Shocks | ZF Sachs® | ZF Sachs® | ZF Sachs® | ZF Sachs® | FOX® 2.0 PERFORMANCE PODIUM | 2" Walker Evans® Needle | 2" Walker Evans® Needle | 2" Walker Evans® Needle with 16-Position Adjustable Clickers | 2" Walker Evans® Needle with 16-Position Adjustable Clickers | FOX® 2.5 PODIUM LSC Internal Bypass | FOX® 2.0 PODIUM X | 2" Walker Evans® Needle with 16-Position Adjustable Clickers | 2" Walker Evans Needle with 16-Position Adjustable Clickers | FOX® 2.5 PODIUM LSC Internal Bypass | |
| Rear Suspension | Dual A-Arm with Stabilizer Bar and 9.5" (24 cm) Travel | Dual A-Arm with Stabilizer Bar and 9.5" (24 cm) Travel | Dual A-Arm with Stabilizer Bar and 10" (25.4 cm) Travel | Dual A-Arm with Stabilizer Bar and 10" (25.4 cm) Travel | Dual A-Arm and 13.2" (33.5 cm) Travel | Dual A-Arm with Stabilizer Bar and 13.2" (33.5 cm) Travel | Dual A-Arm with Stabilizer Bar and 13.2" (33.5 cm) Travel | Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel | Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel | Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel | Dual A-Arm with Stabilizer Bar 13.2" (33.5 cm) Travel | Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel | Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel | Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel | |
| Rear Shocks | ZF Sachs® | ZF Sachs® | ZF Sachs® | ZF Sachs® | FOX® 2.0 PERFORMANCE PODIUM | 2" Walker Evans® Needle | 2" Walker Evans® Needle | 2.5" Walker Evans® Needle with 16-Position Adjustable Clickers | 2.5" Walker Evans® Needle with 16-Position Adjustable Clickers | FOX® 3.0 PODIUM LSC Internal Bypass | FOX® 2.0 PODIUM X | 2.5" Walker Evans® Needle with 16-Position Adjustable Clickers | 2.5" Walker Evans Needle with 16-Position Adjustable Clickers | FOX® 3.0 PODIUM LSC Internal Bypass | |
| TIRES AND WHEELS | Front Tires | 25 x 8-12; Ancla® | 25 x 8-12; Maxxis® | 26 x 8-12; PXT | 26 x 8-12; PXT | 27 x 9-12; GBC® Dirt Commander | 27 x 9-12; GBC® Dirt Commander | 27 x 9-12; GBC® Dirt Commander | 29 x 9-14; Maxxis® Bighorn | 29 x 9-14 Maxxis® Bighorn | 29 x 9-14 Maxxis® Bighorn | 27 x 9-12; GBC® Dirt Commander | 29 x 9-14; Maxxis® Bighorn | 29 x 9-14 Maxxis® Bighorn | 29 x 9-14 Maxxis® Bighorn |
| Rear Tires | 25 x 10-12; Ancla® | 25 x 10-12; Maxxis® | 26 x 9-12; PXT | 26 x 9-12; PXT | 27 x 11-12; GBC® Dirt Commander | 27 x 11-12; GBC® Dirt Commander | 27 x 11-12; GBC® Dirt Commander | 29 x 11-14; Maxxis® Bighorn | 29 x 11-14 Maxxis® Bighorn | 29 x 11-14 Maxxis® Bighorn | 27 x 11-12; GBC® Dirt Commander | 29 x 11-14; Maxxis® Bighorn | 29 x 11-14 Maxxis® Bighorn | 29 x 11-14 Maxxis® Bighorn | |
| Wheels | Stamped Steel | Cast Aluminum | Stamped Steel | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | |
| DIMENSIONS / CAPACITIES | Wheelbase | 77" (196 cm) | 77" (196 cm) | 79" (200.7 cm) | 79" (200.7 cm) | 79" (200.7 cm) | 79" (200.7 cm) | 79" (200.7 cm) | 90" (228.6 cm) | 90" (228.6 cm) | 90" (228.6 cm) | 106.5" (270.5 cm) | 117" (297.2 cm) | 117" (297.2 cm) | 117" (297.2 cm) |
| Dry Weight | 996 lb (452 kg) | 1,077 lb (489 kg) | 1,150 lb (522 kg) | 1,176 lb (533 kg) | 1,204 lb (546 kg) | 1,230 lb (558 kg) | 1,235 lb (560 kg) | 1,369 lb (621 kg) | 1,475 lb (669 kg) | 1,479 lb (671 kg) | 1,476 lb (670 kg) | 1,565 lb (710 kg) | 1,668 lb (757 kg) | 1,672 lb (758 kg) | |
| Overall Vehicle Size (L x W x H) | 107.5 x 50 x 69" (273 x 127 x 175.2 cm) | 107.5 x 50 x 69" (273 x 127 x 175.2 cm) | 105 x 50 x 69.5" (266.7 x 127 x 176.5 cm) | 105 x 50 x 69.5" (266.7 x 127 x 176.5 cm) | 106 x 60 x 71.5" (269.2 x 152.4 x 181.6 cm) | 106 x 60 x 71.5" (269.2 x 152.4 x 181.6 cm) | 106 x 60 x 71.5" (269.2 x 152.4 x 181.6 cm) | 119 x 64 x 73.75" (302.2 x 162.6 x 187.3 cm) | 119 x 64 x 73.75" (302.2 x 162.6 x 187.3 cm) | 119 x 64 x 73.75" (302.2 x 162.6 x 187.3 cm) | 138.1 x 60 x 71.7" (350.8 x 152.4 x 182.1 cm) | 146 x 64 x 73.75" (370.8 x 162.6 x 187.3 cm) | 146 x 64 x 73.75" (370.8 x 162.6 x 187.3 cm) | 146 x 64 x 73.75" (370.8 x 162.6 x 187.3 cm) | |
| Ground Clearance | 10.5" (26.7 cm) | 10.5" (26.7 cm) | 11" (27.9 cm) | 11" (27.9 cm) | 12.5" (31.8 cm) | 12.5" (31.8 cm) | 12.5" (31.8 cm) | 13.5" (34.3 cm) | 13.5" (34.3 cm) | 13.5" (34.3 cm) | 12.5" (31.8 cm) | 13.5" (34.3 cm) | 13.5" (34.3 cm) | 13.5" (34.3 cm) | |
| Fuel Capacity | 7.25 gal (27.4 L) | 7.25 gal (27.4 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | 9.5 gal (36.0 L) | |
| Bed Box Dimensions (L x W x H) | 20 x 40 x 9" (51 x 102 x 23 cm) | 20 x 40 x 9" (51 x 102 x 23 cm) | 20.7 x 37 x 7.9" (52.5 x 94 x 20 cm) | 20.7 x 37 x 7.9" (52.5 x 94 x 20 cm) | 20.7 x 37 x 7.9" (52.5 x 94 x 20 cm) | 20.7 x 37 x 7.9" (52.5 x 94 x 20 cm) | 20.7 x 37 x 7.9" (52.5 x 94 x 20cm) | 28 x 22 x 7" (72 x 57 x 17.8 cm) | 28 x 22 x 7" (72 x 57 x 17.8 cm) | 28 x 22 x 7" (72 x 57 x 17.8 cm) | 20.7 x 37 x 7.9" (52.5 x 94 x 20cm) | 28 x 22 x 7" (72 x 57 x 17.8 cm) | 28 x 22 x 7" (72 x 57 x 17.8 cm) | 28 x 22 x 7" (72 x 57 x 17.8 cm) | |
| Rear Rack Capacity | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | 300 lb (136.1 kg) | |
| Payload Capacity | 740 lb (335.6 kg) | 740 lb (335.6 kg) | 740 lb (335.6 kg) | 740 lb (335.6 kg) | 740 lb (335.6 kg) | 740 lb (335.6 kg) | 740 lb (335.6 kg) | 740 lb (335.6 kg) | 740 lb (335.6 kg) | 740 lb (335.6 kg) | 900 lb (408.2 kg) | 900 lb (408.2 kg) | 900 lb (408.2 kg) | 900 lb (408.2 kg) | |
| Lighting | Halogen, 50W | Halogen, 55W low / 60W high | Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights | Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights | Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights | Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights | Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights | White LED, Low/High & Red LED Tail / Brake Lights | White LED, Low / High & Red LED Tail / Brake Lights | White LED, Low / High & Red LED Tail / Brake Lights | Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights | White LED, Low / High & Red LED Tail / Brake Lights | White LED, Low / High & Red LED Tail / Brake Lights | White LED, Low/High & Red LED Tail / Brake Lights | |

SPECIAL EDITIONS

ALL-NEW



RZR DYNAMIX™ EDITION
SAME FEATURES AS RZR XP™ TURBO PLUS:

- » Dynamix™ Active Suspension
- » Dynamix™ Visualizer
- » Ride Command™ 7" Glove-Touch Display
- » Rear-Facing Camera
- » 900 Watt Stator



RIDE COMMAND™ EDITION
SAME FEATURES AS RZR XP™ 1000 PLUS:

- » 7" Glove-Touch Display
- » AM/FM Antenna
- » In-door Audio
- » Front and Rear Wired Cameras

[DOWNLOAD THE FREE RIDE COMMAND™ APP](#)



RIDE COMMAND™ 4-SEAT EDITION
SAME FEATURES AS RZR XP™ 4 1000 PLUS:

- » 7" Glove-Touch Display
- » AM/FM Antenna
- » In-door Audio
- » Front and Rear Wired Cameras

[DOWNLOAD THE FREE RIDE COMMAND™ APP](#)



HIGH LIFTER EDITION
SAME FEATURES AS RZR XP™ 1000 PLUS:

- » Front Bull Bumper with Winch Hook
- » Polaris® 4,500 lb (2,041 kg) Integrated Winch
- » High-Clearance Lower Control Arms
- » High-Clearance Lower Radius Rods
- » Outlaw 2 Tires
- » High-Mount Rear Intake System
- » Rearview Mirror and Half Doors



TRAILS & ROCKS EDITION
SAME FEATURES AS RZR XP™ 1000 PLUS:

- » Front Bull Bumper with Tow Loop
- » Polaris® 4,500 lb (2,041 kg) Integrated Winch
- » High-Clearance Lower Control Arms
- » High-Clearance Lower Radius Rods
- » ProArmor™ Crawler XG Tires with Beadlock Wheel
- » Rock Sliders & HMM Skid Plate
- » Rearview Mirror
- » High-Visibility Front Fender
- » Flares and Click-6 Harnesses

SPORTSMAN® 2018 SPECIFICATIONS

| | REC / UTILITY | | | | | | SPORT / UTILITY | | | | 2-UP / UTILITY | | | | | MUD & SPORT | |
|--|---|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ENGINE / DRIVE TRAIN | ProStar® 500cc, 4-Stroke SOHC Single-Cylinder | ProStar® 500cc, 4-Stroke SOHC Single-Cylinder | ProStar® 567cc, 4-Stroke DOHC Single-Cylinder | ProStar® 567cc, 4-Stroke DOHC Single-Cylinder | ProStar® 567cc, 4-Stroke DOHC Single-Cylinder | ProStar® 567cc, 4-Stroke DOHC Single-Cylinder | ProStar® 850cc, 4-Stroke SOHC Twin-Cylinder | ProStar® 850cc, 4-Stroke SOHC Twin-Cylinder | ProStar® 952cc, 4-Stroke SOHC Twin-Cylinder | ProStar® 952cc, 4-Stroke SOHC Twin-Cylinder | ProStar® 567cc, 4-Stroke DOHC Single-Cylinder | ProStar® 567cc, 4-Stroke DOHC Single-Cylinder | ProStar® 567cc, 4-Stroke DOHC Single-Cylinder | ProStar® 850cc, 4-Stroke SOHC Twin-Cylinder | ProStar® 952cc, 4-Stroke SOHC Twin-Cylinder | ProStar® 952cc, 4-Stroke SOHC Twin-Cylinder | ProStar® 850cc, 4-Stroke SOHC Twin-Cylinder |
| Horsepower | 33 HP | 33 HP | 44 HP | 44 HP | 44 HP | 44 HP | 78 HP | 78 HP | 90 HP | 90 HP | 44 HP | 44 HP | 44 HP | 78 HP | 88 HP | 85 HP | 78 HP |
| Drive System | True On-Demand AWD / 2WD | True On-Demand AWD / 2WD | True On-Demand AWD / 2WD | True On-Demand AWD / 2WD | High Performance True On-Demand AWD / 2WD | High Performance True On-Demand AWD / 2WD | True On-Demand AWD / 2WD | High Performance True On-Demand AWD / 2WD | High Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | High-Performance True On-Demand AWD / 2WD | True On-Demand AWD / 2WD |
| Engine Braking System / Active Descent Control | Not Equipped / Not Equipped | Not Equipped / Not Equipped | Not Equipped / Not Equipped | Standard / Not Equipped | Standard / Standard | Standard / Standard | Standard / Not Equipped | Standard / Standard | Standard / Standard | Standard / Standard | Standard / Standard | Not Equipped / Not Equipped | Standard / Standard | Standard / Standard | Standard / Standard | Not Equipped / Not Equipped | Not Equipped / Not Equipped |
| SUSPENSION | MacPherson Strut, 8.2" (20.8 cm) Travel | MacPherson Strut, 8.2" (20.8 cm) Travel | MacPherson Strut, 8.2" (20.8 cm) Travel | MacPherson Strut, 8.2" (20.8 cm) Travel | Dual A-Arm, 8.2" (20.8 cm) Travel | Dual A-Arm, 8.2" (20.8 cm) Travel | High-Clearance Arched Dual A-Arm, 9" (22.9 cm) Travel | High-Clearance Arched Dual A-Arm, 9" (22.9 cm) Travel | High-Clearance Arched Dual A-Arm, 9" (22.9 cm) Travel | High-Clearance Arched Dual A-Arm, 9" (22.9 cm) Travel | MacPherson Strut, 8.2" (20.8 cm) Travel | MacPherson Strut, 8.2" (20.8 cm) Travel | Dual A-Arm, 8.2" (20.8 cm) Travel | Dual A-Arm, 9" (22.9 cm) Travel | Dual A-Arm, 9" (22.9 cm) Travel | High-Clearance Arched Dual A-Arm, 7.4" (18.8 cm) Travel | High-Clearance Arched Dual A-Arm, 7.4" (18.8 cm) Travel |
| Rear Suspension | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | High-Clearance Arched Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel | High-Clearance Arched Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel | High-Clearance Arched Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel | High-Clearance Arched Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, Rolled IRS, 10.2" (26 cm) Travel | Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel | High-Clearance Arched Dual A-Arm, Rolled IRS, 6.7" (17 cm) Travel | High-Clearance Arched Dual A-Arm, Rolled IRS, 6.7" (17 cm) Travel |
| TIRES & WHEELS | 24X8-12; NS388 | 24X8-12; NS388 | 25 x 8-12; 489 | 25 x 8-12; 489 | 26 x 8-14; CST / PXT 6-Ply Radial | 26 x 8-14; CST / PXT 6-Ply Radial | 26 x 8-14; CST | 26 x 8-14; CST | 26 x 8-14; CST | 26 x 8-14; CST | 25 x 8-12; 489 | 25 x 8-12; 489 | 26 x 8-14; CST | 26 x 8-14; CST | 26 x 9-14; PXT | 29.5 x 9.5-14; Outlaw | 29.5 x 9.5-14; Outlaw |
| Rear Tires | 24X10-12; NS388 | 24X10-12; NS388 | 25 x 10-12; 489 | 25 x 10-12; 489 | 26 x 8-14; CST / PXT 6-Ply Radial | 26 x 10-14; CST / PXT 6-Ply Radial | 26 x 10-14; CST | 26 x 10-14; CST | 26 x 10-14; CST | 26 x 10-14; CST | 25 x 10-12; 489 | 25 x 10-12; 489 | 26 x 10-14; CST | 26 x 10-14; CST | 26 x 11-14; PXT | 29.5 x 9.5-14; Outlaw | 29.5 x 9.5-14; Outlaw |
| Wheels | Stamped Steel | Stamped Steel | Stamped Steel | Stamped Steel | Cast Aluminum | Cast Aluminum | Stamped Steel | Cast Aluminum | Cast Aluminum | Cast Aluminum | Stamped Steel | Stamped Steel | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Stamped Steel |
| DIMENSIONS / CAPACITIES | Wheelbase: 50.5" (128.3 cm) | 50.5" (128.3 cm) | 50.5" (128.3 cm) | 50.5" (128.3 cm) | 50.5" (128.3 cm) | 50.5" (128.3 cm) | 53" (134.6 cm) | 53" (134.6 cm) | 53" (134.6 cm) | 53" (134.6 cm) | 56" (142.2 cm) | 56" (142.2 cm) | 56" (142.2 cm) | 57" (144.8 cm) | 57" (144.8 cm) | 53" (134.6 cm) | 53" (134.6 cm) |
| Dry Weight | 701 lb (318 kg) | 721 lb (328 kg) | 704 lb (330 kg) | 755 lb (343 kg) | 730 lb (332 kg) | 753 lb (342 kg) | 771 lb (351 kg) | 785 lb (359 kg) | 805 lb (366 kg) | 805 lb (366 kg) | 788 lb (358 kg) | 728 lb (330 kg) | 773 lb (351 kg) | 804 lb (365 kg) | 886 lb (403 kg) | 974 lb (441 kg) | 921 lb (417 kg) |
| Overall Vehicle Size (L x W x H) | 83 x 48 x 47" (210.8 x 121.9 x 119.4 cm) | 84 x 48 x 47" (213 x 121.9 x 119.4 cm) | 83 x 48 x 48" (210.8 x 121.9 x 121.9 cm) | 83 x 48 x 48" (210.8 x 121.9 x 121.9 cm) | 83 x 48 x 48" (210.8 x 121.9 x 121.9 cm) | 83 x 48 x 48" (210.8 x 121.9 x 121.9 cm) | 83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm) | 83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm) | 83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm) | 83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm) | 89 x 48 x 48" (218.4 x 121.9 x 121.9 cm) | 86 x 48 x 48" (218.4 x 121.9 x 121.9 cm) | 86 x 48 x 48" (218.4 x 121.9 x 121.9 cm) | 86.5 x 47.6 x 58.25" (219.7 x 120.9 x 147.9 cm) | 86.5 x 47.6 x 58.25" (219.7 x 120.9 x 147.9 cm) | 88 x 49 x 52" (223 x 124 x 132 cm) | 83 x 49 x 52" (210 x 124 x 132 cm) |
| Ground Clearance | 10.5" (26.6 cm) | 10.5" (26.6 cm) | 11" (27.9 cm) | 11" (27.9 cm) | 11.5" (29.2 cm) | 11.5" (29.2 cm) | 11.5" (29.2 cm) | 11.5" (29.2 cm) | 11.5" (29.2 cm) | 11.5" (29.2 cm) | 11" (27.9 cm) | 11" (27.9 cm) | 11.5" (29.2 cm) | 11.25" (28.5 cm) | 11.25" (28.5 cm) | 13.5" (34.3 cm) | 13.5" (34.3 cm) |
| Seat Height | 33.25" (84.5 cm) | 33.25" (84.5 cm) | 33.75" (85.7 cm) | 33.75" (85.7 cm) | 34.25" (87 cm) | 34.25" (87 cm) | 37" (94 cm) | 37" (94 cm) | 37" (94 cm) | 37" (94 cm) | 33.75" (85.7 cm) | 33.75" (85.7 cm) | 34.25" (87 cm) | 35.75" (90.8 cm) | 35.75" (90.8 cm) | 39" (99 cm) | 39" (99 cm) |
| Fuel Capacity | 4.5 gal (17.0 L) | 4.5 gal (17.0 L) | 4.5 gal (17.0 L) | 4.5 gal (17.0 L) | 4.5 gal (17.0 L) | 4.5 gal (17.0 L) | 5.25 gal (19.9 L) | 5.25 gal (19.9 L) | 5.25 gal (19.9 L) | 5.25 gal (19.9 L) | 6.75 gal (26.3 L) | 6.75 gal (26.3 L) | 6.75 gal (26.3 L) | 5.25 gal (19.9 L) | 5.25 gal (19.9 L) | 5.25 gal (19.9 L) | 5.25 gal (19.9 L) |
| Rear Box Dimensions (L x W x H) | N.A. | N.A. | N.A. | N.A. | N.A. | N.A. | N.A. | N.A. | N.A. | N.A. | 37.5 x 19.5 x 6.5" (95 x 49.5 x 16.5 cm) | N.A. | N.A. | N.A. | N.A. | N.A. | N.A. |
| Front/Rear Rack Capacity | 90 lb (40.8 kg) / 180 lb (81.6 kg) | 90 lb (40.8 kg) / 180 lb (81.6 kg) | 90 lb (40.8 kg) / 180 lb (81.6 kg) | 90 lb (40.8 kg) / 180 lb (81.6 kg) | 90 lb (40.8 kg) / 180 lb (81.6 kg) | 90 lb (40.8 kg) / 180 lb (81.6 kg) | 120 lb (55 kg) / 240 lb (110 kg) | 120 lb (55 kg) / 240 lb (110 kg) | 120 lb (55 kg) / 240 lb (110 kg) | 120 lb (55 kg) / 240 lb (110 kg) | 90 lb (40.8 kg) / 400 lb (180 kg) | 90 lb (40.8 kg) / 180 lb (81.6 kg) | 90 lb (40.8 kg) / 180 lb (81.6 kg) | 120 lb (55 kg) / 240 lb (110 kg) | 120 lb (55 kg) / 240 lb (110 kg) | N.A. / 75 lb (34 kg) | N.A. / 75 lb (34 kg) |
| Payload Capacity | 485 lb (220 kg) | 485 lb (220 kg) | 485 lb (220 kg) | 485 lb (220 kg) | 485 lb (220 kg) | 485 lb (220 kg) | 575 lb (261 kg) | 575 lb (261 kg) | 575 lb (261 kg) | 575 lb (261 kg) | 705 lb (320 kg) | 575 lb (261 kg) | 485 lb (220 kg) | 575 lb (261 kg) | 575 lb (261 kg) | 290 lb (132 kg) | 290 lb (132 kg) |
| Hitch Towing Rating | 1,225 lb (555.7 kg) | 1,225 lb (555.7 kg) | 1,225 lb (555.7 kg) | 1,225 lb (555.7 kg) | 1,500 lb (680 kg) | 1,500 lb (680 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 1,225 lb (555.7 kg) | 1,225 lb (555.7 kg) | 1,500 lb (680 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) | 1,500 lb (680.4 kg) |
| Colors | Sage Green, Velocity Blue Velocity Blue | Ghost Grey | Sage Green, Indy Red Polaris Pursuit® Camo | Ghost Grey | Sunset Red, Radar Blue | Polaris Pursuit® Camo | Sage Green, Indy Red | Matte Sunset Red, Titanium Matte Metallic, Polaris Pursuit® Camo | Havasu Red Pearl | Polaris Pursuit® Camo | Sage Green | Indy Red, Velocity Blue | Turbo Silver | Radar Blue | Turbo Silver | Stealth Black | Cruiser Black |

POLARIS GENERAL® 2018 SPECIFICATIONS

2-SEAT

4-SEAT

SPECIAL EDITIONS

| |  |  |  |  |  |  |  |
|---|---|---|--|---|---|--|---|
| | <i>POLARIS GENERAL® 1000 EPS</i> | <i>POLARIS GENERAL® 1000 EPS PREMIUM</i> | <i>POLARIS GENERAL® 1000 EPS DELUXE</i> | <i>POLARIS GENERAL® 4 1000 EPS</i> | <i>POLARIS GENERAL® 1000 EPS RIDE COMMAND®</i> | <i>POLARIS GENERAL® 1000 EPS HUNTER EDITION</i> | <i>POLARIS GENERAL® 1000 EPS LIMITED EDITION</i> |
| ENGINE/DRIVE TRAIN | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder |
| Engine Type | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder | ProStar® 1000; 4-Stroke DOHC Twin-Cylinder |
| Horsepower | 100 HP | 100 HP | 100 HP | 100 HP | 100 HP | 100 HP | 100 HP |
| Drive System | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode | On-Demand True AWD / 2WD / VersaTrac Turf Mode |
| Engine Braking System | Standard | Standard | Standard | Standard | Standard | Standard | Standard |
| SUSPENSION | Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel | Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel | Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel | Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel | Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel | Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel | Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel |
| Front Shocks | ZF Sachs® Twin Tube | ZF Sachs® Twin Tube | FOX® 2.0 PODIUM X QS3 | FOX® 2.0 PODIUM X QS3 | FOX® 2.0 PODIUM X QS3 | ZF Sachs® Twin Tube | ZF Sachs® Twin Tube |
| Rear Suspension | Dual Arm IRS with Stabilizer Bar and 13.2" (33.5 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel | Dual A-Arm, IRS 9.5" (24.1 cm) Travel |
| Rear Shocks | ZF Sachs® Twin Tube | ZF Sachs® Twin Tube | FOX® 2.0 PODIUM X QS3 | FOX® 2.0 PODIUM X QS3 | FOX® 2.0 PODIUM X QS3 | ZF Sachs® Twin Tube | ZF Sachs® Twin Tube |
| TIRES & WHEELS | 27x9.00R12 NHS; CST Clincher | 27 x 9-14; Maxxis® Coronado | 27 x 9-14; Maxxis® Coronado | 27 x 9-14; Dirt Commander | 27 x 9-14; Maxxis® Coronado | 27 x 9-14; Maxxis® Coronado | 27 x 9-14; Maxxis® Coronado |
| Front Tires | 27x9.00R12 NHS; CST Clincher | 27 x 9-14; Maxxis® Coronado | 27 x 9-14; Maxxis® Coronado | 27 x 9-14; Dirt Commander | 27 x 9-14; Maxxis® Coronado | 27 x 9-14; Maxxis® Coronado | 27 x 9-14; Maxxis® Coronado |
| Rear Tires | 27x11.00R12 NHS; CST Clincher | 27 x 11-14; Maxxis® Coronado | 27 x 11-14; Maxxis® Coronado | 27 x 11-14; Dirt Commander | 27 x 11-14; Maxxis® Coronado | 27 x 11-14; Maxxis® Coronado | 27 x 11-14; Maxxis® Coronado |
| Wheels | Stamped Steel | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum | Cast Aluminum |
| DIMENSIONS / CAPACITIES | 81" (206 cm) | 81" (206 cm) | 81" (206 cm) | 113" (287 cm) | 81" (206 cm) | 81" (206 cm) | 81" (206 cm) |
| Wheelbase | 81" (206 cm) | 81" (206 cm) | 81" (206 cm) | 113" (287 cm) | 81" (206 cm) | 81" (206 cm) | 81" (206 cm) |
| Dry Weight | 1,430 lb (648 kg) | 1,491 lb (676 kg) | 1,544 lb (700 kg) | 1,857 lb (842 kg) | 1,544 lb (700 kg) | 1,491 lb (676 kg) | 1,491 lb (676 kg) |
| Overall Vehicle Size (L x W x H) | 116.4 x 62.5 x 73.8" (295.6 x 158.7 x 187 cm) | 116.4 x 62.5 x 73.8" (295.6 x 158.7 x 187 cm) | 118.2 x 62.5 x 75" (300 x 158.7 x 190.5 cm) | 150.2 x 62.5 x 75" (381.5 x 158.7 x 190.5 cm) | 118.2 x 62.5 x 75" (300 x 158.7 x 190.5 cm) | 118.2 x 62.5 x 73.8" (300 x 158.7 x 187 cm) | 118.2 x 62.5 x 73.8" (300 x 158.7 x 187 cm) |
| Ground Clearance | 12" (30.5 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 12" (30.5 cm) |
| Fuel Capacity | 9.5 gal (35.9 L) | 9.5 gal (35.9 L) | 9.5 gal (35.9 L) | 9.5 gal (35.9 L) | 9.5 gal (35.9 L) | 9.5 gal (35.9 L) | 9.5 gal (35.9 L) |
| Bed Box Dimensions (L x W x H) | 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) | 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) | 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) | 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) | 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) | 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) | 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) |
| Rear Rack Capacity | 600 lb (272 kg) | 600 lb (272 kg) | 600 lb (272 kg) | 600 lb (272 kg) | 600 lb (272 kg) | 600 lb (272 kg) | 600 lb (272 kg) |
| Payload Capacity | 1,100 lb (499 kg) | 1,100 lb (499 kg) | 1,100 lb (499 kg) | 1,280 lb (580 kg) | 1,100 lb (499 kg) | 1,100 lb (499 kg) | 1,100 lb (499 kg) |
| Electronic Power Steering | Standard | Standard | Standard | Standard | Standard | Standard | Standard |
| Other Features | | Polaris® HD 4,500 lb Winch Sport Low Profile Front Bumper | Polaris® HD 4,500 lb Winch, Sport Low Profile Front Bumper, Polaris® Lock & Ride® Sport Roof, Premium 8-Speaker Bluetooth® AM/FM Soundbar, Convex Rear View Mirror | Polaris® HD 4,500 lb Winch Sport Low Profile Front Bumper | Polaris® HD 4,500 lb Winch, Sport Low Profile Front Bumper, Polaris® Lock & Ride® Sport Roof, Premium 8-Speaker Bluetooth® AM/FM Soundbar, Convex Rear View Mirror, Front & Rear On-board Cameras | Polaris® HD 4,500 lb Winch, Sport Low Profile Front Bumper, Lock & Ride® Dual Gun Scabbard, Polaris® Gun Boots (Qty 2) | Polaris® HD 4,500 lb Winch Sport Low Profile Front Bumper Lock & Ride® Tip Down Headache Rack |
| Colors | Indy Red | Radar Blue | Gloss Titanium | Black Pearl | Matte Sunset Red | Polaris Pursuit® Camo | Matte Sagebrush Green |

YOUTH 2018 SPECIFICATIONS

| |  |  |  |  |  |  |
|---|---|---|---|---|---|---|
| | <i>OUTLAW® 50</i> | <i>OUTLAW® 110 EFI</i> | <i>SPORTSMAN® 110 EFI</i> | <i>POLARIS ACE® 150 EFI</i> | <i>RZR® 170 EFI</i> | <i>PHOENIX™ 200</i> |
| ENGINE | 6+ | 10+ | 10+ | 10+ | 10+ | 14+ |
| Engine Type | 49cc, 4-Stroke Single-Cylinder | 112cc, 4-Stroke Single-Cylinder | 112cc, 4-Stroke Single-Cylinder | 149cc, 4-Stroke Single-Cylinder | 169cc, 4-Stroke Single-Cylinder | 196cc, 4-Stroke Single-Cylinder |
| Fuel System | Carbureted | EFI | EFI | EFI | EFI | Carbureted |
| Cooling | Air | Air | Air | Air/Oil | Fan | Air |
| DRIVE TRAIN / SUSPENSION | Automatic PVT Forward; O-ring Chain | Automatic PVT F/N/R; O-ring Chain | Automatic PVT F/N/R; O-ring Chain | Automatic PVT F/N/R; O-ring Chain | Automatic PVT F/N/R; O-ring Chain | Automatic PVT F/N/R; Shaft |
| Drive System | 2WD | 2WD | 2WD | 2WD | 2WD | 2WD |
| Front Suspension | Single A-Arm with 3" (7.6 cm) Travel | Single A-Arm with 5" (12.7 cm) Travel | Single A-Arm with 5" (12.7 cm) Travel | Dual A-Arm 5.1" (13 cm) Travel | Single A-Arm with 5" (12.7 cm) Travel | Dual A-Arm with 7" (17.8 cm) Travel |
| Rear Suspension | Mono-Shock Swingarm with 3" (7.6 cm) Travel | Mono-Shock Swingarm with 6" (15.2 cm) Travel | Mono-Shock Swingarm with 6" (15.2 cm) Travel | Swingarm Dual Shocks with 6" (15.2 cm) Travel | Swingarm Dual Shocks with 5" (12.7 cm) Travel | Mono-Shock Swingarm with 6.5" (16.5 cm) Travel |
| TIRES & WHEELS | 16 x 6.5-7 | 19 x 7-8 | 19 x 7-8 | 22 x 7-10 | 19 x 7-8 | 21 x 7-10 |
| Front Tires | 16 x 6.5-7 | 19 x 7-8 | 19 x 7-8 | 22 x 7-10 | 19 x 7-8 | 21 x 7-10 |
| Rear Tires | 16 x 8-7 | 18 x 9.5-8 | 18 x 9.5-8 | 22 x 10-10 | 20 x 10-9 | 20 x 10-9 |
| Wheels | Stamped Steel | Stamped Steel | Stamped Steel | Stamped Steel | Stamped Steel | Stamped Steel |
| DIMENSIONS / CAPACITIES | 33" (83.8 cm) | 41.5" (105.4 cm) | 41.5" (105.4 cm) | 65" (165.1 cm) | 65" (165.1 cm) | 45" (114.3 cm) |
| Wheelbase | 33" (83.8 cm) | 41.5" (105.4 cm) | 41.5" (105.4 cm) | 65" (165.1 cm) | 65" (165.1 cm) | 45" (114.3 cm) |
| Dry Weight | 215 lb (98 kg) | 278 lb (126 kg) | 289 lb (131 kg) | 572 lb (260 kg) | 532 lb (241 kg) | 420 lb (191 kg) |
| Overall Vehicle Size (L x W x H) | 48 x 31.5 x 28" (121.9 x 80 x 71.1 cm) | 61.25 x 36.75 x 38.5" (155.6 x 93.3 x 97.8 cm) | 61.75 x 36.75 x 38.5" (156.8 x 93.3 x 97.8 cm) | 85 x 48 x 58" (215.9 x 121.9 x 147.3 cm) | 85 x 48 x 55" (215.9 x 121.9 x 139.7 cm) | 65 x 42 x 42" (165.1 x 106.7 x 106.7 cm) |
| Ground Clearance | 4" (10.2 cm) | 4" (10.2 cm) | 4" (10.2 cm) | 9" (22.9 cm) | 6" (15.2 cm) | 5.7" (14.5 cm) |
| Seat Height | 23" (58.4 cm) | 27" (68.6 cm) | 27" (68.6 cm) | N.A. | N.A. | 32" (81.3 cm) |
| Fuel Capacity | 1.2 gal (4.5 L) | 1.6 gal (5.9 L) | 2.0 gal (7.8 L) | 2.5 gal (9.5 L) | 2.5 gal (9.5 L) | 2.5 gal (9.5 L) |
| Rear Box Dimensions (L x W x H) | N.A. | N.A. | N.A. | 17 x 32 x 3" (43.2 x 81.3 x 7.6 cm) | N.A. | N.A. |
| Front/Rear Rack or Box Capacity | N.A. | N.A. | 15 lb / 30 lb (6.8 kg / 13.6 kg) | 50 lb (22.7 kg) | N.A. | N.A. |
| Payload Capacity | N.A. | N.A. | 45 lb (20.4 kg) | 50 lb (22.7 kg) | N.A. | N.A. |
| Colors | Pink Power, Lime Squeeze | Pink Power, Lime Squeeze | Velocity Blue | Indy Red | Cruiser Black / Lime Squeeze or Bright White / Indy Red | Avalanche Grey |

*Check your local laws regarding riding regulations for minors.

2018



RANGER RZR POLARIS GENERAL SPORTSMAN POLARIS ACE



WARNING: The Polaris off-road vehicles can be hazardous to operate and is not intended for on-road use. Driver must be at least 16 years old with a valid driver's license to operate. Passengers must be at least 12 years old. Drivers and passengers should always wear helmets, eye protection, and seat belts. Always use cab nets or doors (as equipped). Never engage in stunt driving, and avoid excessive speeds and sharp turns. Riding and alcohol/drugs don't mix. All drivers should take a safety training course. Call 800-342-3764 for additional information. Check local laws before riding on trails. All claims based on IHS Automotive, Polk total full-size new U.S. Automatic ATV registrations between October 2015 and December 2016. HIGH LIFTER and HIGH LIFTER OUTLAW are trademarks of HIGH LIFTER PRODUCTS, INC. Bluetooth® is a registered trademark of Bluetooth Sig. Inc. All rights reserved. ©2017 Polaris Industries Inc. all pricing, specifications, claims and information contained in this brochure are based on information available at the time of publication and are subject to change without notice.

Youth models have special age restrictions: the Polaris RZR® 170 and ACE® 150 are intended for operators age 10 and older, 50-cc ATV models are intended for operators ages 6 and over, 110-cc ATV models are intended for operators ages 10 and older, and the 200-cc ATV is intended for operators age 14 and older. All Polaris youth vehicles require adult supervision at all times for operators under age 16.

MY18 ORV W6 BROCH-CAN EN • 9930420