

# FRONT CAMERA KIT



P/N 2882381

## APPLICATION

Verify accessory fitment at [Polaris.com](http://Polaris.com).

## BEFORE YOU BEGIN


Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

## KIT CONTENTS

This kit contains parts for installation of the front camera only. Prior installation of the following additional kits (or equivalent) is also required (kits sold separately):

- RIDE COMMAND™ 7" Display Kit, PN 2882068
- RIDE COMMAND™ 7" Display Mount Kit, PN 2882069

This Kit includes:

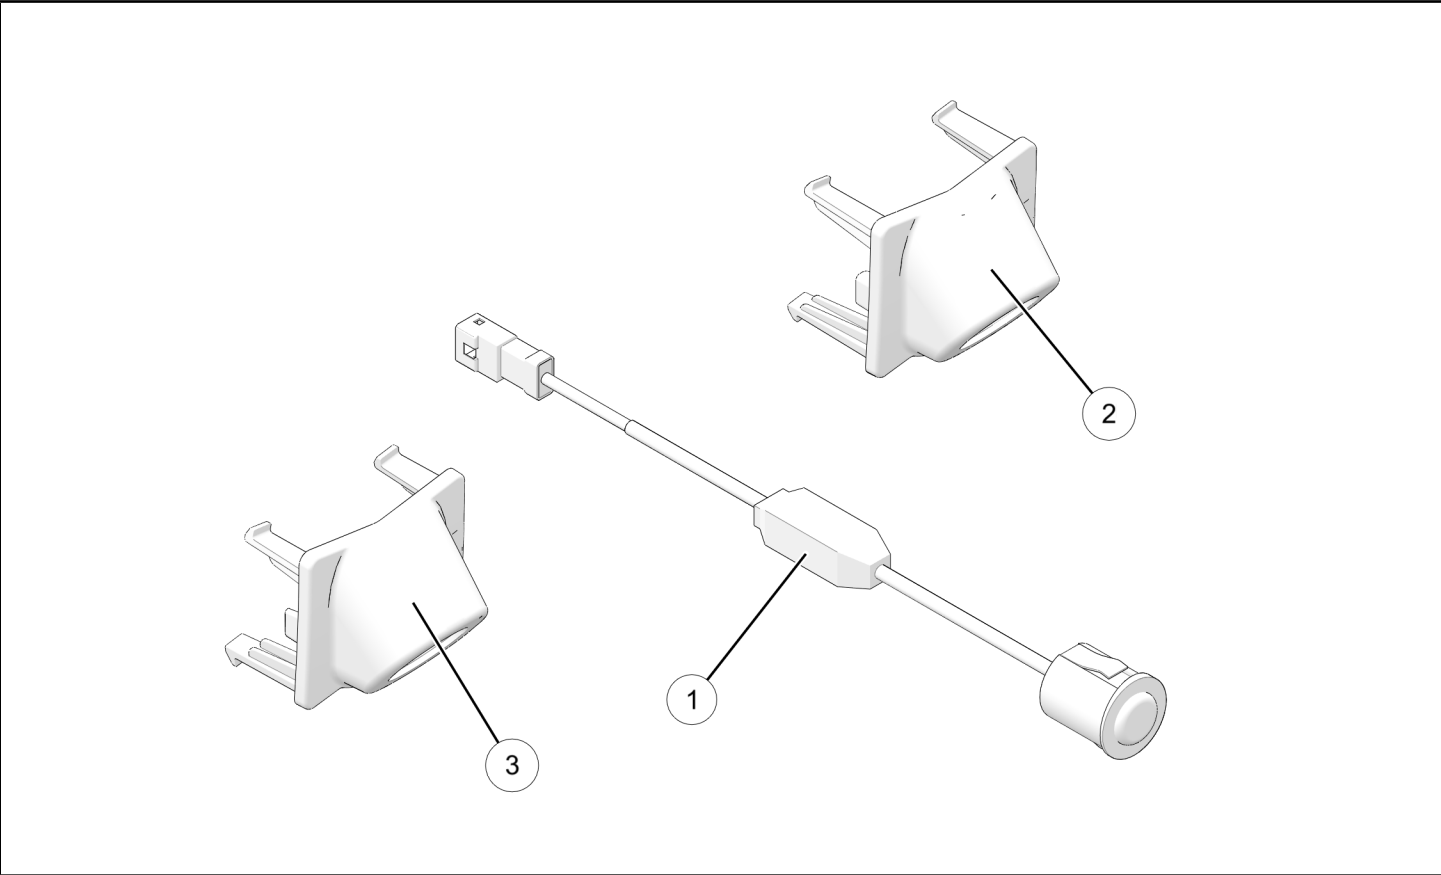

REF	QTY	PART DESCRIPTION	PART NUMBER
1	1	Camera	4016639
2	1	Mount, Camera (RZR® 900/4 900, RZR® S 900, RZR® S 1000, RZR XP® 1000/XP® 4 1000, and MY16 RZR XP® Turbo/XP® 4 Turbo)	5453425

REF	QTY	PART DESCRIPTION	PART NUMBER
3	1	Mount, Camera (MY17 RZR XP® Turbo/XP® 4 Turbo) (has "TURBO" embossed on interior of mount)	5453159
	1	Instructions	9927704

## TOOLS REQUIRED

None

## IMPORTANT


Your Front Camera Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

## ASSEMBLY TIME

Approximately 5 minutes


## INSTALLATION INSTRUCTIONS

- Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.
- Gain Access.
  - Remove hood.
  - Remove front grille by carefully depressing two tabs **A** at top of grille, then tip grille outward.
- Orient spline **B** on camera with slot **C** in camera mount, then insert camera into mount until locking clip engages.

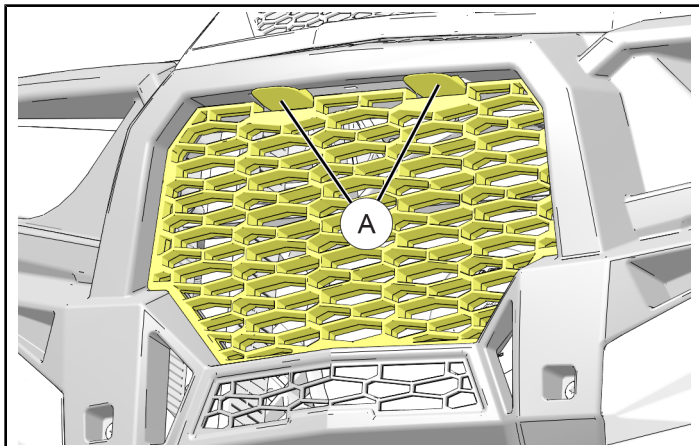


### NOTE

Two different camera mounts are included in kit; see Kit Contents for identification and application.

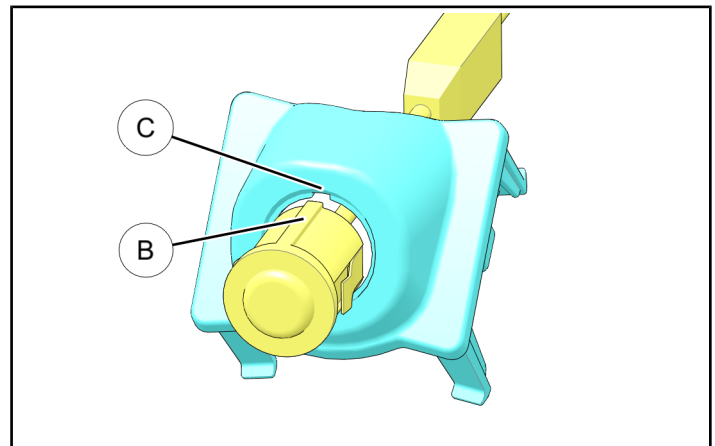

4. Route camera harness through grille, then carefully push camera mount ② into grille until all four tabs lock in place. Ensure the following:
  - Camera mount is positioned as high as possible on grille with camera pointing downward
  - Camera harness is not pinched or kinked as it passes through the grille
5. Holding grille near vehicle, connect camera harness to display harness (sold separately).
6. Restore access.

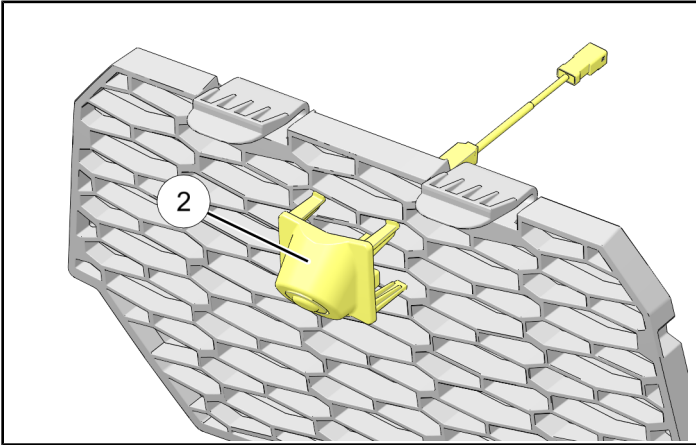

## FEEDBACK FORM

A feedback form has been created for the installer to provide any comments, questions or concerns about the installation instructions. The form is viewable on mobile devices by scanning the QR code or by clicking [HERE](#) if viewing on a PC.

### FEEDBACK FORM

