

# TRUNK RACK BAG KIT



**P/N 2881757**

## APPLICATION


All Indian Motorcycles with Trunk Rack, Luggage Rack, or Solo Rack

## BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

## KIT CONTENTS

This Kit includes:

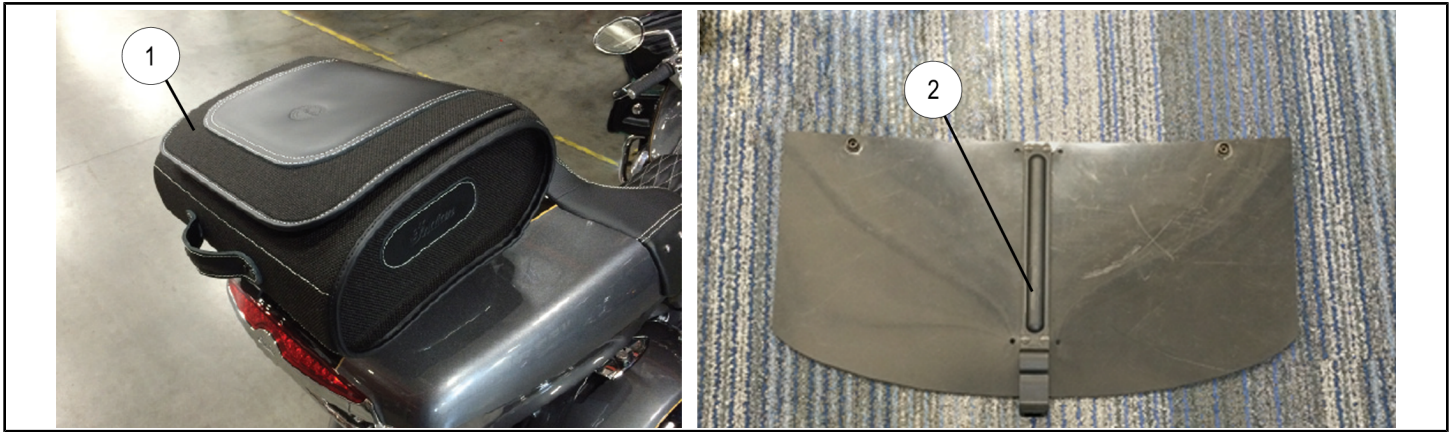

REF	QTY	PART DESCRIPTION	PART NUMBER
1	1	Trunk Rack Bag	2686187
2	1	Luggage/Solo Rack Clip	5814375
	1	Instructions	9926825

## TOOLS REQUIRED

- No Tools Required

## IMPORTANT

Your Indian TRUNK RACK BAG KIT is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

## ASSEMBLY TIME

Approximately 5 minutes

## INSTALLATION INSTRUCTIONS


### NOTE

To make the removal and installation of the bag more convenient, two quick release buckles and straps are attached to the rack. These buckles can be clicked together if you've taken the bag off temporarily, yet still want to ride the bike. Clicking them together and cinching down the straps will keep the buckles from flapping around and possibly damaging surrounding surfaces.


### CAUTION

Even with the buckles secured, the flapping strap ends could scuff or damage painted surfaces. It is best practice to remove the straps along with the bag if they won't be needed for a while.


1. Loop the quick release buckle straps (A) through the slots in the trunk rack (B) or solo rack (C), or around the bars on the luggage rack (D) as shown. Make sure to put the male and female buckles on the correct side (check mating buckle on the bag for confirmation).

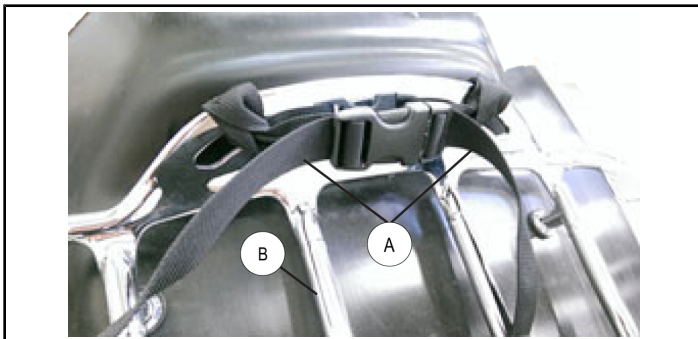

2. Install the correct mounting plate for your application. For the trunk rack, install the mounting plate with the wide clip (E). For the luggage rack or solo rack, install the mounting plate with the narrow clip ②. Slide the correct plate into the sleeve on the bottom of the bag, and secure the two snaps between the bag and the plate (F).

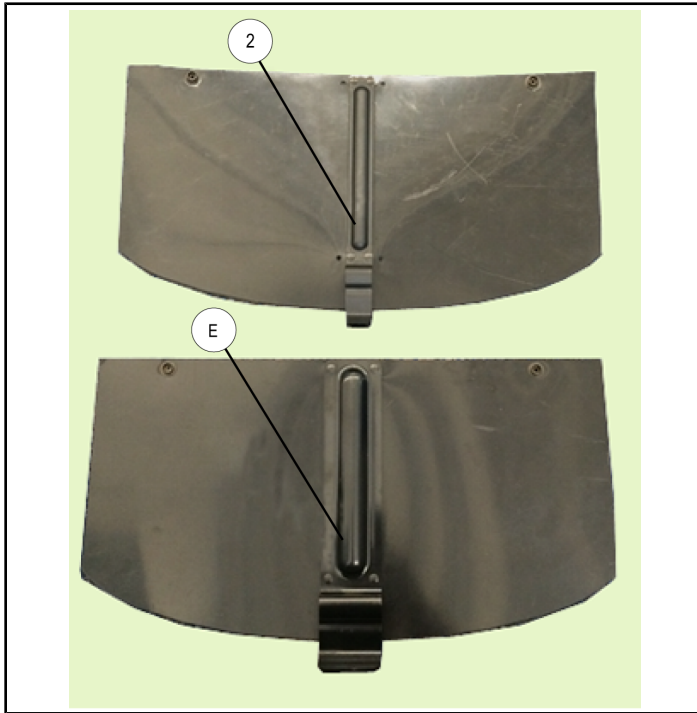

3. While standing behind the vehicle, push the rear latch assembly onto the rear cross bar of the trunk (B), luggage, or solo rack.

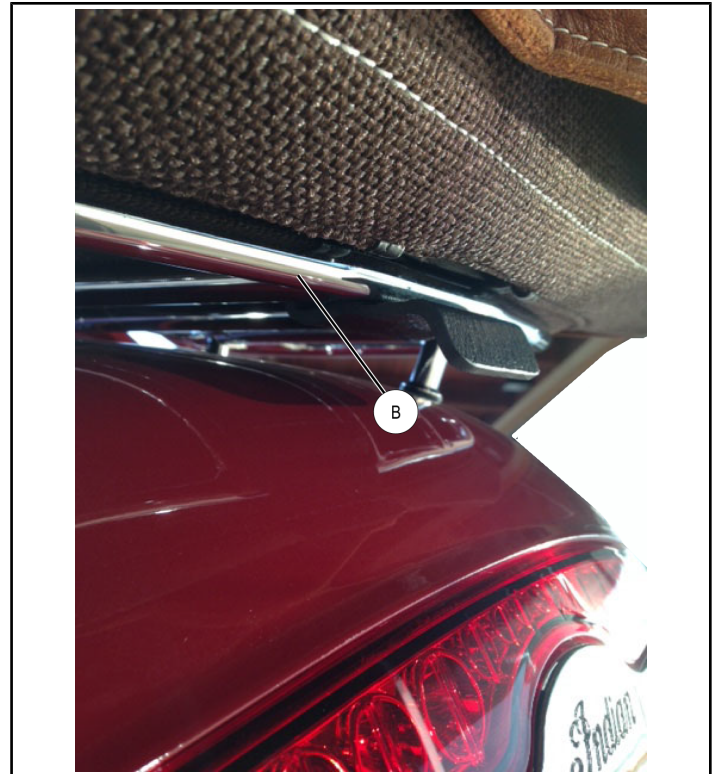

4. Rotate the bag forward and down onto the rack (B).


5. Fasten the left hand (G) and right hand (H) buckles.



6. Cinch down the straps (A) to ensure that the bag ① is tightly held to the rack.



7. Slide elastic bands (J) down over unsecured strap length to stop it from flapping in the wind.

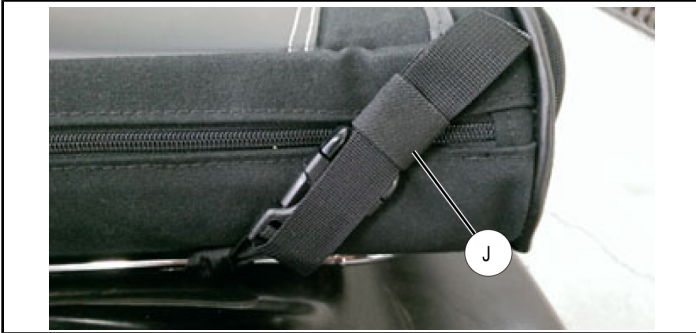


**CAUTION**

To help to avoid scuffing the paint on the trunk lid, always ensure that the two quick release buckles mounted to the rack are either removed with the bag, or are clicked together and pulled tight.



**CAUTION**

Ensure that the rear crossbar latch is fully engaged on the rack by plastic clamp (K) and that the front straps are pulled tight.

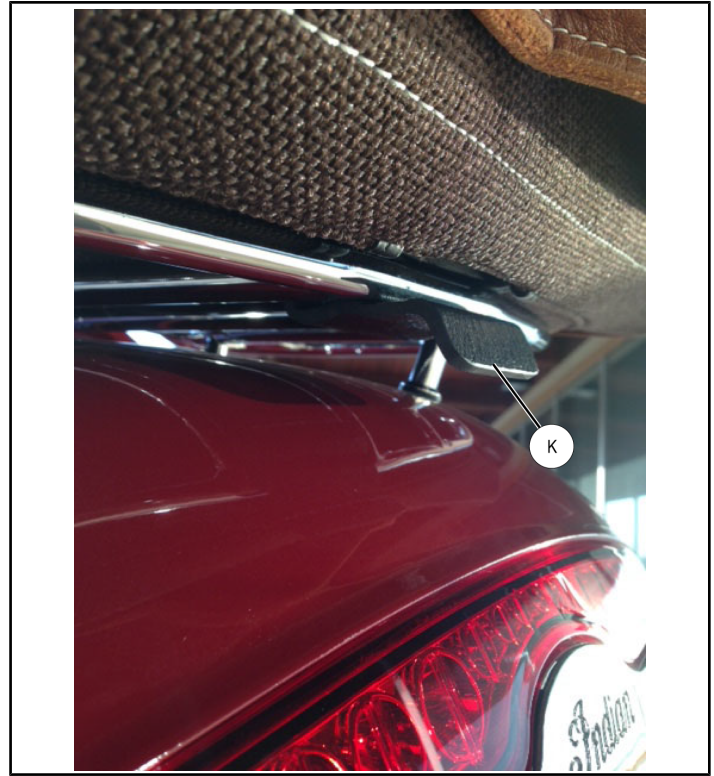

**CAUTION**

Ensure that the weight of the bag and its contents do not exceed the limit of the rack they're being mounted to. See trunk rack information.