V-COVER KIT



P/N 2884465


BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

APPLICATION

Verify accessory fitment at www.indianmotorcycle.com.

KIT CONTENTS

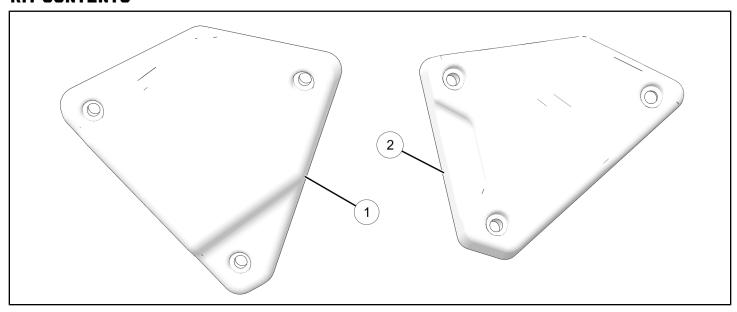

| REF | QTY | PART DESCRIPTION | P/N AVAILABLE SEPARATELY |
|-----|-----|---------------------|-----------------------------|
| 1 | 1 | V-Cover, Right-Hand | 2637800 |
| 2 | 1 | V-Cover, Left-Hand | 2637799 |

TOOLS REQUIRED

- Safety Glasses
- · Hex Key Set, Metric

- Socket Set, Hex Bit, Metric
- · Torque Wrench

IMPORTANT

Your Indian Motorcycle® V-Cover Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

VEHICLE PREPARATION


GENERAL

 Turn key or ignition switch to OFF position and remove key. 2. Ensure motorcycle is parked on a flat surface, kickstand is fully extended, and vehicle is stable prior to installation.

V-COVER REMOVAL


RIGHT V-COVER REMOVAL

1. Remove three V-cover fasteners to remove V-cover from motorcycle.

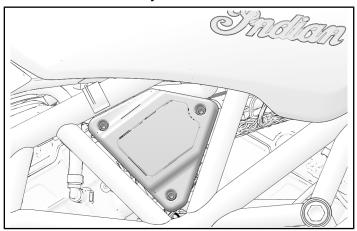


LEFT V-COVER REMOVAL


1. Remove three V-cover fasteners to remove V-cover from motorcycle.

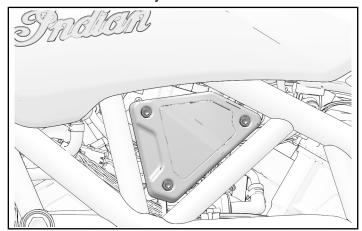

ACCESSORY INSTALLATION


1. Install accessory V-cover ① with three retained V-cover fasteners.



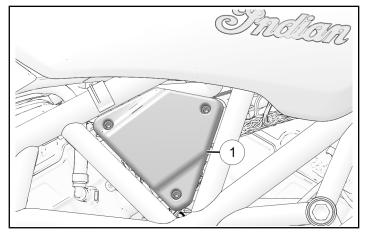

2. Install accessory V-cover ② with three retained V-cover fasteners.

| TORQUE | |
|--------------------|--|
| V-Cover Fasteners: | |
| 36 in-lbs (4 N·m) | |

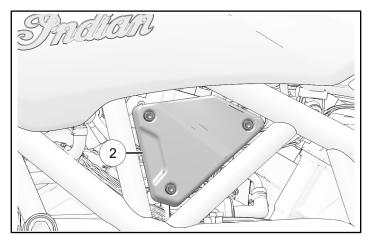

FEEDBACK FORM

A feedback form has been created for the installer to provide any comments, questions or concerns about the installation instructions. The form is viewable on mobile devices by scanning the QR code or by clicking **HERE** if viewing on a PC.

