

# TOUR SEAT WIRING HARNESS KIT



P/N 2880925

## APPLICATION

CHIEFTAIN MOTORCYCLE WITH INDIAN MOTORCYCLE TRUNK AND ORIGINAL SEAT.


## ⚠ WARNING

This accessory is only approved for use with the models listed. **NEVER** use this accessory on non-approved models. Use of this accessory on models other than those listed in these instructions may negatively affect the stability of the vehicle, lead to loss of control, and result in serious injury or death.

**NOTE:** For greater convenience Indian Motorcycle recommends purchase of the tour seat kit PN 2880285 and tour seat harness kit PN 2880926. The tour seat and tour seat harness have been designed specifically for use on a Chieftain Motorcycle with the Indian Motorcycle trunk. Together they provide for quick disconnect capability and convenient storage of the harness without seat removal.

## BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for in package. Please retain these installation instructions for future reference and parts ordering information.

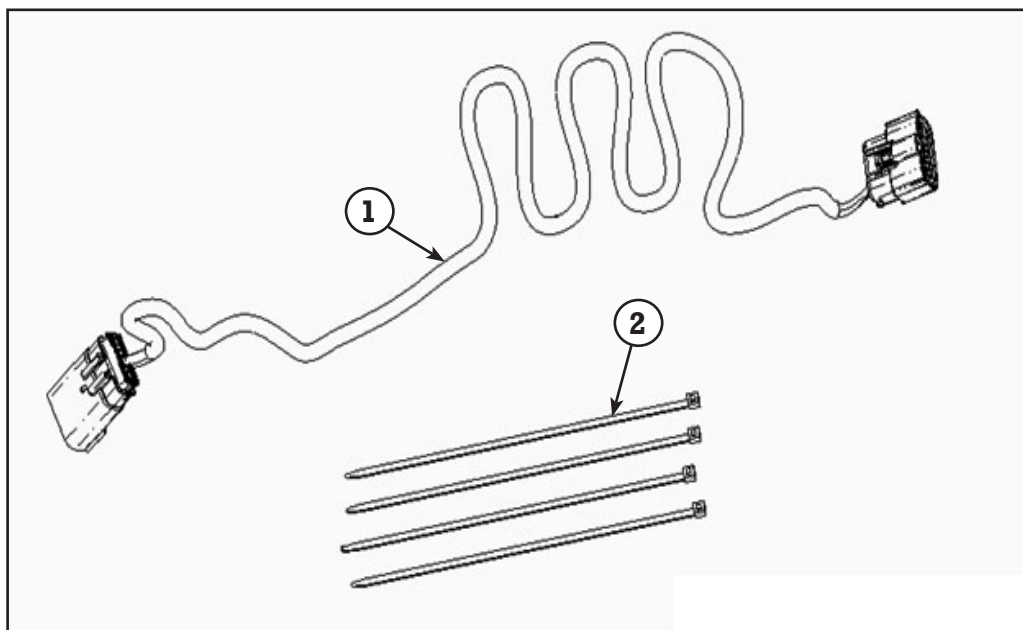

## KIT CONTENTS

| Ref | Qty | Part Description                | Part Number |
|-----|-----|---------------------------------|-------------|
| 1   | 1   | Harness – Trunk, Chieftain Seat | 2413049     |
| 2   | 4   | Panduit Strap                   | 7080138     |
|     | 1   | Instructions                    | 9925908     |

## TOOLS NEEDED

5 mm and 6 mm Hex Key

Torque wrench

Side cutters

## APPROXIMATE ASSEMBLY TIME


10 min

## IMPORTANT

Your Indian TOUR SEAT WIRING HARNESS KIT is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

## INSTALLATION INSTRUCTIONS


1. Remove the seat from the motorcycle following instructions in the owner's manual. Place seat on a clean cloth to protect from damage.
2. Plug harness (1) into motorcycle, position and route wire under left hand side cover as shown in figure.

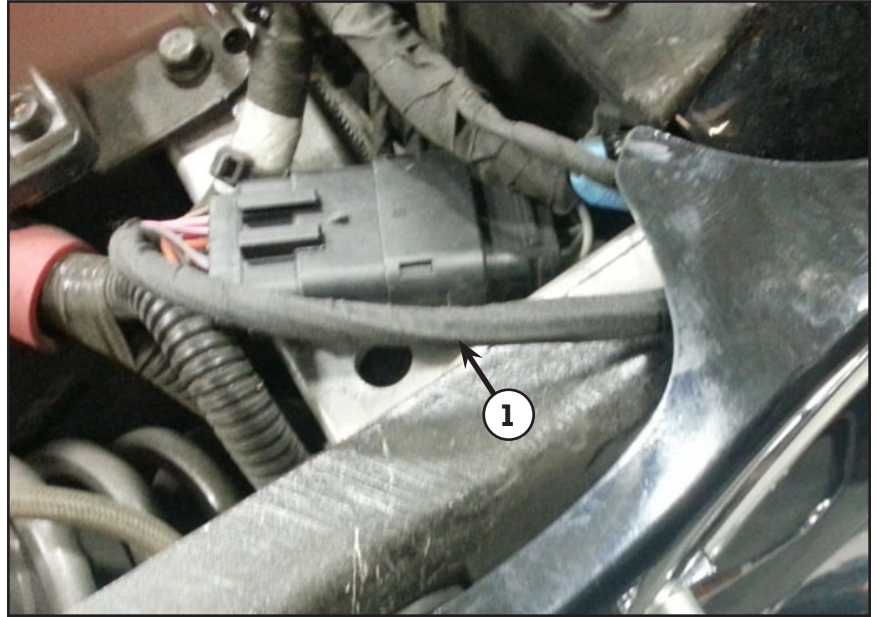


3. Replace seat on motorcycle following instruction in owner's manual.
4. Place harness (1) between fender and frame (A) of trunk as shown in figure.



5. Using panduits (2), attach the harness to trunk frame (A) as shown in figures. Be sure to tie harness in such a manner as to prevent contact with painted surfaces.

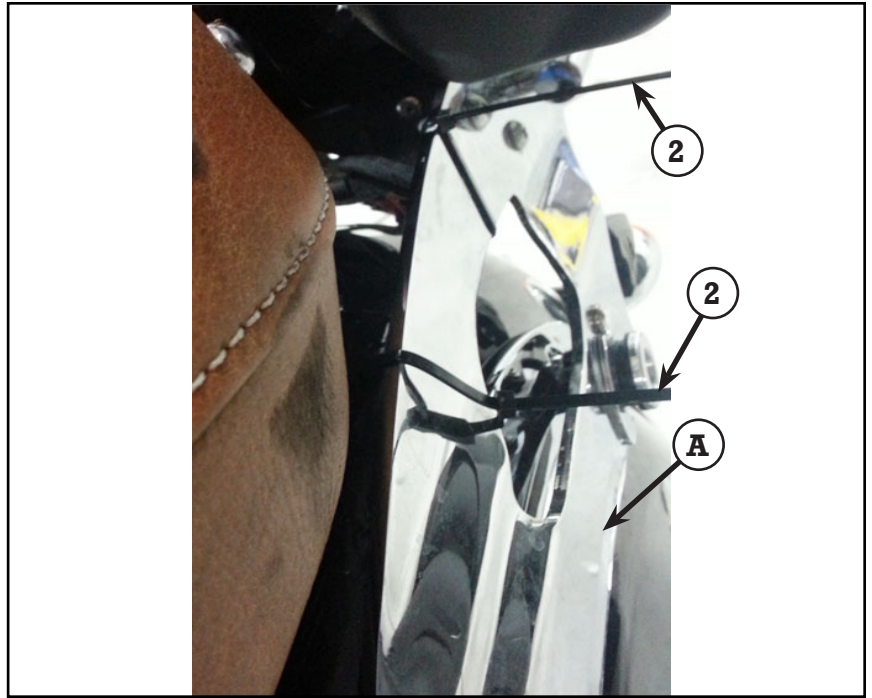

6. Route harness (1) through wire retainer and connect harness to trunk connector (B) and place as shown in figure.

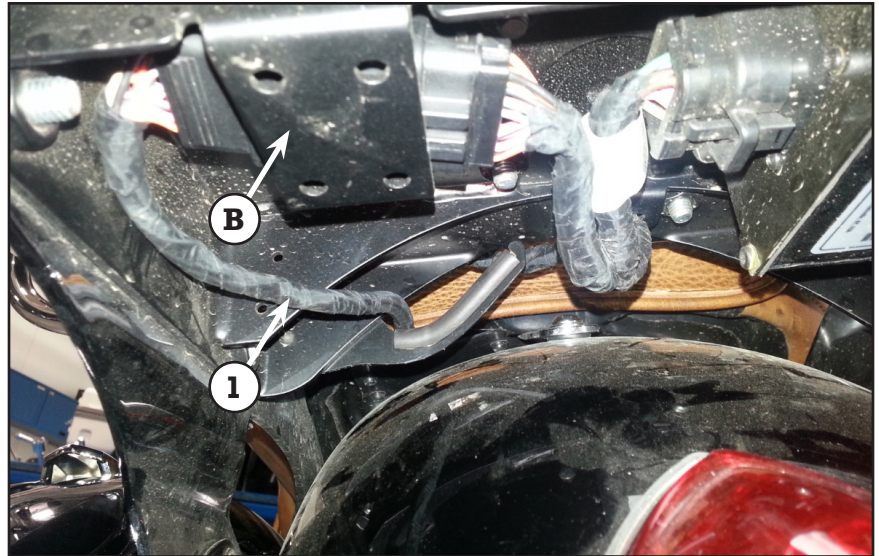

**CAUTION:** Contact between the harness and painted surfaces will cause paint damage. Ensure that the harness is fastened properly and securely and there is no contact possible before riding the motorcycle.