

TOUR SEAT WIRING HARNESS KIT



P/N 2880926

APPLICATION


CHIEFTAIN MOTORCYCLE WITH INDIAN MOTORCYCLE TRUNK AND INDIAN MOTORCYCLE **TOUR SEAT**.

⚠ WARNING

This accessory is only approved for use with the models listed. **NEVER** use this accessory on non-approved models. Use of this accessory on models other than those listed in these instructions may negatively affect the stability of the vehicle, lead to loss of control, and result in serious injury or death.

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for in package. Please retain these installation instructions for future reference and parts ordering information.

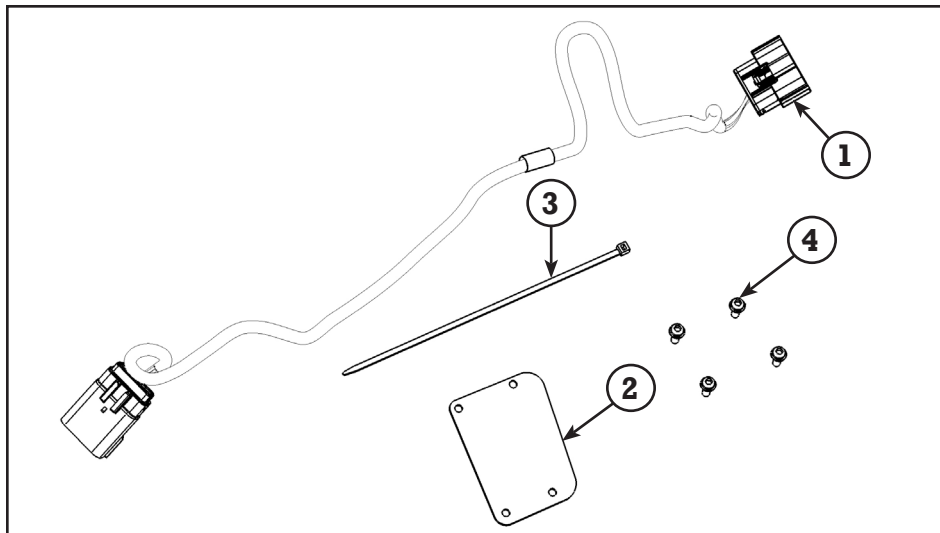

KIT CONTENTS

Ref	Qty	Part Description	Part Number
1	1	Harness - Jumper, Trunk	2412717
2	1	Wire Cover Plate, Seat	5814094
3	1	Panduit Strap	7080138
4	4	Screw – WSHRPNHD, 10 -16	7518641
	1	Instructions	9925909

TOOLS NEEDED

4 mm, 5 mm and 6 mm Hex Key

Torque Wrench

Side cutters

APPROXIMATE ASSEMBLY TIME


10 min

IMPORTANT


Your Indian TOUR SEAT WIRING HARNESS KIT is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

1. Remove the seat from the motorcycle following instructions in the owner's manual. Place seat upside down on a clean cloth.
2. Remove the four screws holding the plastic plate and then remove the plate as shown in figure on page 3.
3. Thread panduit (3) through holes (A) in seat base.

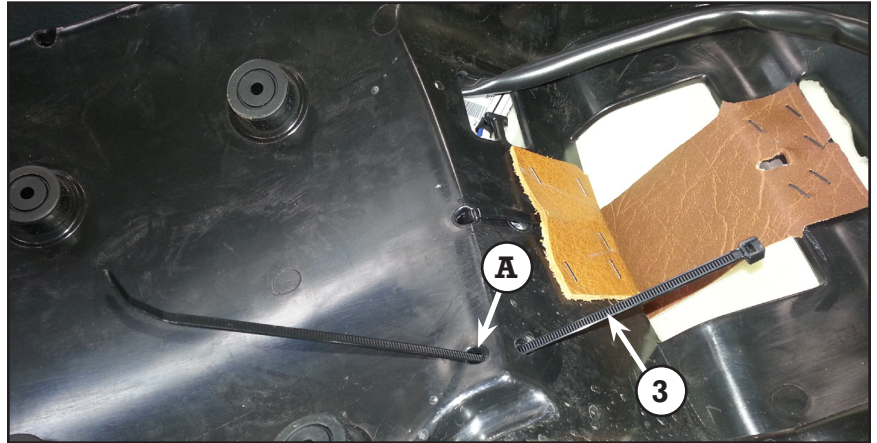


4. Place harness (1) on seat base. Align the white tape (B) with the panduit (3). Short side of harness (1) should go to the center of the seat. Tighten panduit (3) and cut off excess.

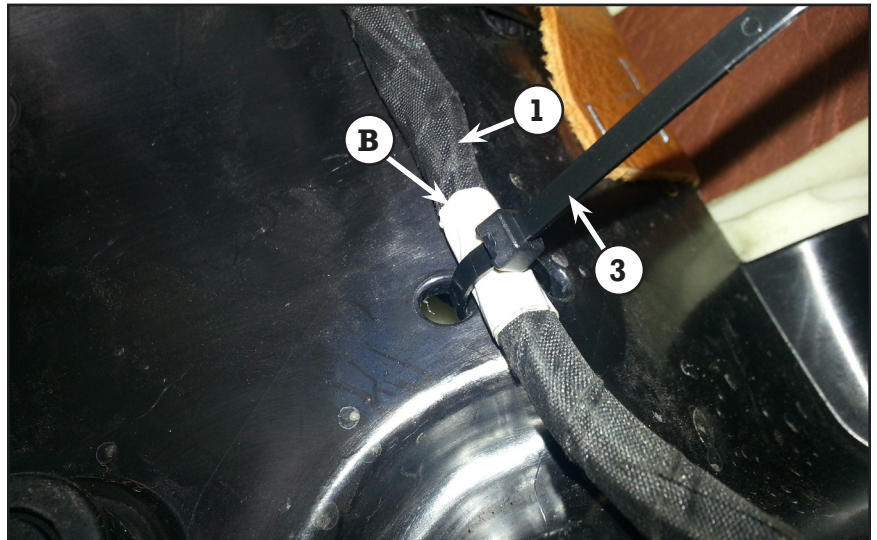

5. Press the harness (1) into clips in seat base.



6. Install wire cover plate (2) using four screws (4). Tighten to 14 in-lbs (1.6 Nm).
7. Replace seat on motorcycle following instruction in Owner's Manual.

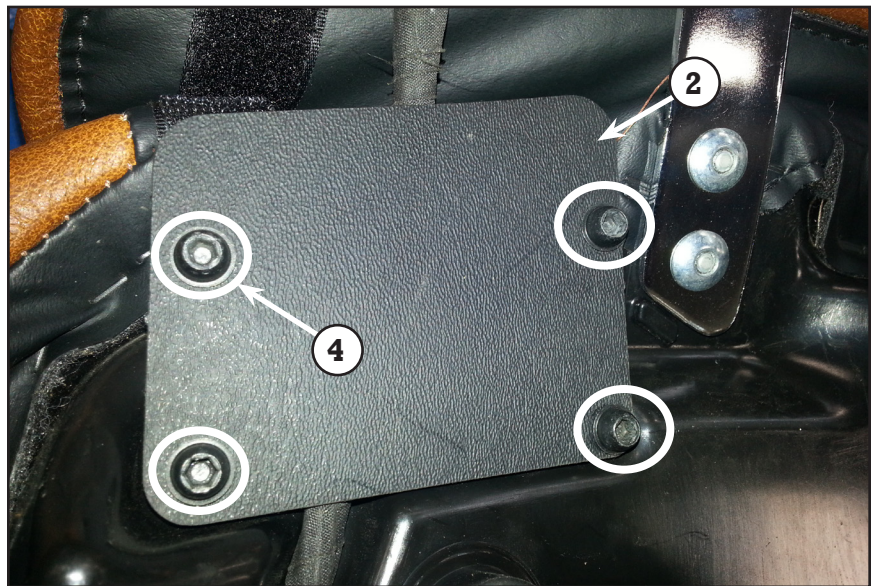

Harness Storage:

When the trunk is not installed on the motorcycle store the harness as shown in figure. Lower the rear seat flap after storing the harness.

