

# RANGER 900 XP OVERHEAD LIGHT LED KIT P/N 2879270



## Application

Ranger 900 XP

Before you begin, read these instructions twice and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

## This Kit Includes:

<u>Qty</u>	<u>Part Description</u>	<u>Part Number</u>
1.....	Harness-Wire, Light, Overhead	2412416
1.....	Light, Overhead, LED, TTN	4014219
5.....	Panduit Strap	7080138
2.....	Screw-10x5/8-Hi/Lo	7518238
6.....	Speed Clip "U" Type (C-55)	7670042
1.....	Instructions	9924482

## Tools Required:

Metric Socket Set


Torx Wrenches

**IMPORTANT:** Your Polaris Ranger 900 XP Overhead Light Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety and to ensure a satisfactory installation, perform all installation steps correctly and in the sequence shown

## INSTALLATION INSTRUCTIONS

1. Park vehicle and remove key.
2. Remove center floor section, seat storage trays and hood. Remove headliner on roof if present. Figure 1.



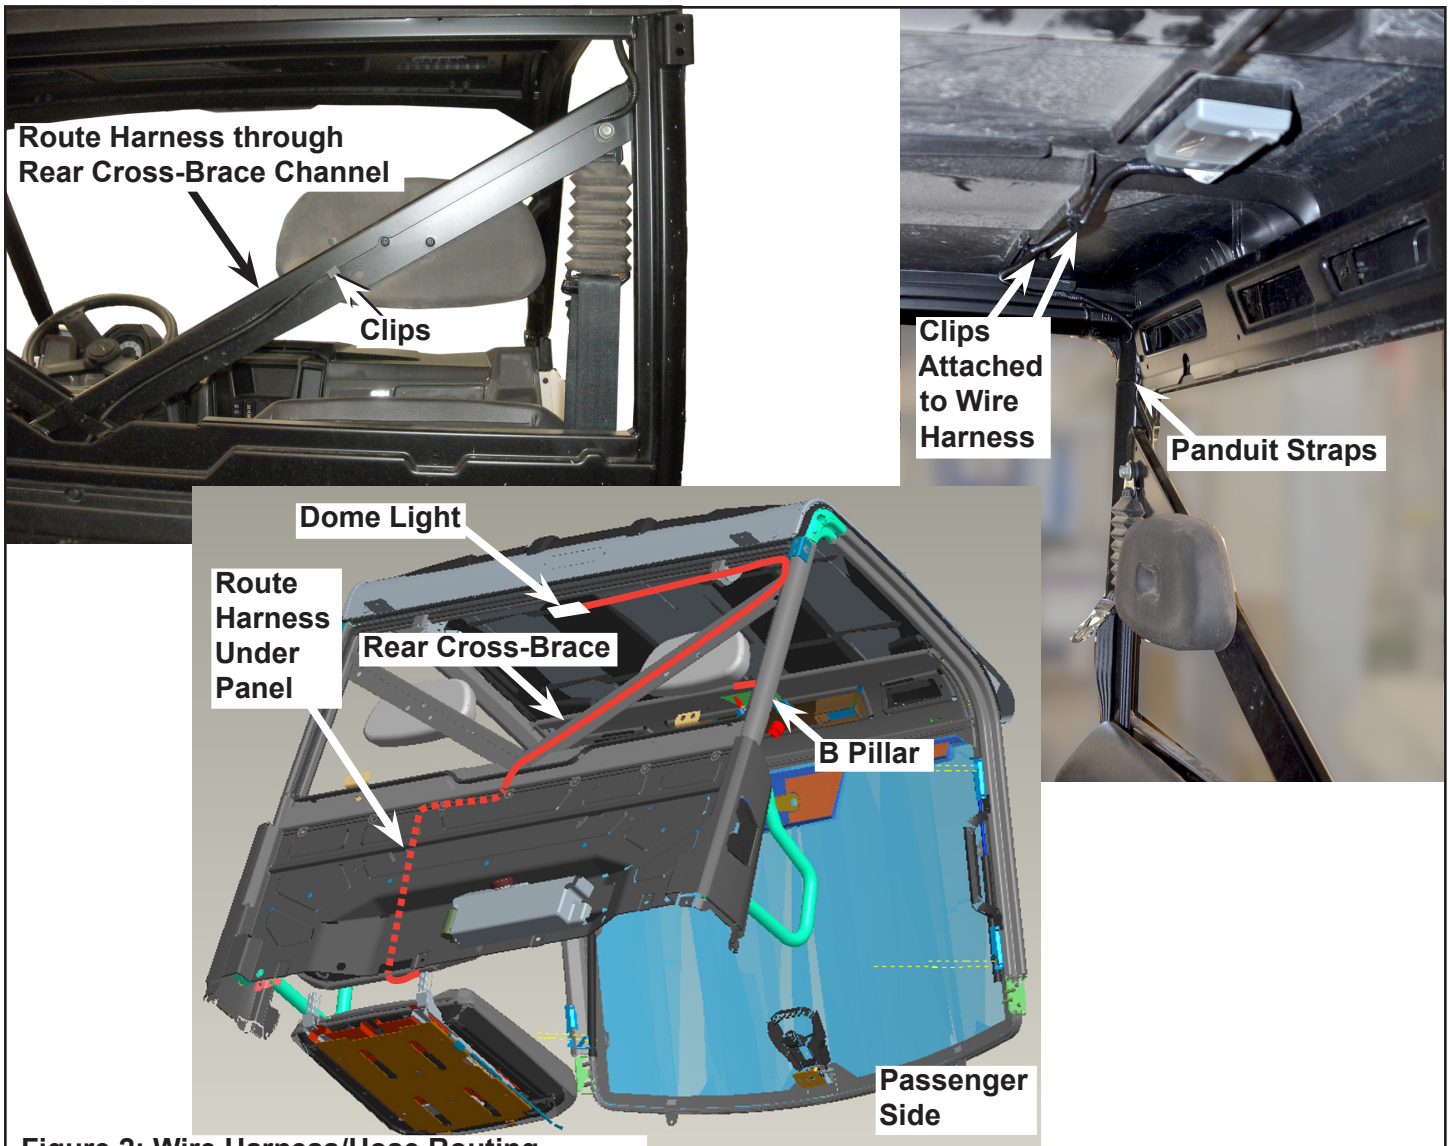

**Figure 2: Wire Harness/Hose Routing**

3. The wire harness is routed from the light toward the passenger's side of the vehicle along the roof and down the rear of the vehicle, through the grommet under the center seat section to the outside of the rear panel and then follows the main wire harness to the front of the vehicle. Figure 2.
4. Route power wires following main harness under seat trays and up through underhood tray. Connect to bus bar Figure 3.
5. Secure wires to main harness or as necessary to prevent contact with hot or moving objects. Reassemble floor and hood.
6. Turn on key. Confirm function of light.

