

RANGER HORN KIT KIT P/N 2875048



Application

2005 Ranger

Before you begin, read these instructions and check to be sure all parts and tools are accounted for.

Please retain these installation instructions for future reference and parts ordering information.

This Kit Contains:

<u>Qty.</u>	<u>Part Description</u>	<u>Part No.</u>
1	Horn	4011408
1	Switch	4010652
1	Wire Harness	2410517
1	1/4"-20 x 3/4" Bolt	7512283
1	1/4"- 20 Flange Nut	7542153
2	Panduit Strap	7080138
1	Instructions	9919464

You Will Need to Supply:


Drill	3/4" Hole Saw	1/4" Drill Bit
Standard Socket Set	Standard Wrench Set	

IMPORTANT: For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

IMPORTANT: Your Polaris Ranger horn is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation of any item is easier if the vehicle is clean and free of debris.

INSTALLATION INSTRUCTIONS

1. Refer to illustration. Drill a 3/4" hole for the switch.
IMPORTANT: Take care, when drilling, that components behind the dash are not damaged.
2. Remove the locking washer and nut from the switch and slip the nut and then the washer over the harness wires for the switch.
3. Route the harness from under the hood through the hole drilled in step 1.
4. Connect the harness to the switch terminals.
5. Insert the switch into the dash and secure it with the washer and nut removed in step 2.

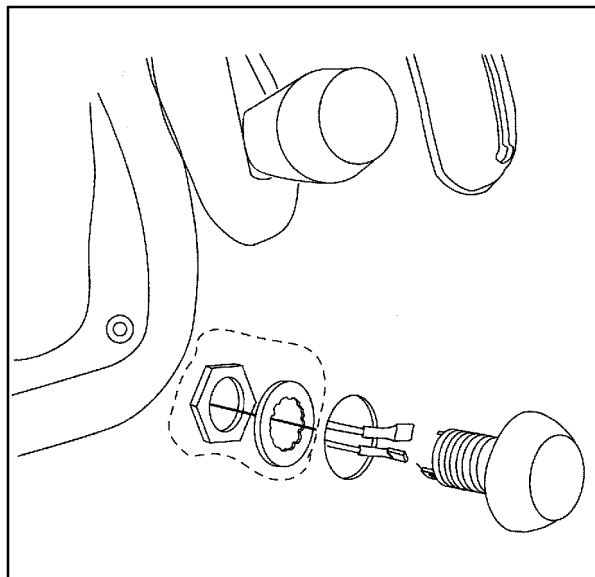

6. Refer to illustration. Using the horn (opening facing downwards) as a template, mark and drill two 1/4" holes for the horn mount bracket on the driver's side dash support plate. One hole is for the locating tab on the bracket.

NOTE: Ensure that the horn does not contact any item under the hood.

7. From the inside of the hood support beam, push a 1/4" bolt through the horn mounting hole. Fasten the horn to the hood support beam using a 1/4" nut.

NOTE: Horn bracket may need to be adjusted to obtain the orientation shown by loosening the nut on back.

8. Connect the harness to the horn.
9. Connect the harness to the accessory terminal block located to the side of the battery.

Power: Bottom Terminal

Ground: Middle Terminal

10. Test the horn for operation.
11. Secure the horn harness with the included panduit straps.

