

ATV HANDGUARD MOUNT KIT

P/N 2879380



POLARIS®

Application

Scrambler 850

Before you begin, read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

This Kit Includes:

<u>Qty.</u>	<u>Part Description</u>	<u>Part Number</u>
1	Asm-Mount, Handguard, LH	1019448
1	Asm-Mount, Handguard, RH	1019449
2	#10x1 Hi/Lo Screw	
8	Star Washer	
2	Bolt, M6x1x40mm	
2	Nut, M6x1	
1	Instructions	9924194

You will need to supply one of the following kits:

Kit-Hand Guard, Sno, Red (PN 2876845) Kit-Hand Guard, Sno, Wht (PN 2876883)
Kit-Hand Guard, Sno, Black (PN 2876846)

Tools Required:

M10 Socket and Wrench

Ratchet


T20, T25, T30 Torx Drivers

APPROXIMATE ASSEMBLY TIME (R&R): 15 minutes


IMPORTANT: For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence as shown on the attached instructions. Please wear safety glasses while performing the steps in the following instructions.

INSTALLATION INSTRUCTIONS


1. Using a T25 Torx driver, remove the two screws from the bottom side of the right hand throttle control and remove bottom clamp.
2. Install right hand handguard mount to bottom of handlebar using the included #10 Hi/Lo screws with a T20 Torx driver.

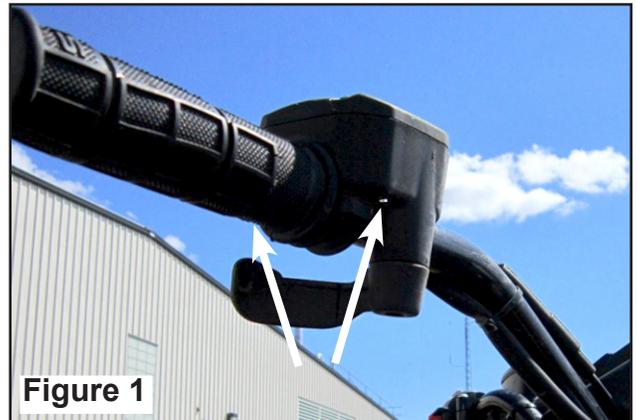

3. Install RH handguard from the handguard kit, over the handguard mount using included M6 bolt, M6 nut and four star washers as shown in Figure 3. Star washers should be on either side of each of the plastic handguard mounts.
4. Orient as desired and tighten bolt and nut using M10 socket and wrench.

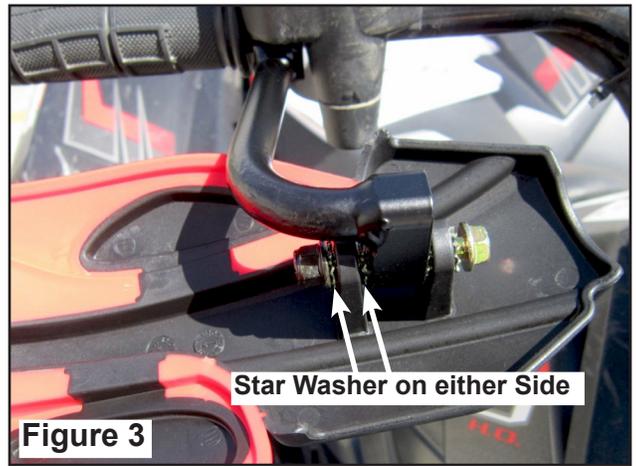

5. Remove the two screws from the top of the brake master cylinder clamp using a T30 Torx driver. Save screws for reassembly.

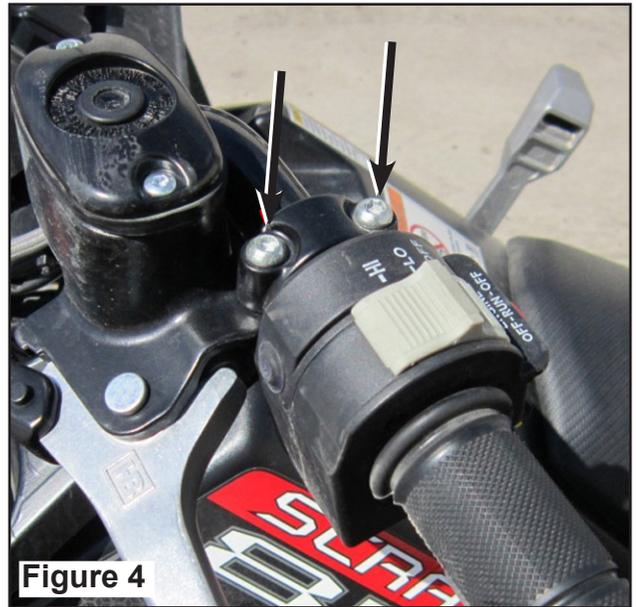

6. Remove clamp and install left hand handguard mount, reusing the screws removed in Step 5.
7. Install LH handguard from the handguard kit, over the handguard mount using the M6 bolt, M6 nut and four star washers from the kit as shown in Figure 3. Star washers should be on either side of each of the plastic handguard mounts.
8. Orient as desired and tighten bolt and nut using M10 socket and wrench.

