

LOCK & RIDE® GUN RACK 6 KIT



P/N 2882159

APPLICATION

Verify accessory fitment at Polaris.com.

NOTE


This Lock & Ride® Gun Rack Kit cannot be used with the Headache Rack Kit (PN 2879976, 2881531)

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

KIT CONTENTS

This Kit includes:

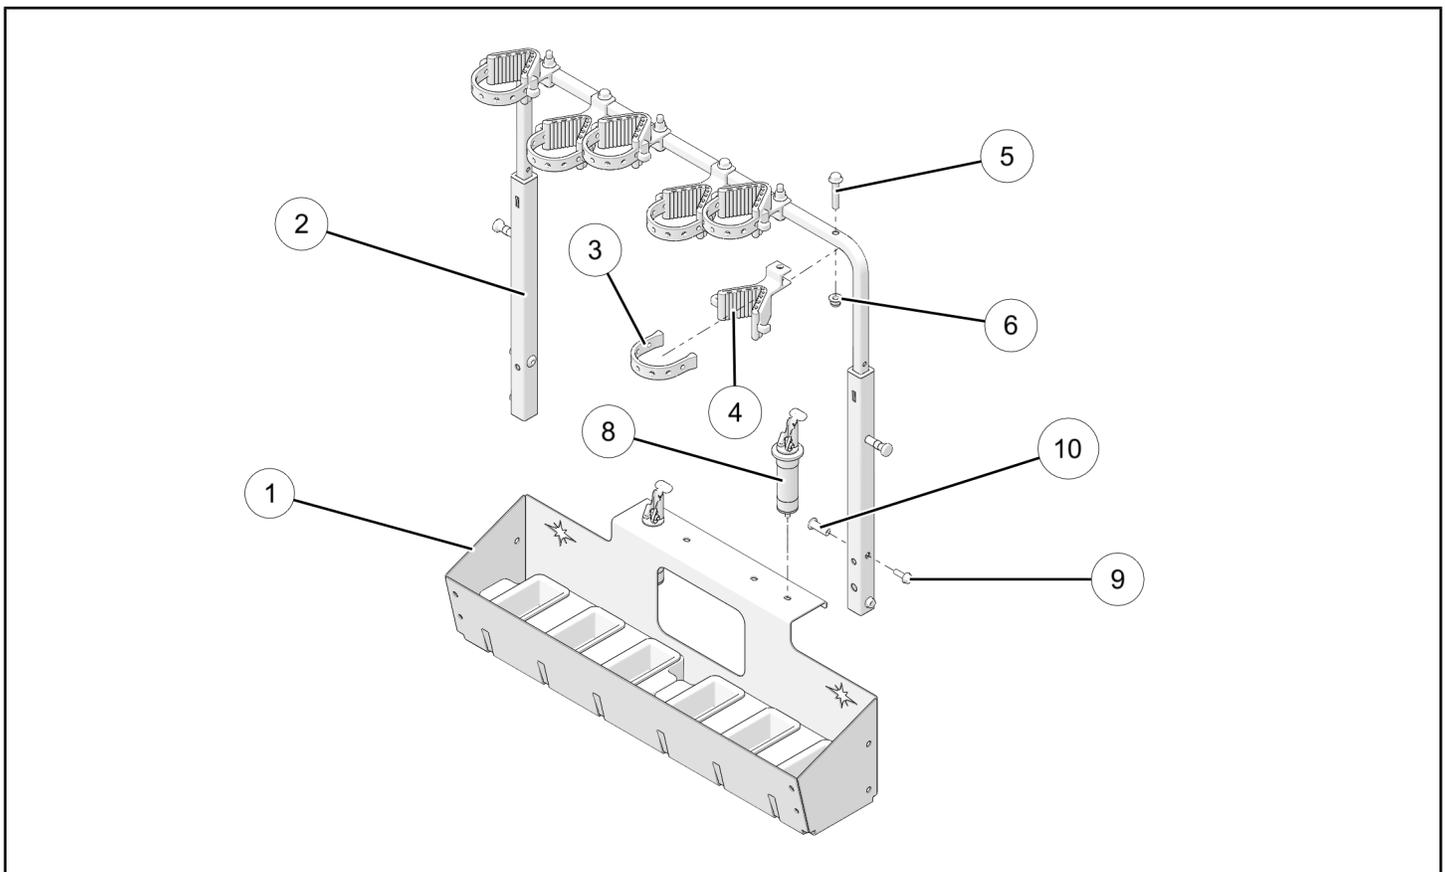

REF	QTY	PART DESCRIPTION	PART NUMBER
1	1	Base	-
2	1	Support, Clamp	-
3*	6	Strap	-
4*	6	Clamp	-
5	6	Screw, Hex Flange - M10 X 1.5 X 45	-

REF	QTY	PART DESCRIPTION	PART NUMBER
6	6	Nut, Hex Flange - M10 X 1.5	7547313
7	-	(unused)	-
8	2	Expansion Anchor Kit, Lock & Ride®	2875250
9	4	Screw, Hex Flange - M8 X 1.25 X 25	7516734
10	2	Nut, Sleeve - M8 X 1.25	-
	1	Instructions	9927313

Items marked (*) are included in Hardware Kit PN 2206433 (only one each of items 3 and 4)

TOOLS REQUIRED

- Safety Glasses
- Hex Key Set, Metric
- Screwdriver, Phillips
- Socket Set, Metric
- Wrench Set, Metric

IMPORTANT

Your Lock & Ride® Gun Rack 6 Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

ASSEMBLY TIME


Approximately 15–20 minutes

INSTALLATION INSTRUCTIONS

1. Shift vehicle transmission into “PARK”. Turn key to “OFF” position and remove from vehicle.
2. Position base ① in vehicle bed, then identify applicable holes for installation of LOCK & RIDE® expansion anchors ⑧. Install anchors to base per anchor kit instructions.


NOTE

Full-Size Ranger accommodates gun rack installation to forward bed wall, or to LH/RH sidewall. All other vehicles require gun mount installation to forward bed wall only.

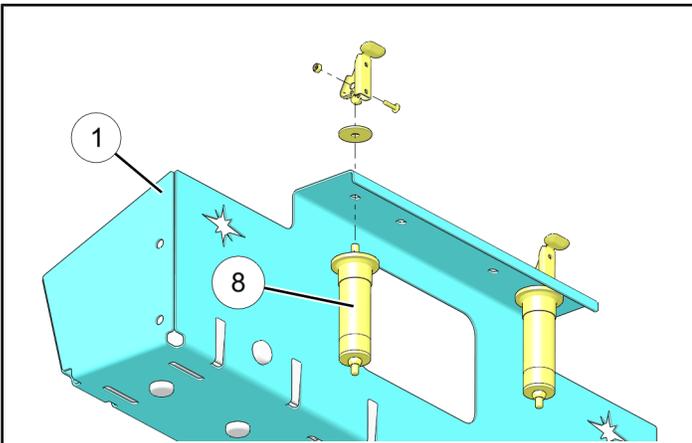


3. Install clamp support ② to base ① using screw ⑨ and nut sleeve ⑩ in upper fastener hole, and screw ⑨ in lower fastener hole (threads into pre-installed insert). Repeat for opposite side.


For installation to LH or RH bed sidewalls install clamp support in upright position:

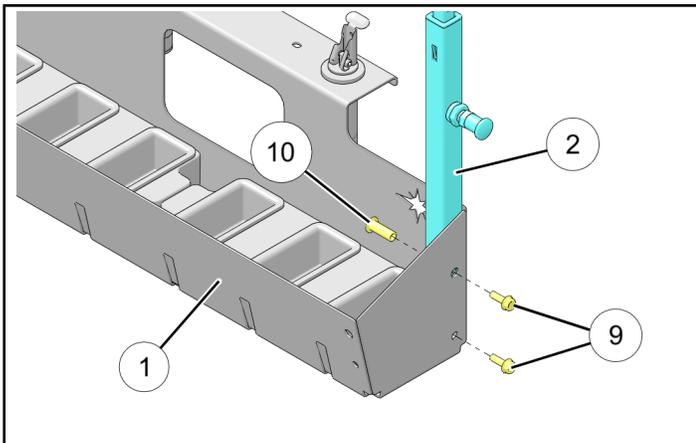

For installation to forward bed wall install clamp support in angled position:

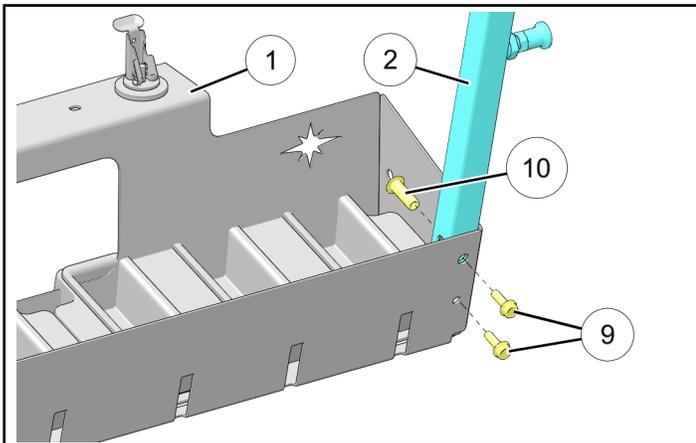


4. Install clamp ④ to clamp support ② using screw ⑤ and nut ⑥. Repeat for remaining positions, alternating orientation of parts.

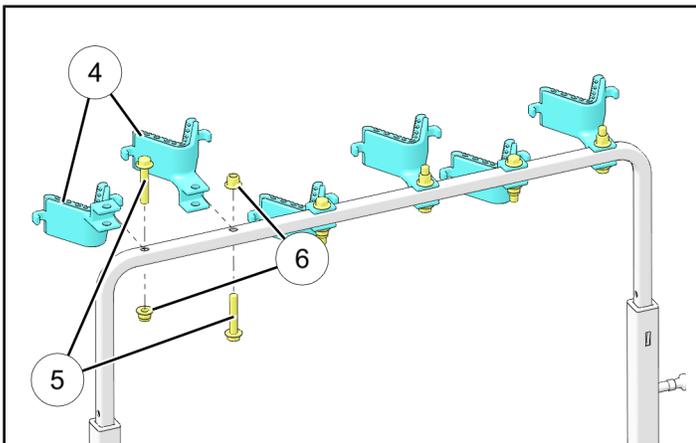

5. Attach strap ③ to clamp ④. Repeat for remaining positions.


IMPORTANT

Adjust straps as required to ensure guns are secured.

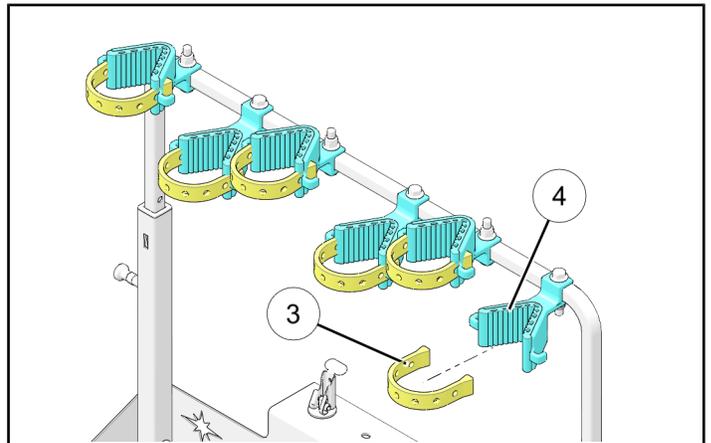

6. Ensure all LOCK & RIDE® expansion anchors ⑧ are unlocked, then install gun rack assembly into bed as shown until anchors are fully seated. Depress levers to lock in place.

If installation is loose, remove gun rack assembly from bed, tighten nut at base of affected anchor(s), and reinstall.

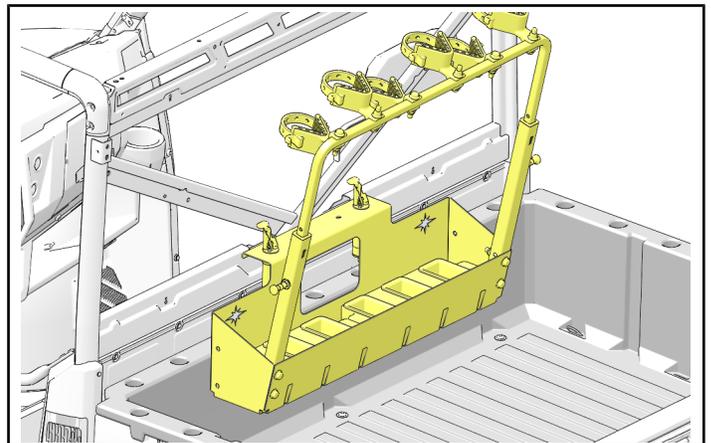

FEEDBACK FORM

A feedback form has been created for the installer to provide any comments, questions or concerns about the installation instructions. The form is viewable on mobile devices by scanning the QR code or by clicking [HERE](#) if viewing on a PC.

