



# Stepsaver

- 9 mph (14 km/h) speed
- 75 in (190 cm) turning radius
- 600 lb (272 kg) load capacity



## EFFICIENT & VERSATILE PERSONNEL CARRIERS



MODEL	SS-534	SS-536
<b>SPEED</b> (unloaded)	10 mph (16 km)	9 mph (14 km)
<b>RANGE</b> (unloaded)	20 mi (32 km)	20 mi (32 km)
<b>LOAD CAPACITY</b>	500 lb (227 kg)	600 lb (272 kg)
<b>TOW CAPACITY</b>	4250 lb (1927 kg)	2,000 lb (907 kg)
<b>BED SIZE</b> (WxL)	27x17 in (112x160 cm)	30x19 in (112x160 cm)

### FEATURES & BENEFITS:

- All-welded unitized steel body
- On-board charger
- Modularized control system
- Customizable to fit your application

\* **Based on Standard Configuration** Actual towing capacity is dependent on application, vehicle configuration, ballast weight, and operating environment.  
**Note:** Photos are shown with optional features.

Taylor-Dunn's Stepsaver provides personnel transportation for executives, supervisors, security, maintenance, mail carriers, and other workers whose jobs keep them on the go.

Stepsaver's versatile design allows you to convert the vehicle from personnel carrier to burden carrier in a matter of seconds. These vehicles can carry up to two people or 600 lb. of load to the job site.

Stepsaver's standard features include horn, modularized control system, tiller-loop steering, on-board charger, and an all-welded steel unitized body and frame. Additional standard features on the SS-536 include headlight, taillight, brake light, and flip-down passenger seat.


Visit our website for images, videos, information, and custom modification ideas at [taylor-dunn.com](http://taylor-dunn.com).



# Stepsaver



## PERFORMANCE

<b>LOAD CAPACITY</b> lb (kg)	<b>534:</b> 500 (227)	<b>536:</b> 600 (272)
<b>TOW CAPACITY</b> lb (kg)	<b>534:</b> 4250 (1927)	<b>536:</b> 2000 (907)
<b>MAX SPEED</b> mph (km/h)	<b>534:</b> 10 (16)	<b>536:</b> 9 (14)
<b>TURNING RADIUS</b>	75 in (190 cm)	

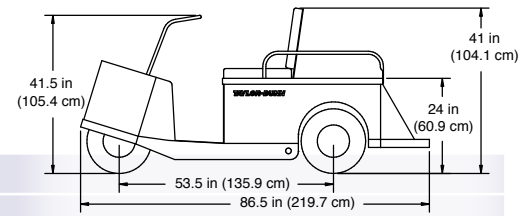

## DIMENSIONS

<b>OVERALL LENGTH</b> in (cm)	<b>534:</b> 76.5 (194)	<b>536:</b> 86.5 (220)
<b>OVERALL WIDTH</b>	30 in (76 cm)	
<b>HEIGHT (- cab)</b>	41.5 in (105 cm)	
<b>HEIGHT (+ cab)</b>	69.5 in (175 cm)	
<b>DECK HEIGHT</b>	24 in (61 cm)	
<b>WHEEL BASE</b>	53.5 in (136 cm)	
<b>DECK SIZE</b> in (cm)	<b>534:</b> 27x17 (69x43)	<b>536:</b> 30x19 (76x48)

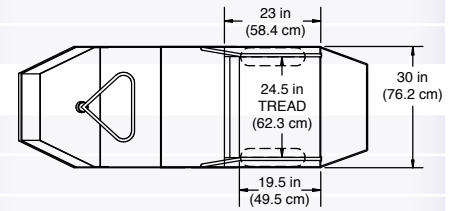

## POWER SUPPLY / DRIVE TRAIN

<b>MOTOR</b>	24V, 935 rpm, DC, Series Wound, 4.5 hp
<b>SYSTEM VOLTAGE</b>	24V DC
<b>TRANSMISSION</b>	Transaxle Assembly, Sealed Helical Gear, 12:1 Reduction
<b>BATTERIES</b>	Four, 6V, 210 Amp-Hour, Lead Acid
<b>CHARGER</b>	Built-in, 24V, 600 Watt, 25 Amp, 110 VAC, w/ Interlock
<b>CONTROLLER</b>	275 Amp, Solid State Speed Controller
<b>WIRING</b>	Modular Harness Design, Weather Protected Connectors

## CHASSIS

<b>FRAME</b>	Fully Welded Unitized 16 Gauge Diamond Plate Steel
<b>STEERING</b>	Tiller Loop, Manual
<b>DRIVE AXLE</b>	<b>534:</b> Belt Drive <b>536:</b> Direct Drive
<b>SUSPENSION</b>	<b>534:</b> Front Shock Absorber, Rear Coil Springs <b>536:</b> Coil Springs, Front and Rear
<b>BRAKES</b>	<b>534:</b> Center Brake Band <b>536:</b> Drum with Foot Operated Parking Brake
<b>TIRES</b>	4.80 x 8 Load Range B Pneumatic

## GENERAL

<b>UNIT WEIGHT</b> lb (kg)	<b>534:</b> 713 (323)	<b>536:</b> 701 (318)
<b>SEAT</b>	<b>534:</b> Seat Cushion, Black Vinyl <b>536:</b> Seat Cushion, Back Rest Converts to Passenger Seat	
<b>INSTRUMENTATION</b>	Battery Status Indicator, Forward/Reverse Selector Switch, Key Switch, Electric Horn, 12V DC/DC Converter (on with key switch)	
<b>LIGHT ACCESSORIES</b>	<b>536:</b> Head Light, Taillight, Brake Light (optional on SS-534)	
<b>CONFORMANCE</b>	Type E OSHA 1910.178, ANSI B56.8	

## OPTIONS

- PORTABLE CHARGER
- SMOOTH SKIN BODY
- STEEL CAB
- STROBE LIGHT
- FRONT BUMPER
- DIAMOND PLATE DECK
- BATTERY WATERING SYSTEM
- HOUR METER
- REVERSE ALARM
- GEARED STEERING
- NON-MARKING TIRES
- SOFT SOLID TIRES
- UNDERCOATING/GALVANIZING
- VARIOUS HITCHES
- OPTIONAL PAINT COLORS

### SS-534 OPTIONS

- FLIP-DOWN PASSENGER SEAT
- HEAD/TAIL/BRAKE LIGHTS
- SPEEDS OF 5,7,OR 9 MPH

Specifications, standard equipment, accessories and modifications are subject to change without notice.