



BIGFOOT GAS G-1500

- Gasoline powered
- 18 mph (29 km/h) speed
- 100 mi (161 km) range



ERGONOMIC COMFORT & VEHICLE PERFORMANCE



Taylor-Dunn's BIGFOOT provides maximum comfort with the large operator's compartment, tilt steering, contoured sliding adjustable seats, which increases legroom and reduces operator fatigue.

This gas-powered vehicle will take you the distance, up to 100 miles, and at speeds up to 18 miles per hour.

Additional standard features include, hydraulic disc brakes, recessed tie-downs, and 12 gauge smooth skin unitized steel body.

Visit our website for additional vehicle images, videos, information and custom modifications at www.taylor-dunn.com.

ENERGY	Gasoline powered	
SPEED	up to 18 mph	up to 29 km/h
RANGE	100 mi	161 km
LOAD CAPACITY	up to 1,500 lb	680 kg
BED SIZE (W x L)	44x77 in	112x196 cm
TURNING RADIUS	137 in	348 cm

*** Based on Standard Configuration**

Typical Capacity: Actual load capacity depends on application and vehicle configuration.

FEATURES & BENEFITS:

- Large Operator's Compartment
- Tilted Steering
- Adjustable Seats



Ample Foot Room



Adjustable Seats



LED Lighting



Recessed Tie-downs



Large Compartment



Left Foot Rest




Tilted Steering




PERFORMANCE

LOAD CAPACITY	1,500 lb	680 kg
TOW CAPACITY	5,000 lb	2268 kg
MAX SPEED (UNLOADED)	18 mph	29 km/h
TURNING RADIUS	137 in	348 cm

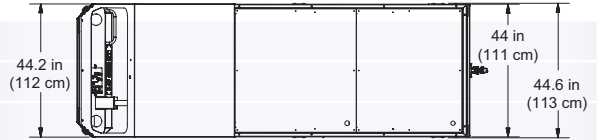

DIMENSIONS

OVERALL LENGTH	130.5 in	332 cm
OVERALL WIDTH	44.5 in	113 cm
HEIGHT (- cab)	50 in	127 cm
HEIGHT (+ cab)	74 in	188 cm
WHEEL BASE	62 in	158 cm
GROUND CLEARANCE	4 in	10 cm
BED SIZE	44 x 77 in	112 x 196 cm

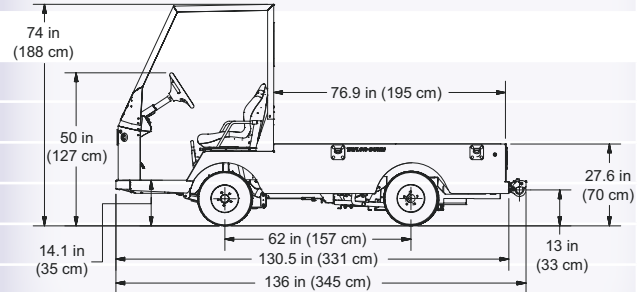

POWER SUPPLY / DRIVE TRAIN

MOTOR	19 hp, four-stroke, gasoline
TRANSMISSION	Continuous variable pitch V-belt to forward and reverse gearbox
CLUTCH	Automatic centrifugal engagement
DIFFERENTIAL	Bevel gear, 13.87:1 axle ratio
BATTERIES	12V, 61 amp-hour
CHARGING SYSTEM	20 amp flywheel alternator
STARTER	12V electric with electronic ignition
GOVERNOR	Oil bath flywheel

CHASSIS

FRAME	Fully welded, unitized, 12 gauge, smooth skin steel body
STEERING	Rack and pinion
SUSPENSION	Multi-leaf springs, front and rear
BRAKES	All wheel hydraulic disc brakes with hand-operated parking brake
BUMPERS	Heavy duty steel integrated front & rear
TIRES	5.70 x 8, load range C, pneumatic

GENERAL

UNIT WEIGHT	1410 lb (640 kg)
FUEL	9 U.S. gallons (34 liters)
SEATS	Black adjustable bucket seats, driver's seat electrical interlock, 2 person
INSTRUMENTATION	Ignition starter, hour meter, low oil indicator, fuel gauge, reverse buzzer, light switch, and electric horn
LIGHT ACCESSORIES	Dual LED headlights, taillights and brake lights, reverse lights, marker lights
CONFORMANCE	Type G OSHA 1910.178, ANSI B56.8

OPTIONS

- FOLD-AWAY SEATS
- ALUMINUM DROP-DOWN SIDES
- WINDSHIELD WIPERS
- STAKE SIDES
- ECONO CAB & VINYL DOORS
- VARIOUS HITCHES
- LADDER RACK
- MID-RANGE CAB & STEEL DOORS
- UNDERCOATING
- STROBE LIGHT
- LOCKABLE CARGO BOX
- GALVANIZED FRAME
- DIAMOND PLATE DECK
- DIRECTIONAL SIGNALS
- OPTIONAL PAINT COLORS



CONTRACT # 051717-PSI



*Specifications, standard equipment, accessories and modifications are all subject to change without notice.

LS-G40-00 07/18