

YPB#: PB_HUR_SunDeckSport192RLOB_VF115XA_2017-08-28_DCK

Test Date 8/28/17



Hurricane


Boat Manufactured By:
Hurricane Boats • 4500 Middlebury Street • Elkhart, IN 46516
574-522-8381 • www.hurricaneboats.com

PERFORMANCE DATA

RPM	MPH	GPH	MPG
1000	3.9	0.5	7.80
1500	5.5	0.8	6.88
2000	6.7	1.2	5.58
2500	7.6	1.9	4.00
3000	8.5	3.0	2.83
3500	12.0	4.1	2.93
4000	20.6	4.3	4.79
4500	25.6	4.9	5.23
5000	29.1	6.2	4.69
5500	32.8	8.3	3.95
6000	35.2	10.2	3.45
6300	38.5	12.2	3.16

0~20 MPH

6.80

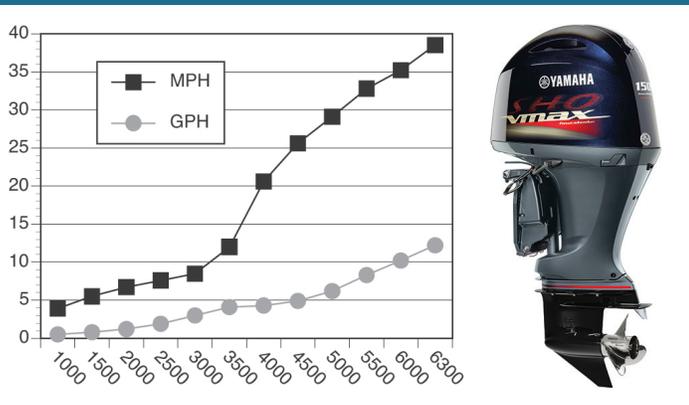

Test performed and verified by Yamaha Applications Engineers.



Hurricane® SunDeck Sport 192 RL OB

Length	18' 10"
Beam	8' 4"
Dry Weight (Boat Mfr. Pub)	2,600 lbs
Maximum HP	200
Fuel Capacity	36 gal
Weight as Tested	3,727 lbs

VF115XA V MAX SHO®

Horsepower	115 HP
Induction	EFI
Displacement	111.8 cu in
Weight	386 lbs
Gear Ratio	2.15:1

ENGINE MOUNTING HEIGHT

Mounting Hole Position	#2
------------------------	----

PROPELLERS

Series	Talon GP™
Diameter/Pitch	13-1/2 x 15
Yamaha Part #	6FP-45943-00-00
Propeller Material	Aluminum

TEST CONDITIONS

Number of People	2
Air / Water Temperature (Fahrenheit)	76 / 74° F
Elevation (in feet above sea level)	840'
Wind Velocity	5-10 mph

Comments: Test weight includes 34 gallons of fuel, 1 battery, safety and test gear.

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

For more information

Yamaha Motor Corporation, U.S.A.
OEM Division, Marine Group

1270 Chastain Road NW

Kennesaw, GA 30144 • (800) 88-YAMAHA

For other Performance Bulletins, visit www.yamaha-motor.com.