# **RANGER / UTV WINDSHIELD** KIT PN 2876958 / 2876959 Application Polaris Ranger Model Year 09 +

<sup>1</sup>/<sub>4</sub> Fender Washers



Before you begin, read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

#### **Kit Components:**

8

QTY.	Part Description	QTY.	Part Description
1	Lower windshield assy.	12	<sup>1</sup> /4-20 Nylon lock nuts
1	Upper windshield assy.	8	Rubber coated clamps
12	<sup>1</sup> / <sub>4</sub> -20 x 1.00" Screws	1	Instruction sheet
8	<sup>1</sup> / <sub>4</sub> Flat Washers		


**IMPORTANT:** Your Polaris accessory kit is exclusively designed for your Polaris vehicle. Please read the installation instructions and operator's manual thoroughly before beginning. Installation of any item is easier if the vehicle is clean and free of debris. Approximate Installation Time: 20 Minutes

#### **Replacement parts:**

Hardware kit: 2877393-067H Upper side bulb trim: 2857781 Lower end bulb trim: 2857782

### **INSTALLATION INSTRUCTIONS**

- 1. Assemble Windshield: Refer to figure one. Position upper and lower windshields together. Assemble them together using four screws, eight flat washers, and four flange nuts as shown. **NOTE:** Torque fasteners to 25 in-lbs. - do not over tighten.
- 2. For ease of assembly the trim has been applied to the upper windshield, once you assemble the lower to the upper you must finish by pressing the trim from the upper onto the lower shield and trim to length.
- 3. Install windshield on machine: Refer to figure one again.

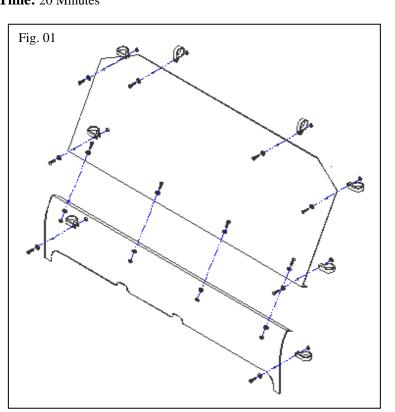

Position windshield onto machine. Place the eight clamps around the perimeter of the cab frame. Now install the windshield to the clamps using the remaining 8 screws, fender washers, and flange nuts as shown.

NOTE: Torque fasteners to 25 in-lbs. - do not over tighten.

## **Cleaning Instructions:**

- 1. Use a high pressure water supply to rinse the large dirt particles from the windshield.
- 2. Once the majority of dirt is removed, use warm soapy water and a cotton terry cloth to wash all windshield components.
- 3. Rinse thoroughly and allow to air dry.
- 4. Use a premium plastic cleaner/polish such as *Plexus*®or *Novus*® to properly clean the viewing area of the windshield. (Never use paper towels, only use clean cotton terry cloths.)